


# STANDARD

## Resistive Touch Panel Specification 554 4-Wire Series

**RoHS compliant**

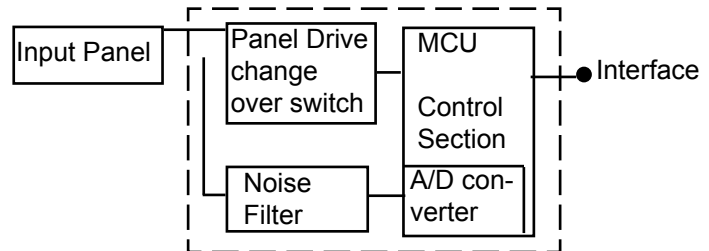

### ■ FEATURES

- Superior quality standard 4 wire resistive analog touch panel
- Excellent specification and high quality
  - Anti Newton ring technology
  - High reliability materials
- Pen/finger type
- Transparency - 80% typical
- RoHS compliant

### ■ PART NUMBERS

Touch Panels:

| Part Number    | Size  | Type                                                 | Part Number    | Size | Type                                     |
|----------------|-------|------------------------------------------------------|----------------|------|------------------------------------------|
| T010-1201-T200 | 17.0" | Pen/Finger                                           | T010-1301-T320 | 7.0" | Pen/Finger (82%, AS)                     |
| N010-0554-T902 | 15.0" | Pen/Finger                                           | N010-0514-T003 | 6.5" | Pen/Finger (W 16:9, Automotive, 82%, AS) |
| N010-0554-T813 | 12.1" | Pen/Finger (AS, DPET)                                | N010-0514-T005 | 6.5" | Pen/Finger (W 16:9, Automotive, 88%, AS) |
| N010-0554-T814 | 12.1" | Pen/Finger                                           | T010-1301-T350 | 6.5" | Pen/Finger (W 16:9)                      |
| N010-0554-T805 | 12.1" | Pen/Finger                                           | N010-0518-T342 | 6.4" | Pen/Finger (78% polarized)               |
| N010-0554-T351 | 10.4" | Pen/Finger (86%, AS)                                 | N010-0554-T048 | 6.4" | Pen/Finger (86% clear)                   |
| N010-0554-T352 | 10.4" | Pen/Finger (82%, AS)                                 | N010-0554-T043 | 6.4" | Pen/Finger (80%, AG)                     |
| N010-0554-T347 | 10.4" | Pen/Finger                                           | N010-0554-T009 | 5.7" | Pen/Finger                               |
| N010-0516-T104 | 10.4" | Pen/Finger (86%, Clear)                              | N010-0554-T015 | 5.7" | Pen/Finger                               |
| N010-0519-T742 | 8.4"  | Pen/Finger (86% Clear)                               | N010-0554-T241 | 4.3" | Pen Finger (86%, AS, DPET)               |
| N010-0554-T504 | 8.4"  | Pen/Finger (0.7mm glass)                             | N010-0556-T408 | 3.9" | Pen/Finger (86% Clear)                   |
| N010-0554-T511 | 8.4"  | Pen/Finger (1.1mm glass)                             | N010-0554-T703 | 3.8" | Pen/Finger                               |
| N010-0516-T947 | 8.1"  | Pen/Finger (1.1mm glass)                             | N010-0516-T407 | 3.7" | Pen/Finger (0.7mm glass)                 |
| N010-0514-T101 | 7.0"  | Pen/Finger (W 16:9, Auto-motive, 82%, AS, 50mm tail) |                |      |                                          |

### ■ PART NUMBERS

Controller Boards:


| Part Number    | Type          |
|----------------|---------------|
| N16B-0558-B270 | 4-Wire, RS232 |
| N16B-0558-B730 | 4-Wire, USB   |

### ■ PART NUMBERS

Interface Controller Chips:

| Part Number    | Type          |
|----------------|---------------|
| N010-0559-V036 | 4-Wire, RS232 |
| NC41120-0018   | 4-Wire, USB   |

## ■ DIMENSION EXAMPLE (10.4" SHOWN)

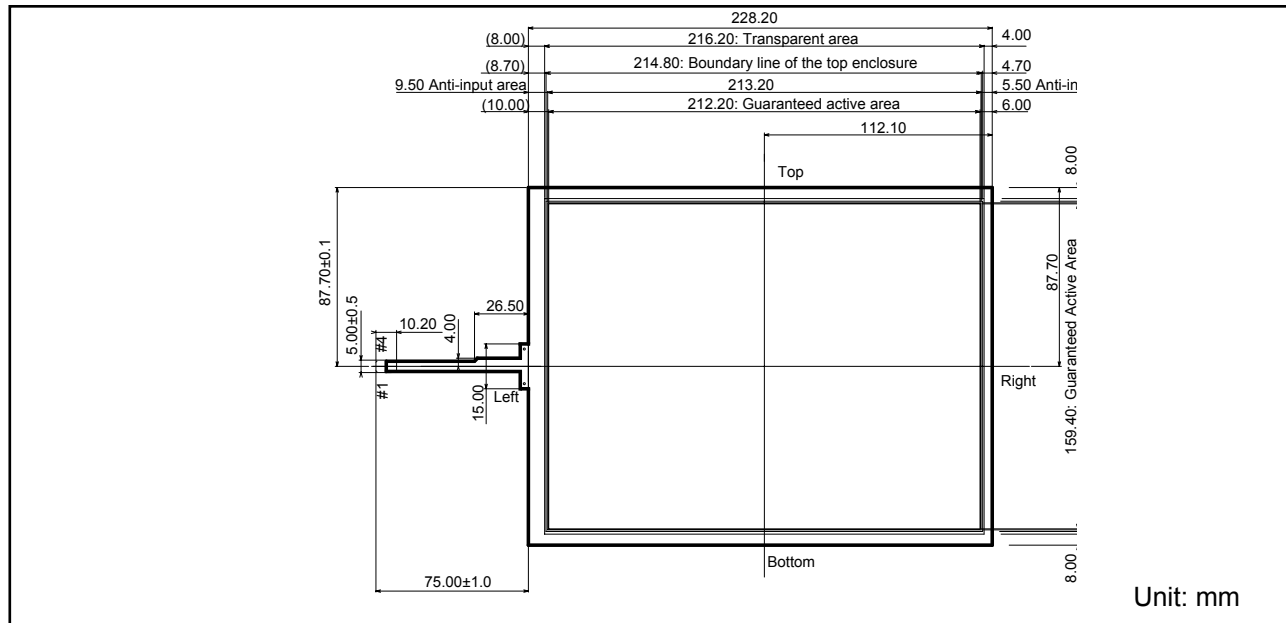

## ■ DETAILED SPECIFICATION

### ■ 1.0 APPLICATION

This specification applies to the standard FID-554 series Touch Panel (Pen/Finger type).

### ■ 2.0 ADDITIONAL APPLICATIONS

Complete specification document is available upon request for customers with whom we have an approved NDA in place.

### ■ 3.0 DESCRIPTION AND BLOCK DIAGRAM

This panel in combination with a control IC chip is used to transfer the co-ord to the host system (see block diagram above).

### ■ 4.0 DRAWING (Please see the diagram above.)

Definitions of the major dimensions indicated on this diagram:

- Effective Input Area (A)** Area guaranteed to meet all the characteristics detailed in this specification
- Anti-input Area (C)** An insulating area allowed to protect the touch panel from giving false readings when an enclosure touches the panel. (See fixing instructions)


## ■ 5.0 CHARACTERISTICS

### ■ 5.1 MECHANICAL

- Operating Force** 0.05~0.49 N (5 ~ 50gF) Measured with a Silicon Measurement Rod R 8 (Round type 8mm) Silicon Rubber Hardness 60°C
- Hardness of Surface** Pencil hardness 3H minimum against specification JIS K-5400

### ■ 5.2 OPTICAL

- Transparency** 78% min. measured in the effective input area to JIS K 7105 using a MURAKAMI SHIKISAI KENKYUSHO type IIR 100 meter.
- Haze** 5% type measured in the effective input area using a MURAKAMI SHIKISAI KENKYUSHO type IIR 100 meter with an Anti Glare treated

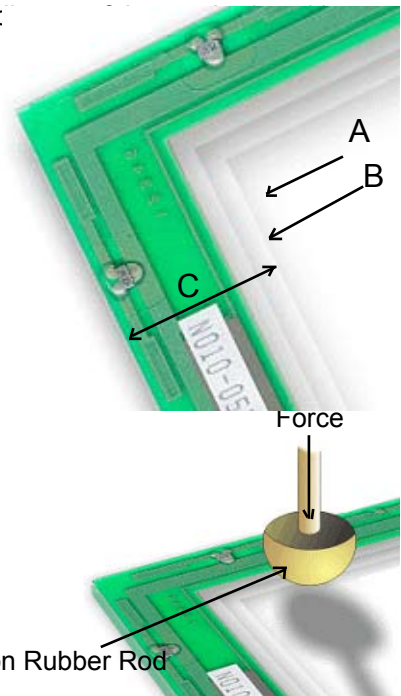

## ■ 5.3 ELECTRICAL


|                                    |                                                        |
|------------------------------------|--------------------------------------------------------|
| <b>Rated Voltage:</b>              | DC 7V max.                                             |
| <b>Resistance X axis:</b>          | 300 to 850 $\Omega$ (at the connector)                 |
| <b>Resistance Y axis:</b>          | 100 to 600 $\Omega$ (at the connector)                 |
| <b>Switch Bounce (Chattering):</b> | 20ms min when using the silicon rubber measurement rod |
| <b>Insulation resistance:</b>      | 10M $\Omega$ minimum at 25KV DC                        |
| <b>Dielectric Strength:</b>        | No problems when at 25KV DC for 1 minute               |
| <b>Linearity:</b>                  | 2% max.                                                |

### Note 1:

Measurement condition of linearity is corrected within the control IC. In general the location accuracy is specified as follows:

**Actual co-ordinate point - theoretical co-ordinate point = location accuracy.**

In general a 9 point co-ordinate calibration system is used to adjust the micro controller accuracy. (20 point can be used in combination with an EEPROM design).

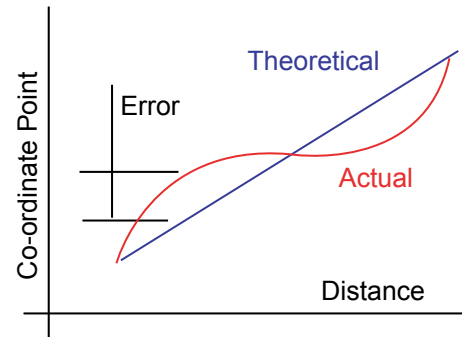

## ■ 5.4 ENVIRONMENTAL



|                                   |                                                                                                                                                                                         |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Temperature (*):</b> | -5°C to 60°C                                                                                                                                                                            |
| <b>Storage Temperature:</b>       | -20°C to 70°C                                                                                                                                                                           |
| <b>Operating Humidity:</b>        | 20% to 85% RH with a Maximum wet bulb temperature of 38°C                                                                                                                               |
| <b>Storage Humidity:</b>          | 10% to 90% RH with a Maximum wet bulb temperature of 38°C                                                                                                                               |
| <b>Chemical Resistance:</b>       | Coating with the following chemicals and storing at room temperature for 2 hours gives no problems. 10% NaCl-water solution, ethyl-acetate, ethyl-alcohol, toluene, methyl-ethyl-ketone |
| <b>Low Air Pressure:</b>          | No issues down to 0.5 x Normal Air pressure                                                                                                                                             |

## ■ 5.5 PEN LIFE

|                          |                         |
|--------------------------|-------------------------|
| <b>Note taking life:</b> | 100,000 words minimum   |
| <b>Input life :</b>      | 1,000,000 times minimum |

### Note 1:

Words are written in the notes area and the size of the word is 7.5mm x 6.75mm. A word is any Alphabet / Number / Mark. The pen is as shown below and applies a force of 250g. A failure is judged to happen when the current consumption or insulation resistance or dielectric strength are not met as shown in 5.3. The location accuracy with 9 point calibration must be  $\pm 4.4$  mm max.

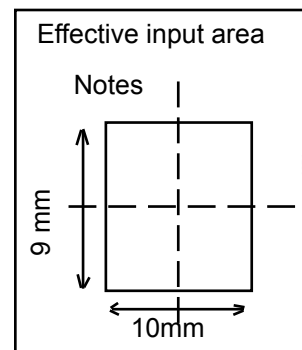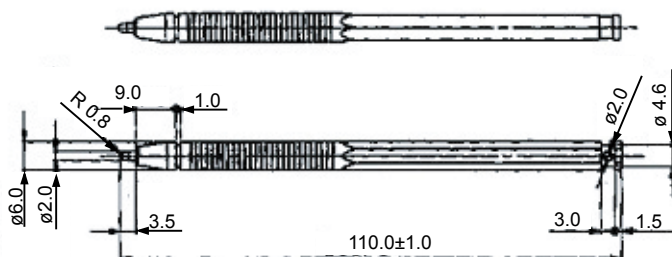


## ■ 5.6 FINGER LIFE



A finger is simulated by a silicon rubber plunger R8 (Round type 8mm size) hardness 60°C at 200g at frequency 5Hz.

A failure is judged to happen when the current consumption or insulation resistance or dielectric strength are not met as shown in 5.3. The location accuracy with 9 point calibration must be  $\pm 4.4$  mm max. Operating force is 150g max.



## ■ 5.7 INFORMATION ON THE PANEL

Production year 99 00 etc.

9 0 1      The left side number shows production year, eg 1999

0 1 2      The left side number shows production year, eg 2000

[ . . . . . ]      The first dot after the space shows production month, eg May  
[ . . . . . ]      The first dot after the space shows production month, eg June

## ■ 6 PACKAGING

### ■ 6.1 PACKING SPECIFICATION


Vibration:      10~55 Hz at 1 Octave per minute 10G 20 cycles with one side 0.75mm

Drop test:      60cm Drop 1 corner, 3 crease lines and 6 faces. 1 each 1 time

After the test no glass:      flaw or crack is seen, and no dent or scratch on the film.  
Also glass and film must not separate.


### ■ 6.1 PACKING DETAILS

Each touch panel is placed into a plastic bag and is held in place by a slit cut into the side of the cardboard. A second insertion piece is placed into the carton to again add stability. The qty is written on the side of the box. For example the N010-0554-T001 has 80 pieces per box.

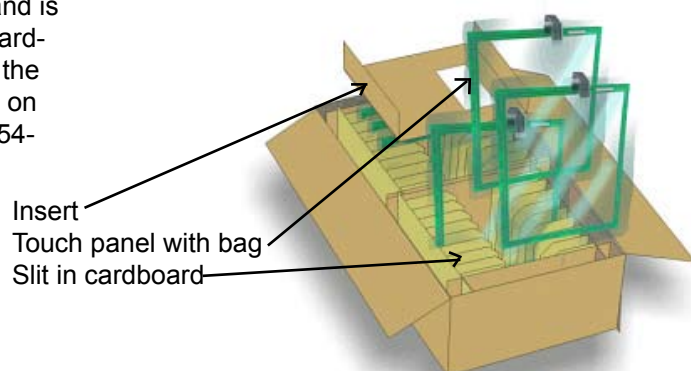

550 Type panel illustrated (554 type packed a similar way)

## ■ 7.0 REJECT CRITERIA
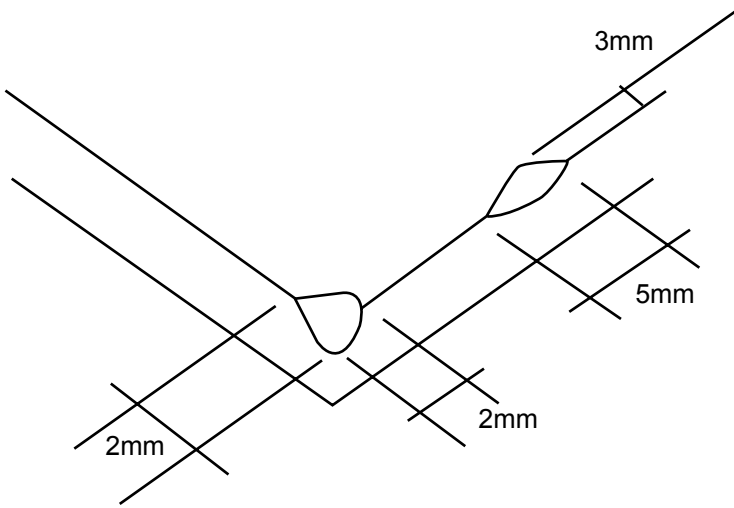
| Description                             |           | Reject Criteria                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           |
|-----------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| Film Dent                               |           | Area $\geq 0.1\text{mm}^2$<br>Area $\geq 0.05\text{mm}^2$ & area $< 0.1\text{mm}^2$<br>Area $< 0.05\text{mm}^2$                                                                                                                                                                                                                                                                                                                                                            | : to be zero<br>: to be max. 5 points<br>: none specified |
| Foreign material between glass and film | Dot type  | Area $> 0.1\text{mm}^2$<br>Area $\geq 0.05\text{mm}^2$ & area $< 0.1\text{mm}^2$<br>Area $< 0.05\text{mm}^2$                                                                                                                                                                                                                                                                                                                                                               | : to be zero<br>: to be max. 5 points<br>: none specified |
|                                         | Line type | Area $> 0.1\text{mm}$<br>Area $\geq 0.03\text{mm}$ & width $< 0.1\text{mm}$ and length $< 10\text{mm}$<br>Area $< 0.05\text{mm}$                                                                                                                                                                                                                                                                                                                                           | : to be zero<br>: to be max. 1 point<br>: none specified  |
| Scratch                                 |           | Area $\geq 0.1\text{mm}$<br>Area $\geq 0.03\text{mm}$ & width $< 0.1\text{mm}$ with length $< 80\text{mm}$<br>Area $< 0.03\text{mm}$ & width $< 0.1\text{mm}$ with length $< 30\text{mm}$                                                                                                                                                                                                                                                                                  | : to be zero<br>: to be max. 1 point<br>: none specified  |
| Dot blur or hard coat missing           |           | Area $\geq 0.5\text{mm}^2$<br>Area $\geq 0.03\text{mm}^2$ & area $< 0.5\text{mm}^2$<br>Area $< 0.05\text{mm}^2$                                                                                                                                                                                                                                                                                                                                                            | : to be zero<br>: to be max. 5 points<br>: none specified |
| Newton Ring                             |           | These must not be seen from Panel film side under a fluorescent lamp (3 wavelength type lamp). Not to be verified form glass side.                                                                                                                                                                                                                                                                                                                                         |                                                           |
| Glass flaw                              |           | To be no flaw which is bigger than that shown in the following diagram. The number of flaws is not specified.                                                                                                                                                                                                                                                                                                                                                              |                                                           |
|                                         |           |  <p>The diagram illustrates a glass flaw. It features a central oval-shaped flaw. Two intersecting lines, representing the glass surface, pass through the flaw. Dimensions are indicated: a horizontal line segment of 2mm is shown below the flaw, a diagonal line segment of 3mm is shown above the flaw, and a vertical line segment of 5mm is shown to the right of the flaw.</p> |                                                           |


## ■ 8.0 GENERAL POINTS OF CAUTION

Touch panels are made of glass, so care must be taken in handling them. Do not stress, pile, bend, lift by the cable or put any stress on the film, for example moving by film face vacuum. In order to clean wring dry a cloth which has been emersed in a natural detergent. DO NOT use any organic solvent, acid or alkali solution. Watch the edge of the panel when cleaning, again for safety reasons.

## ■ 9.0 CONNECTION AND MOUNTING


The details below indicate the recommended mounting structure for panel and enclosure. The enclosure support to fix the touch panel must be over 1.0mm width and must be outside the view (Transparent area). Also ensure that the enclosure does not cause miss input by touching the view area.

The following diagram shows that the enclosure edge must be between the View area and the guaranteed active area. Ensure space is allocated for the diodes, and we recommend that the material to fix the panel and enclosure is elastic. Special design would be required to stop water ingress. The corners of the touch panel are conductive so do not touch any metal parts after mounting.

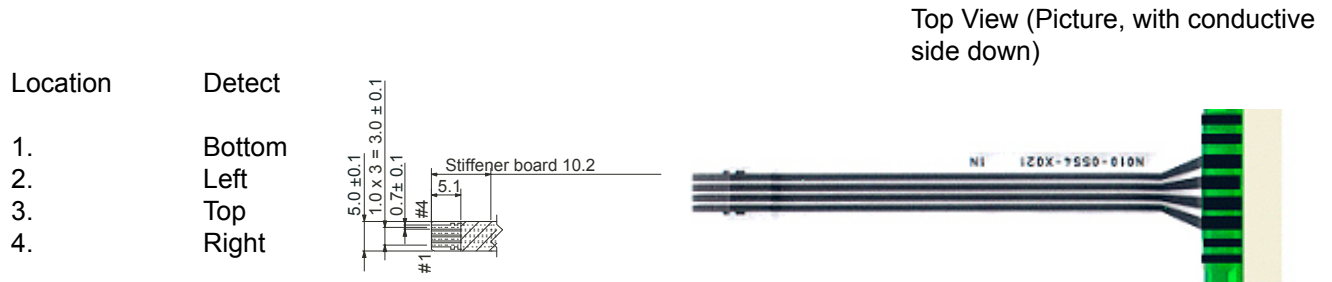


(Drawing) with conductive connector and glass side down. See page 1 for detail of connector exit side which is left.

(Mating connector type FCI or equivalent SFW4R-1STAE1-LF: for FPC)

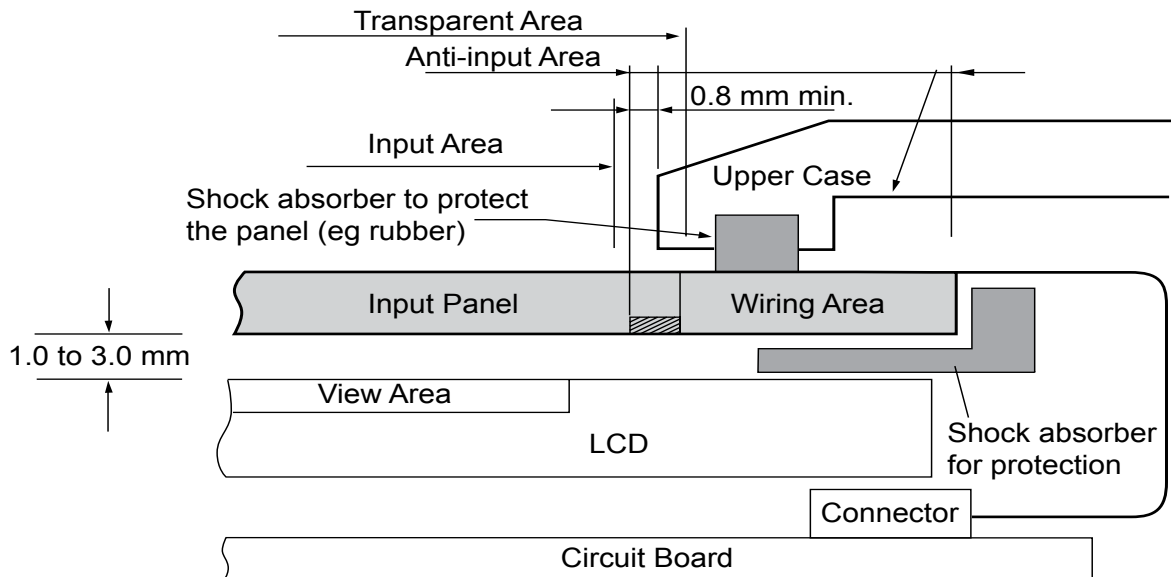

## ■ 10.0 PANEL THICKNESS (typical)

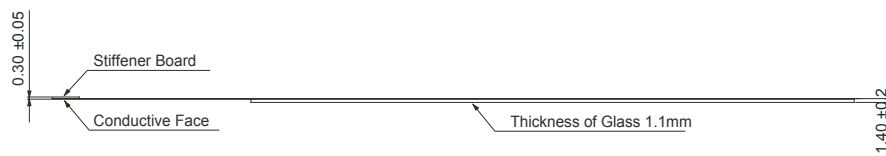

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
 Gotanda-Chuo Building  
 3-5, Higashigotanda 2-chome, Shinagawa-ku  
 Tokyo 141 8630, Japan  
 Tel: (81-3) 5449-7010  
 Fax: (81-3) 5449-2626  
 Email: [promothq@fcl.fujitsu.com](mailto:promothq@fcl.fujitsu.com)  
 Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
 250 E. Caribbean Drive  
 Sunnyvale, CA 94089 U.S.A.  
 Tel: (1-408) 745-4900  
 Fax: (1-408) 745-4970  
 Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
 Web: <http://us.fujitsu.com/components/>

### Europe

Fujitsu Components Europe B.V.  
 Diamantlaan 25  
 2132 WV Hoofddorp  
 Netherlands  
 Tel: (31-23) 5560910  
 Fax: (31-23) 5560950  
 Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
 Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
 102E Pasir Panjang Road  
 #01-01 Citilink Warehouse Complex  
 Singapore 118529  
 Tel: (65) 6375-8560  
 Fax: (65) 6273-3021  
 Email: [fcal@fcal.fujitsu.com](mailto:fcsl@fcal.fujitsu.com)  
 Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2007 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
 Rev. October 30, 2007.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9