



# PET-102GT++

## Industrial 2-port Gigabit High Power PoE++ Extender

### Features

- Support 1 port PoE P.D. input to 2 port POE P.S.E output with 10/100/1000 Base-T(X) for power and data extender
- Support P.S.E. based on IEEE 802.3af/at standard
- PoE P.D. input support 90watts max.
- PoE P.S.E. output support 90watts max. per port
- Multiple unit , daisy-chain installation support
- High reliability and rigid IP-30 housing
- DIN-Rail and wall mount design




### Introduction

ORing PET-102GT++ is a high power PoE extender and compatible with IEEE802.3at/af<sup>[Note1]</sup> standard. With one 10/100/1000TxBase-T(X) P.D. input port and two 10/100/1000TxBase-T(X) P.S.E. output ports, the device not only pass on Ethernet data but also feed on and forward power from the previous PoE device to the next device. Furthermore, the PET-102GT++ can be powered by external DC power sources. By using external DC power to compensate for power losses caused by long-haul transmission, users can continue to use the PoE extender to enlarge the distance unlimitedly. With the ability to provide 90Watts<sup>[Note3]</sup> PoE power per port, the PET-102GT++ is surely a user-friendly and high-power PoE extender.

**Note1: The equipment being powered must be fully IEEE 802.3at/802.3af compliant in order for the power supply to be able to sense the PoE devices signature and apply power. Power is supplied on Ethernet pins 1/2 (V+) and 3/6 (V-).**

# Dimension

Dimension (Unit =mm)

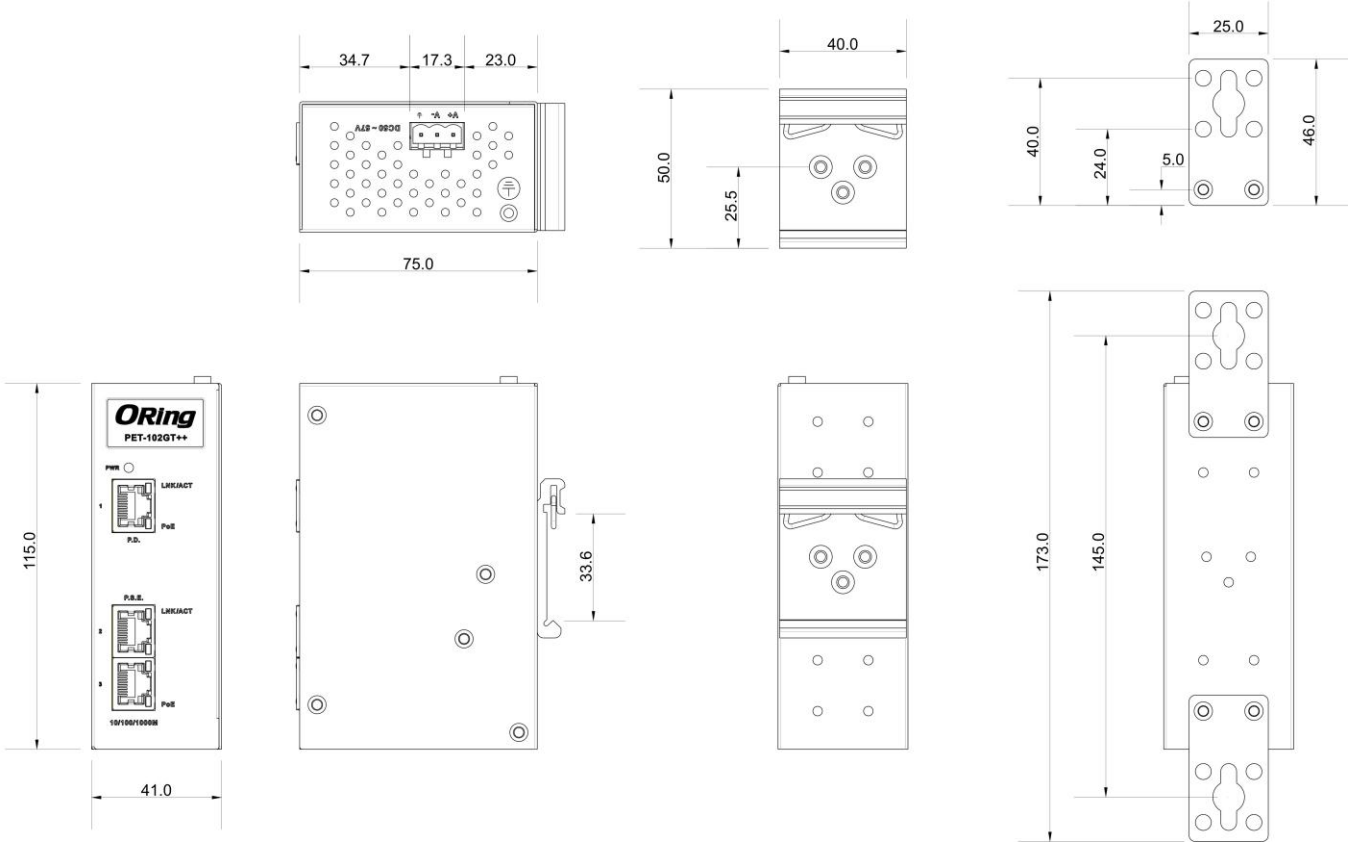

## Connector and Pin Definition

### 1000 Base-T

Pin	RJ-45 Input (Data Only)		RJ-45 Output (Data and Power)	
	Symbol	Description	Symbol	Description
1	BI_DA+	Data BI_DA+	BI_DA+ (Vdc1+)	Data BI_DA+ and Feeding Power(+)
2	BI_DA-	Data BI_DA-	BI_DA- (Vdc1+)	Data BI_DA- and Feeding Power(+)
3	BI_DB+	Data BI_DB+	BI_DB+ (Vdc1-)	Data BI_DB+ and Feeding Power(-)
4	BI_DC+	Data BI_DC+	BI_DC+ (Vdc2+)	Data BI_DC+ Feeding Power(+) <sup>[Note2]</sup>
5	BI_DC-	Data BI_DC-	BI_DC- (Vdc2+)	Data BI_DC- Feeding Power(+) <sup>[Note2]</sup>
6	BI_DB-	Data BI_DB-	BI_DB- (Vdc1-)	Data BI_DB- and Feeding Power(-)
7	BI_DD+	Data BI_DD+	BI_DD+ (Vdc2-)	Data BI_DD+ Feeding Power(-) <sup>[Note2]</sup>
8	BI_DD-	Data BI_DD-	BI_DD- (Vdc2-)	Data BI_DD- Feeding Power(-) <sup>[Note2]</sup>

### 10/100 Base-TX

Pin	RJ-45 Input (Data Only)		RJ-45 Output (Data and Power)	
	Symbol	Description	Symbol	Description
1	Rx+	Data Receive	Rx+ (Vdc1+)	Data Receive and Feeding power(+)
2	Rx-	Data Receive	Rx- (Vdc1+)	Data Receive and Feeding power(+)
3	Tx+	Data Transmit	Tx+ (Vdc1-)	Data Transmit and Feeding power(-)
4	NC	Not Connected	NC (Vdc2+)	Not Connected Feeding power(+) <sup>[Note2]</sup>
5	NC	Not Connected	NC (Vdc2+)	Not Connected Feeding power(+) <sup>[Note2]</sup>
6	Tx-	Data Transmit	Tx- (Vdc1-)	Data Transmit and Feeding power(-)
7	NC	Not Connected	NC (Vdc2-)	Not Connected Feeding power(-) <sup>[Note2]</sup>
8	NC	Not Connected	NC (Vdc2-)	Not Connected Feeding power(-) <sup>[Note2]</sup>

**Note2: Only valid for PoE++ connection**

## Specifications

ORing Injector Model	PET-102GT++
<b>Physical Ports</b>	
RJ-45 Ethernet Port with P.D. Input	1
RJ-45 Ethernet Port with P.S.E. Output	2
<b>Operating Voltage</b>	
Input Voltage	50 ~ 57 VDC
Output Power	57V / 1579mA, 90 Watts max <a href="#">[Note3]</a> per port
<b>LED Indicators</b>	
Power Indicator	DC PWR / Ready : 1 x LED Green On : Power is on and functioning Normally.
PoE P.D. Input Port Indicator	Green for Link/Act, Amber for PoE input enabled
PoE P.S.E. outputs Port Indicator	Green for Link/ACT, Amber for PoE output enabled
<b>Protection</b>	
Short Circuit Protection	Present
Over Load Protection	Present
<b>Physical Characteristic</b>	
Enclosure	IP-30
Dimension (W x D x H)	41(W) x 75 (D) x 115 (H)mm (1.61 x 2.95 x 4.52 inch)
Weight (g)	TBD
<b>Environmental</b>	
Storage Temperature	-40 to 80°C (-40 to 176°F)
Operating Temperature	-20 to 70°C (-4 to 158°F)
Operating Humidity	5% to 90% Non-condensing
<b>Regulatory Approvals</b>	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	EN60950-1 compliant
<b>Warranty</b>	5 years

**Note 3: LTPoE++™ PSE technology is applied on this product. Only when an LTPoE++™ Powered Device (PD) is attached can the PSE port deliver up to 90W of output power.**

## Ordering Information

### PET-102GT++

Available Model	Model Name	Description
	PET-102GT++	Industrial 2-port Gigabit High Power PoE++ Extender

## Packing List

- PET-102GT++ x 1
- QIG x 1
- DIN-Rail Kit x 1
- Wall-mount Kit x 1

## Optional Accessories

- DR-75-48 : 75 Watts DIN-Rail power supply
- DR-120-48 : 120 Watts DIN-Rail power supply

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9