
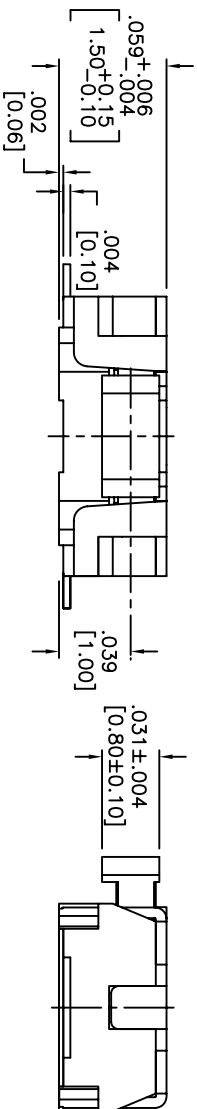


HATCHED AREA SHOWS SOLDERING LAND
P.C.B LAYOUT
UNLESS OTHER WISE SPECIFIED
ALL P.C TOLERANCES ARE ± 0.02 [0.05]

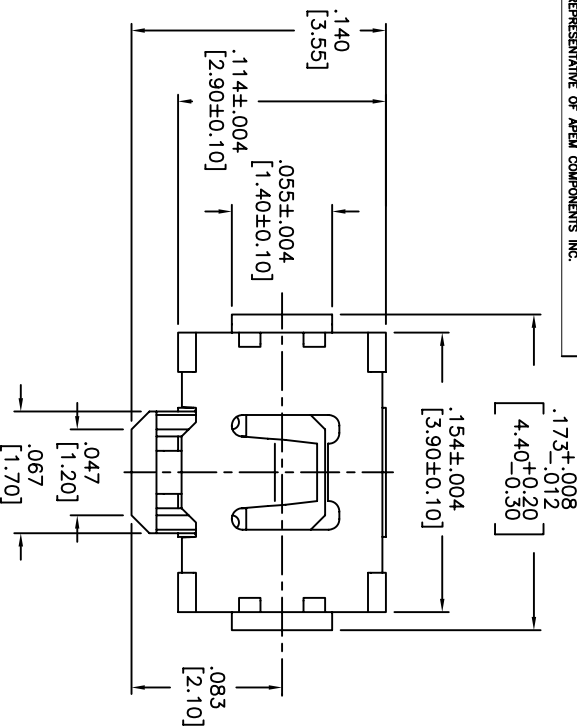

DATE	STM	REVISION RECORD	DWN.	CK.
5/08	A	ECO# 778	CD	PD

DESCRIPTION: SIDE PUSH
MECHANICAL CONTACT SWITCH.
SPECIFICATIONS:

INDICATIONS:

OPERATION FORCE: 220± 65gf

STROKE: $0.2^{+0.10}_{-0.05}$ mm

OPERATION TEMP.: -25°C TO +70°C.

STORAGE TEMP.: -30°C TO +80°C.

ELECTRICAL LIFE: 100,

RATING: 50mA, 12VDC.

CONTACT RESISTANCE: 100mΩ MAX.

INSULATION RESISTANCE: 100M Ω MIN. AT

DIELECTRIC STRENGTH: 100VAC/1 MINUTE.

CONTACT ARRANGEMENT: 1 POLE 1 THRU

VIBRATION TEST

MIL-STD-202F.

SHOCK TEST: 50G P

A OF MIL-

MATERIALS:
COVER, STAINLESS STEEL

COVER: STAINLESS STEEL
BASE: LCD HIGH TEMP. THERMOPLASTIC

BASE: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: WHITE

COLOR, WHITE.

SIEM: LCP HIGH-TEMP. THERMOPLASTIC
COLOR: BLACK

CONTACT DISK: STAIN
COLOR, BLACK.

CONIACI DISK: STAINLESS STEEL
WITH SILVER CLADDING

TERMINAL: BRASS WITH SILVER PLATING

TERMINAL: BRASS WITH SILVER
PACKAGING: TAPE AND REEL

PACKAGING: TAPE AND REEL
(3 500 PICES PER REEL)

(3,300 PEIC
BOHS COMPLIANT

LEAD FREE SOLDERING COMPATIBLE

LEAD FREE SOLDERING COMPATIBLE
HAND SOLDERING: 320°C MAX WITH 30 WATT IRON



HAND SOLDERING: 320
FOR 2 SECONDS

FOR 2 SECONDS
IR REFLOW: 260°C MAX




CUSTOMER PART NO.: 263262

2A. INSPECTED		 #3 NASH RD. NORTON, MA 01855 Tel: 978-372-1807 Fax: 978-372-3534		DRN. CJD CHK. PJD BY:	
DESIGNATES OPTICAL DIMENSION				THIRD ANGLE PROJECTION	
TOLERANCES (UNLESS OTHERWISE NOTED) .XX±.02(.01 0.5) .XXX±.008(0.20) .XXXX±.0008(0.02)		DIMENSION .INCH (MM)		SHEET 1 OF 1 SIZE B SCALE 15:1	
ANGLE = ±0.5°		TITLE			
DO NOT SCALE DRAWING		DATE		DRAWING NO. AMPFTVTR	
		7/31/06		REV. A	

THIS DOCUMENT IS THE PROPERTY OF APEM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APEM COMPONENTS INC.

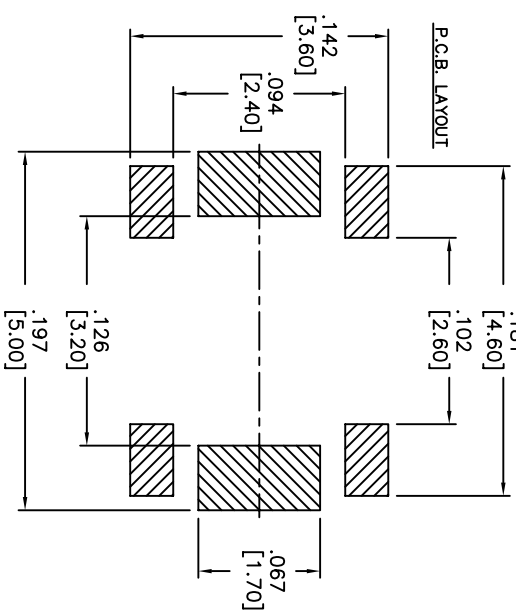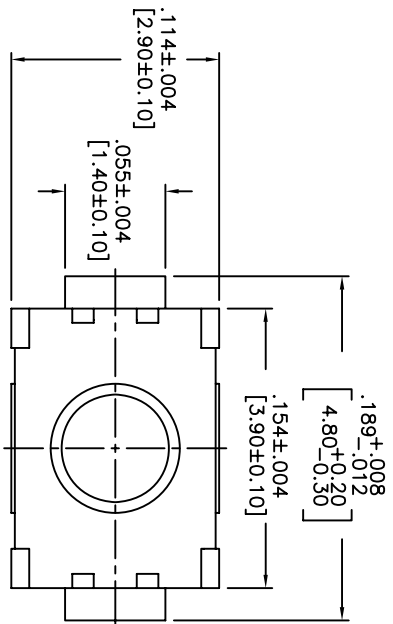

HATCHED AREA SHOWS SOLDERING LAND

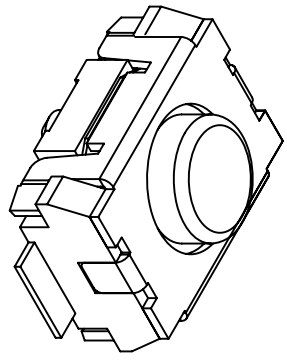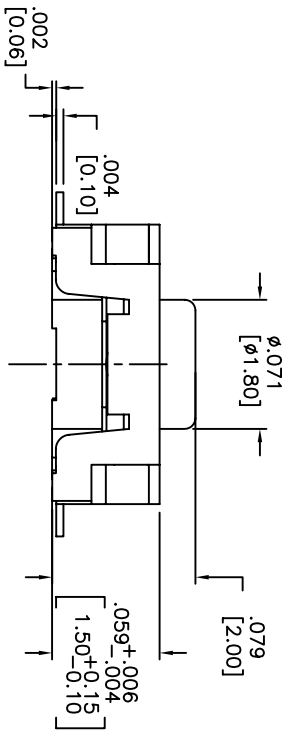

CIRCUIT




DATE	SYM	REVISION	RECORD	DWN.	CK.
5/08	B	ECO# 778		CD	PD

DESCRIPTION: VERTICAL PUSH MECHANICAL CONTACT SWITCH.
SPECIFICATIONS:
OPERATION FORCE: 160±50gf
OPERATION TEMP.: -25°C TO +70°C.
STORAGE TEMP.: -30°C TO +80°C.
ELECTRICAL LIFE: 100,000 CYCLES.
RATING: 50ma, 12VDC.
VIBRATION RESISTANCE: PASSES METHOD 201A MIL-STD-202F
SHOCK RESISTANCE: 50G PER METHOD 213B MIL-STD-202F
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.
DIELECTRIC STRENGTH: 100VAC/1 MINUTE.
CONTACT ARRANGEMENT: 1 POLE 1 THROW.
MATERIALS:
COVER: STAINLESS STEEL
BASE: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR, WHITE.
STEM: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR, BLACK
CONTACT DISK: STAINLESS STEEL WITH SILVER CLADDING
TERMINAL: BRASS WITH SILVER PLATING
TAPE: TEFLON.
TAPE & REEL PACKAGING, 2,000 PER REEL
SOLDERING: HAND SOLDERING: 30 WATT IRON AT 320°C FOR 2 SECONDS
IR REFLOW: 240°C MAX
RoHS COMPLIANT

Q.A. INSPECT:	DESIGNER'S INITIAL:	APEN	63 Neck Rd. Hopkinton, MA 01833	DRN. CJD
TOLERANCES (UNLESS OTHERWISE SPECIFIED)	INCH	SHEET	SIZE	SCALE
.XX±.XX(X)	1	OF 1	B	15:1
.XXX±.XXX(X)				
ANGLE = 30.5°				
DATE	2/4/08	DRAWING NO.	AMPTFGP2VTR	REV. B

THIS DOCUMENT IS THE PROPERTY OF APEM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APEM COMPONENTS INC.


DATE	SYM	REVISION RECORD	DWN.	CK.
01/06	A	ECO # 526	CD	PD
5/08	B	ECO# 778	CD	PD

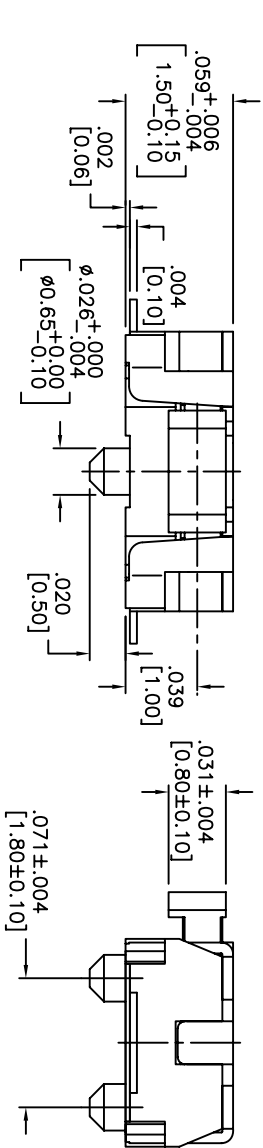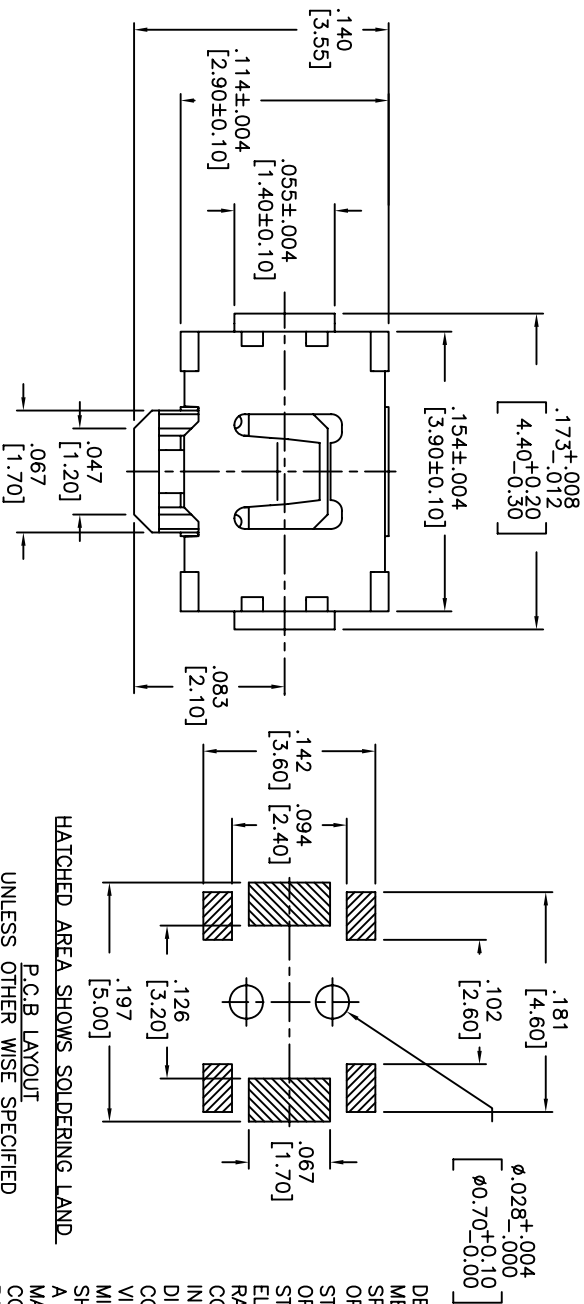




DESCRIPTION: SIDE PUSH MECHANICAL CONTACT SWITCH.
SPECIFICATIONS:
OPERATION FORCE: 220 ± 65gf
STROKE: 0.2[±]0.09mm
OPERATION TEMP.: -25°C TO +70°C.
STORAGE TEMP.: -30° TO +80°.
ELECTRICAL LIFE: 100,000 CYCLES.
RATING: 50mA, 12VDC.
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.
DIELECTRIC STRENGTH: 100VAC/1 MINUTE.
CONTACT ARRANGEMENT: 1 POLE 1 THROW.
VIBRATION TEST: PASSED METHOD 201A MIL-STD-202F.
SHOCK TEST: 50G PER METHOD 213B CONDITION A OF MIL-STD-202F
MATERIALS:
COVER: STAINLESS STEEL
BASE: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: WHITE.
STEM: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: BLACK.
CONTACT DISK: STAINLESS STEEL WITH SILVER CLADDING
TERMINAL: BRASS WITH SILVER PLATING
PACKAGING: TAPE AND REEL (3,500 PEICES PER REEL)
ROHS COMPLIANT
HAND SOLDERING: 320°C MAX WITH 30 WATT IRON FOR 2 SECONDS
IR REFLOW: 240°C MAX

Q.A. INSPECT.	DESIGNATES CRITICAL DIMENSION	TOLERANCES (UNLESS AS NOTED) XXX=±.004 [0.10] XXXX=±.008 [0.20] XXXXX=±.0008 [0.02] ANGLE = 30.5°	DATE 06/30/05	DRAWING NO. AMPTCFGVTR	REV B
APPEM APEM COMPONENTS, INC. 63 Neck Rd. Haverhill, MA 01830 Tel: 978-372-3534 Fax: 978-372-3534		P.N. CJD B.R. PD THIRD ANGLE PROJECTION			
TITLE TACT SWITCH		SHEET 1 OF 1 SIZE B SCALE 15:1 CD			

THIS DOCUMENT IS THE PROPERTY OF APDM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APDM COMPONENTS INC.

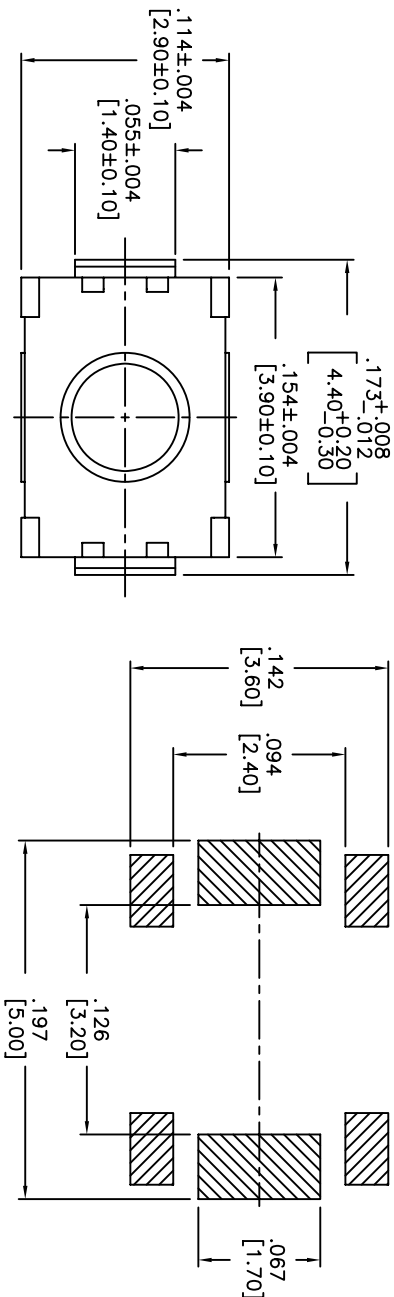

HATCHED AREA SHOWS SOLDERING LAND


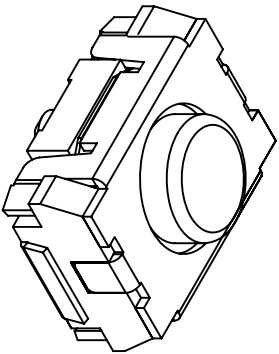
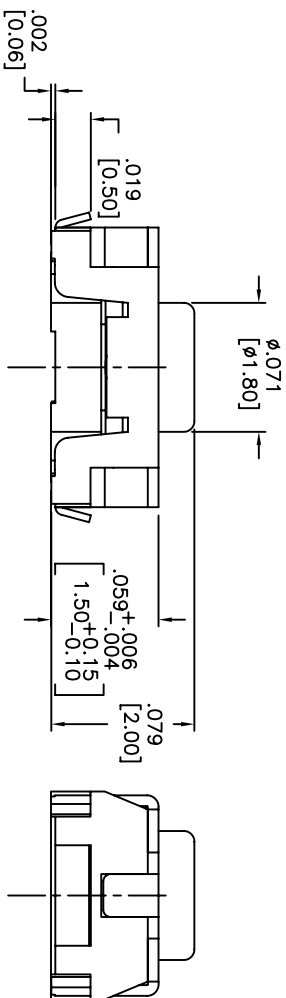


DATE	SYM	REVISION RECORD	DWN.	CK.
5/08	B	ECO# 778	CD	PD

DESCRIPTION: VERTICAL PUSH MECHANICAL CONTACT SWITCH.
SPECIFICATIONS:
OPERATION FORCE: 160± 50gf
OPERATION TEMP.: -25°C TO +70°C.
STORAGE TEMP.: -30°C TO +80°C.
ELECTRICAL LIFE: 100,000 CYCLES.
RATING: 50mA, 12VDC.
VIBRATION RESISTANCE: PASSES METHOD 201A
MIL-STD-202F
SHOCK RESISTANCE: 50G PER METHOD 213B
MIL-STD-202F
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.
DIELECTRIC STRENGTH: 100VAC/1 MINUTE.
CONTACT ARRANGEMENT: 1 POLE 1 THROW.
MATERIALS:
COVER: STAINLESS STEEL
BASE: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: WHITE.
STEM: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: BLACK.
CONTACT DISK: STAINLESS STEEL
WITH SILVER CLADDING
TERMINAL: BRASS WITH SILVER PLATING
TAPE: TEFLON.
TAPE & REEL PACKAGING, 2,000 PER REEL
SOLDERING:
HAND SOLDERING: 30 WATT IRON AT 320°C FOR 2 SECONDS
IR REFLOW: 240°C MAX
RoHS COMPLIANT

Q.A. INSECT.	63	NO. 01835	PER. CJD
DESIGNATES CRITICAL	APDM	APDM	BR. PJD
TOLERANCES (UNLESS OTHERWISE SPECIFIED)	INCH	SHEET	SCALE
.XX=±.02(0.5)	1	OF 1	15:1
.XXX=±.008(0.20)	B		
.XXXX=±.0008(0.02)			
ANGLE = ±0.5°			
DO NOT SCALE	DATE	DRAWING NO.	REV.
DRAWING	2/4/08	AMPTLGP2VTR	B

THIS DOCUMENT IS THE PROPERTY OF APEM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APEM COMPONENTS INC.

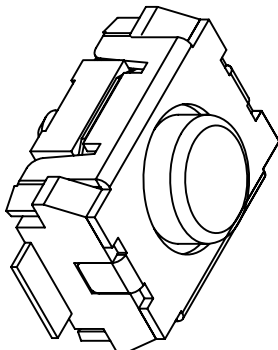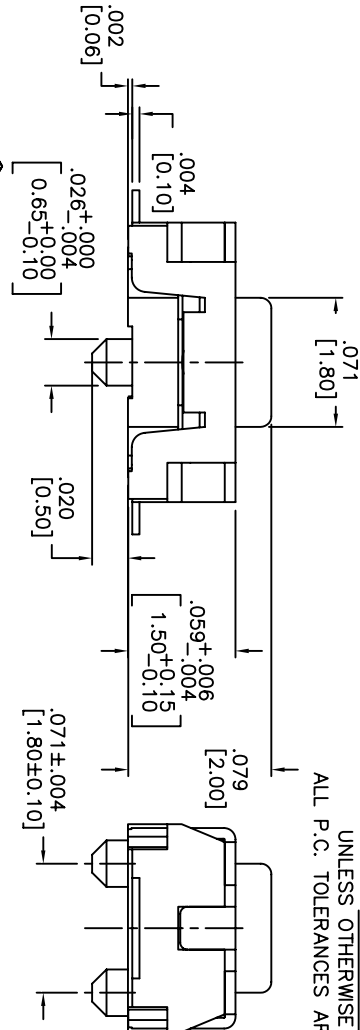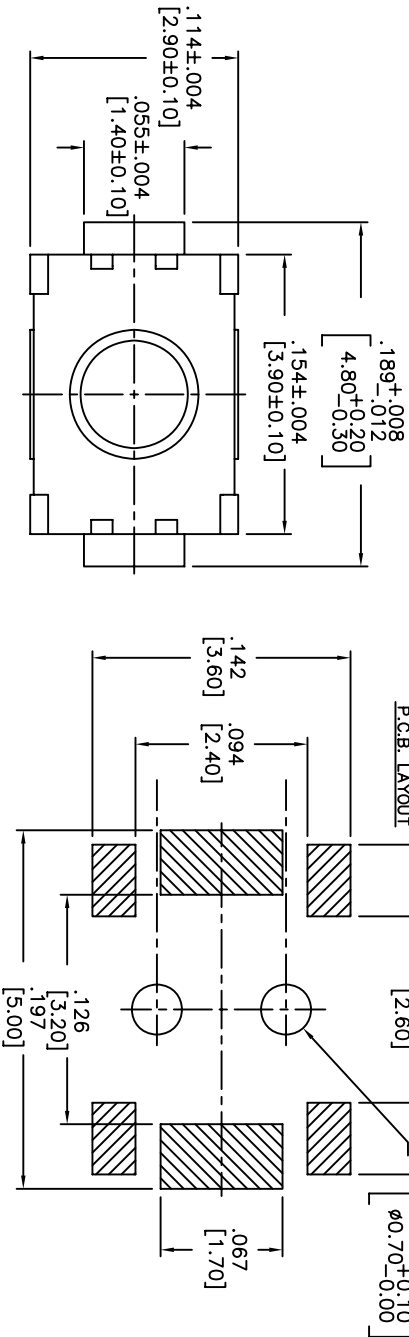

CIRCUIT

DATE	SYM	REVISION RECORD	DWN.	CK.
5/08	B	ECO# 778	CD	PD

DESCRIPTION: VERTICAL PUSH MECHANICAL CONTACT SWITCH.

SPECIFICATIONS:

OPERATION FORCE: 160 $\pm$ 50gf

OPERATION TEMP.: -25°C TO +70°C.

STORAGE TEMP.: -30°C TO +80°C.

ELECTRICAL LIFE: 200,000 CYCLES.

RATING: 50ma, 12VDC.

VIBRATION RESISTANCE: PASSES METHOD 201A

MIL-STD-202F

SHOCK RESISTANCE: 50G PER METHOD 213B

MIL-STD-202F

CONTACT RESISTANCE: 100m Ω MAX.

INSULATION RESISTANCE: 100M Ω MIN. AT 100VDC.

DIELECTRIC STRENGTH: 100VAC/1 MINUTE.

CONTACT ARRANGEMENT: 1 POLE 1 THROW.

TRAVEL: .005 $\pm$.002 [0.13 $\pm$ 0.05]

MATERIALS:

COVER: STAINLESS STEEL

BASE: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, WHITE.

STEM: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, BLACK.

CONTACT DISK: STAINLESS STEEL

WITH SILVER CLADDING

TERMINAL: BRASS WITH SILVER PLATING

TAPE: TEFLON.

TAPE & REEL PACKAGING, 2,000 PER REEL

SOLDERING:

HAND SOLDERING: 30 WATT IRON AT 320°C FOR 2 SECONDS

IR REFLOW: 240°C MAX


RoHS COMPLIANT

Q.A. INSPECT.	DESIGNATES CRITICAL DIMENSION	TOLERANCES (UNLESS AS NOTED)	ANGLE = 40.5°
INCH	SHEET 1 OF 1	SIZE B	SCALE 15:1
TITLE TACT SWITCH		THIRD ANGLE PROJECTION	
DATE 6/30/05	DRAWING NO. AMPTCFGP2VTR	REV B	

THIS DOCUMENT IS THE PROPERTY OF APEM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APEM COMPONENTS INC.


DATE	SYM	REVISION RECORD	DWN.	CK.
5/08	B	ECO# 778	CD	PD

HATCHED AREA SHOWS SOLDERING LAND
P.C.B LAYOUT
UNLESS OTHER WISE SPECIFIED
ALL P.C TOLERANCES ARE ±.002 [0.05]

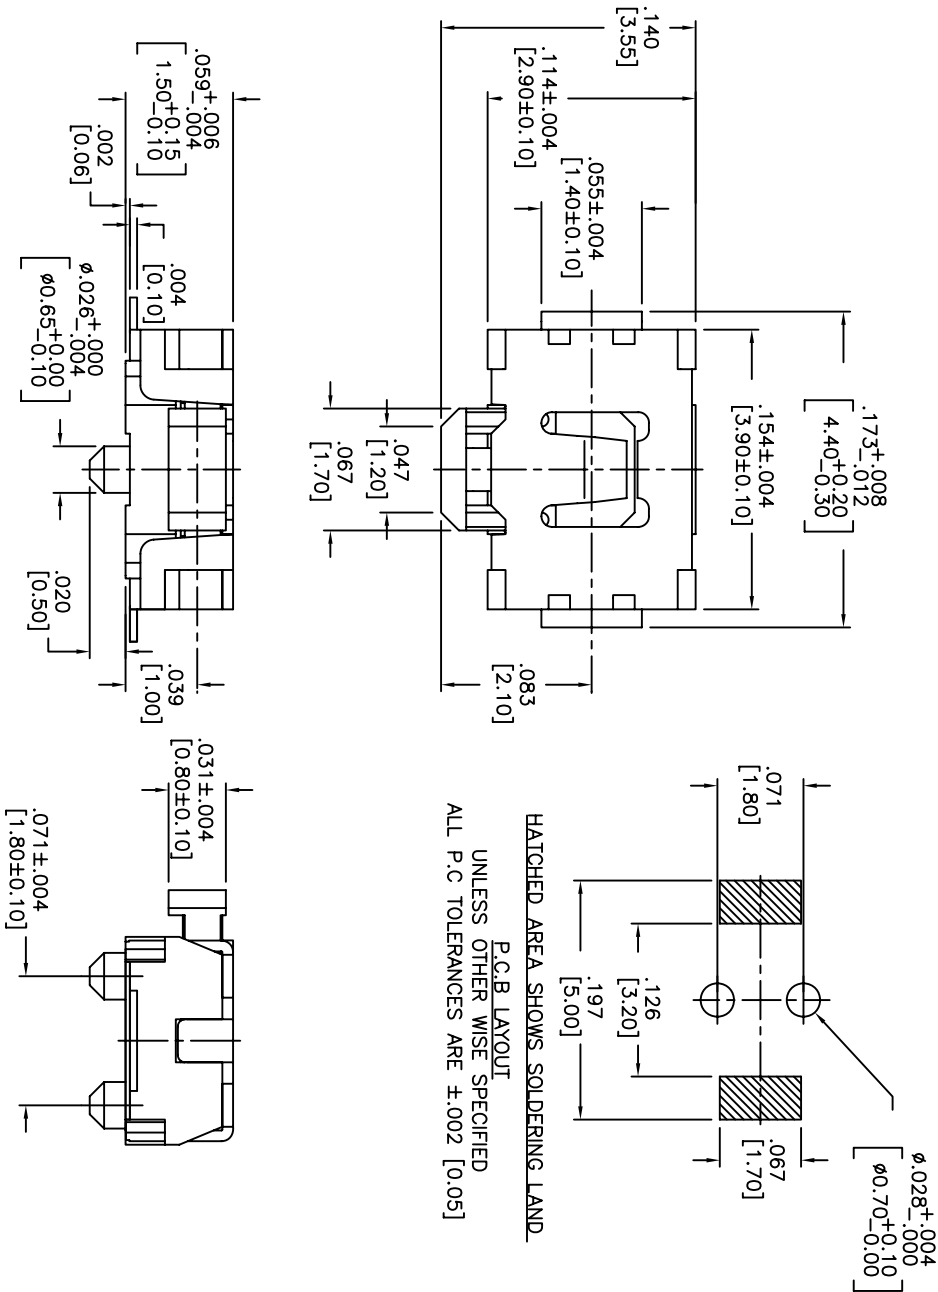







DESCRIPTION: SIDE PUSH
MECHANICAL CONTACT SWITCH.
SPECIFICATIONS:
OPERATION FORCE: 220± 65gf
STROKE: 0.2±0.08mm
OPERATION TEMP.: -25°C TO +70°C.
STORAGE TEMP.: -30°C TO +80°C.
ELECTRICAL LIFE: 100,000 CYCLES.
RATING: 50mA, 12VDC.
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.
DIELECTRIC STRENGTH: 100VAC/1 MINUTE.
CONTACT ARRANGEMENT: 1 POLE 1 THROW.
VIBRATION TEST: PASSED METHOD 201A
MIL-STD-202F.
SHOCK TEST: 50G PER METHOD 213B CONDITION A OF MIL-STD-202F
MATERIALS:
COVER: STAINLESS STEEL
BASE: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR, WHITE.
STEM: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR, BLACK.
CONTACT DISK: STAINLESS STEEL
WITH SILVER CLADDING
TERMINAL: BRASS WITH SILVER PLATING
PACKAGING: TAPE AND REEL
(3,500 PEICES PER REEL)
ROHS COMPLIANT
LEAD FREE SOLDERING COMPATIBLE
HAND SOLDERING: 320°C MAX WITH 30 WATT IRON
FOR 2 SECONDS
IR REFLOW: 260°C MAX

Q.A. INSPECT.	DESIGNATES CRITICAL DIMENSION	TOLERANCES (UNLESS AS NOTED) XXX=±.004[0.10] XXXX=±.008[0.20] XXXXX=±.0008[0.02] ANGLE = 30.5°	INCH SHEET 1 OF 1	SIZE B	SCALE 15:1	THIRD ANGLE PROJECTION	DATE 5/2/06	DRAWING NO. AMPTCFVTR	REV B
 APEM Haverhill, MA 01830 Tel: 978-372-3534 Fax: 978-372-3534			63 Neck Rd. Haverhill, MA 01830 Tel: 978-372-3534 Fax: 978-372-3534			DRN. CJD BRK. PJD			



THIS DOCUMENT IS THE PROPERTY OF APM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APM COMPONENTS INC.

DATE	SYM	REVISION RECORD	DWN.	CK.
1/06	B	ECO# 526	CD	PD
5/06	C	ECO# 778	CD	PD

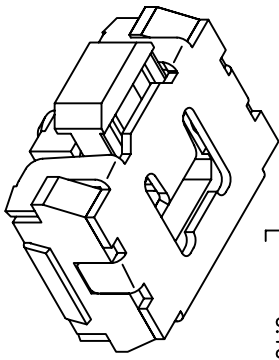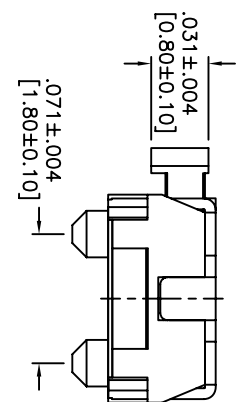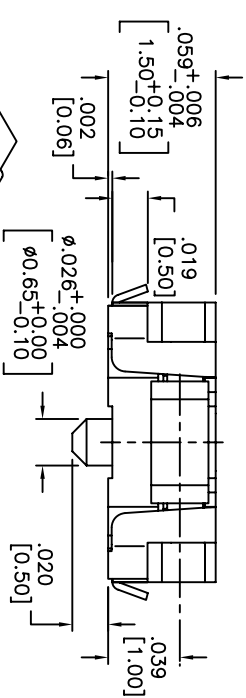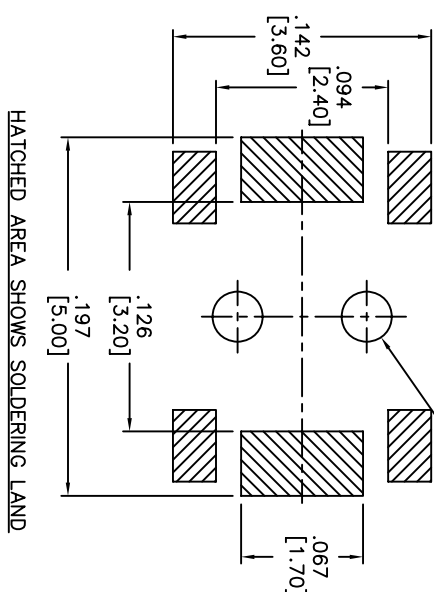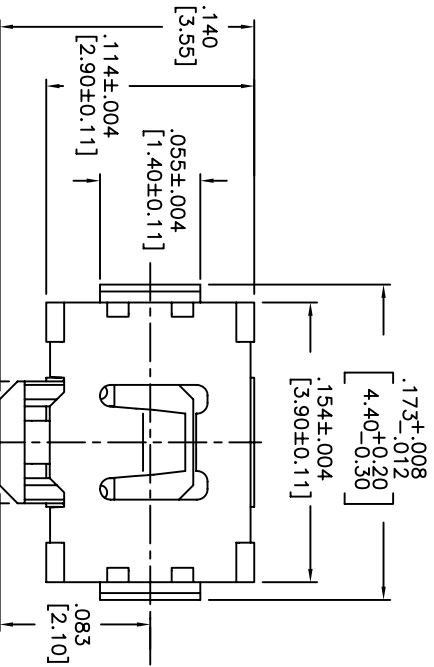

DESCRIPTION: SIDE PUSH MECHANICAL CONTACT SWITCH, WITH BENDING AND GROUNDING TERMINALS.

SPECIFICATIONS:

OPERATION FORCE: 220± 65gf

OPERATION TEMP.: -25°C TO +70°C.

STORAGE TEMP.: -30°C TO +80°C.

ELECTRICAL LIFE: 100,000 CYCLES.

RATING: 50mA, 12VDC.

VIBRATION RESISTANCE: PASSES METHOD 201A MIL-STD-202F

SHOCK RESISTANCE: 50G PER METHOD 213B MIL-STD-202F

CONTACT RESISTANCE: 100mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.

DIELECTRIC STRENGTH: 100VAC/1 MINUTE.

CONTACT ARRANGEMENT: 1 POLE 1 THROW.

STROKE: .008 ±.004 [0.2 ±0.05]

MATERIALS:

COVER: STAINLESS STEEL

BASE: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR: WHITE.

STEM: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR: BLACK.

CONTACT DISK: STAINLESS STEEL

WITH SILVER CLADDING

TERMINAL: BRASS WITH SILVER PLATING

TAPE: TEFLON, 3500 PER REEL



HAND SOLDERING: 30 WATT IRON AT 320°C FOR 2 SECONDS

IR REFLOW: 240°C MAX

RoHS COMPLIANT

Q.A. INSPECT:	DESIGNATES CRITICAL DIMENSION	TOLERANCES (UNLESS AS NOTED)	ANGLE = 40.5°
INCH	SHEET 1 OF 1	SIZE B	SCALE 15:1
TITLE	TACT SWITCH		
DATE	06/30/05	DRAWING NO.	AMPTCLGVTR
REV	C		

THIS DOCUMENT IS THE PROPERTY OF APDM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APDM COMPONENTS INC.

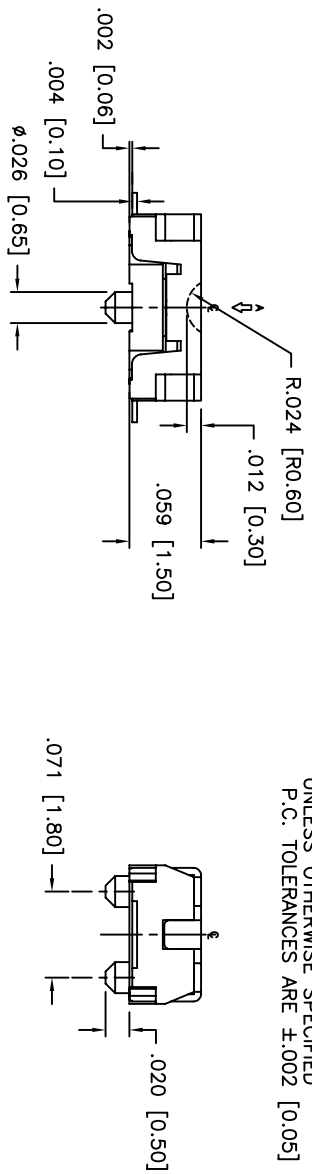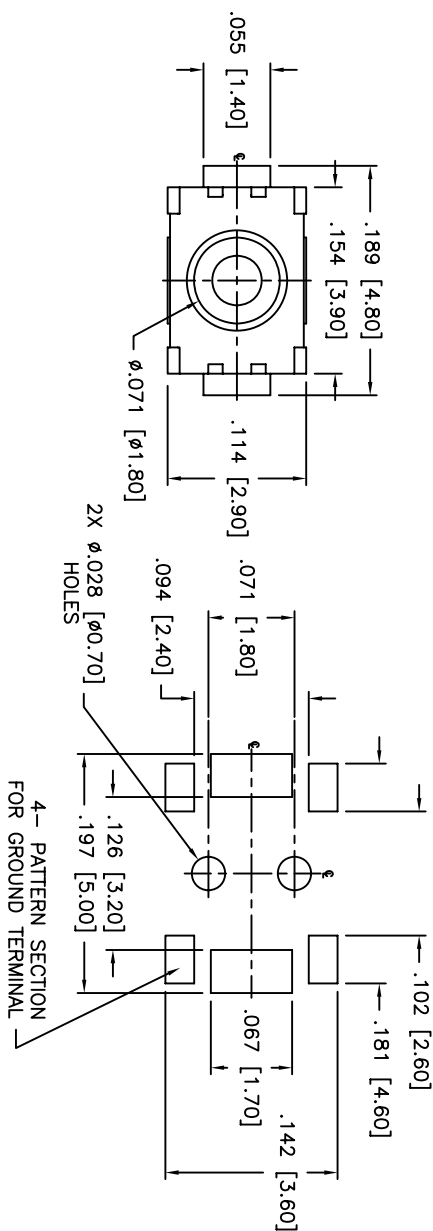

DATE	SYM	REVISION RECORD	DWN.	CK.
1/06	A	ECO # 526	CD	PD
5/06	B	ECO# 778	CD	PD

DESCRIPTION: SPST, NORMALLY OPEN, MOMENTARY, SURFACE MOUNT TACT SWITCH WITH LOCATING PINS

SPECIFICATIONS:

CONTACT RATING: 50mA @ 12VDC

INITIAL CONTACT RESISTANCE: 100MOHMS MAX.

INSULATION RESISTANCE: 100MOHMS MIN. @ 500VDC

DIELECTRIC STRENGTH: 100VAC FOR 1 MINUTE

ELECTRICAL LIFE: 200,000 CYCLES MIN.

OPERATING TEMPERATURE RANGE: -25°C to +70°C

STOP STRENGTH: MAX 3kgf VERTICAL STATIC LOAD

CONT. FOR 15 SEC.

ACTUATION FORCE: 160± 50gf

STORAGE TEMPERATURE RANGE: -30°C TO +80°C

SHOCK RESISTANCE: 50G PER METHOD 213B, MIL-STD-202F

VIBRATION RESISTANCE: PASSES METHOD 201A, MIL-STD-202F

SOLDERING:

IR REFLOW: 240°C MAX.

HAND SOLDERING: 350°C MAX. FOR 3 SECONDS MAX. (30 WATT IRON MAX.)

MATERIALS:

BASE: LCP HIGH-TEMP THERMOPLASTIC UL94V-0

ACTUATOR: LCP HIGH-TEMP THERMOPLASTIC UL94V-0

COVER: STAINLESS STEEL

TERMINALS: SILVER PLATED BRASS

SHORTING CONTACT: STAINLESS STEEL WITH SILVER CLADDING

TAPE: TEFLON

RoHS COMPLIANT


NOTE:

1. AFTER SOLDERING, RETURN SWITCHES TO NORMAL TEMPERATURE BEFORE WASHING.

Q.A. INSPECT.	DESIGNER'S INITIAL	DATE	DRAWING NO.	REV.
APDM	63 Neck Rd. 01835 Haverhill, MA 01835 Tel: 978-372-3534 Fax: 978-372-3534	07/20/05	AMPTCFG1VTR	B
TOLERANCES (UNLESS OTHERWISE SPECIFIED)	SHEET 1 OF 1	SIZE B	SCALE 10:1	THIRD ANGLE PROJECTION
.X0 = ±.02 [0.5] .X00 = ±.008 [0.20] .X000 = ±.0008 [0.02] ANGLE = ±0.5°	TITLE TACT SWITCH WITH LOCATING PINS			

THIS DOCUMENT IS THE PROPERTY OF APDM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APDM COMPONENTS INC.

P.C.B. LAYOUT

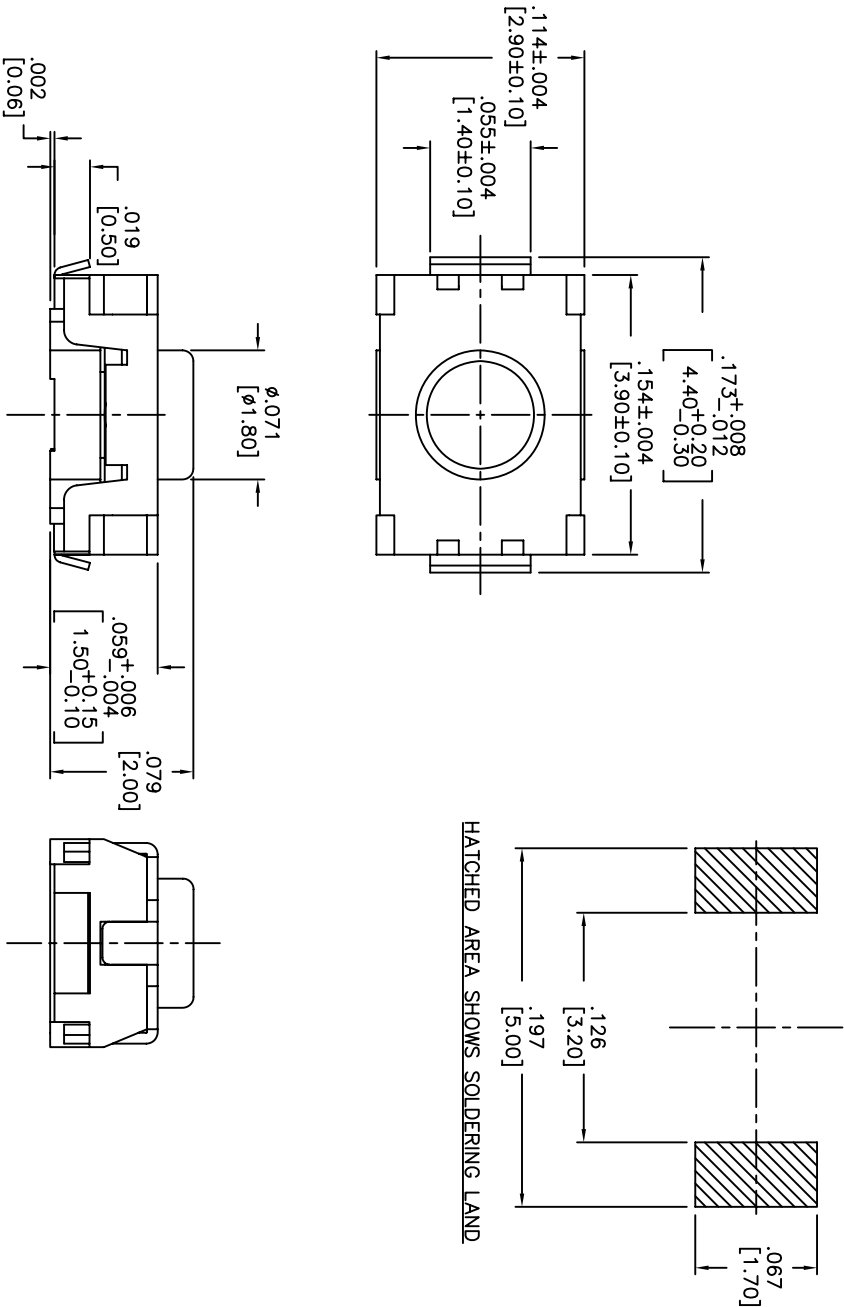

DATE	SYM	REVISION RECORD	DWN.	CK.
1/06	A	ECO# 526	CD	PD
5/06	B	ECO# 778	CD	PD

DESCRIPTION: VERTICAL PUSH MECHANICAL CONTACT SWITCH.

SPECIFICATIONS:

OPERATION FORCE: 220± 65gf

OPERATION TEMP.: -25°C TO +70°C.

STORAGE TEMP.: -30°C TO +80°C.

ELECTRICAL LIFE: 200,000 CYCLES.

RATING: 50mA, 12VDC.

VIBRATION RESISTANCE: PASSES METHOD 201A

MIL-STD-202F

SHOCK RESISTANCE: 50G PER METHOD 213B

MIL-STD-202F

CONTACT RESISTANCE: 100mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.

DIELECTRIC STRENGTH: 100VAC/1 MINUTE.

CONTACT ARRANGEMENT: 1 POLE 1 THROW.

MATERIALS:

COVER: STAINLESS STEEL

BASE: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, WHITE.

STEM: LCP HIGH-TEMP. THERMOPLASTIC.

COLOR, BLACK.

CONTACT DISK: STAINLESS STEEL

WITH SILVER CLADDING

TERMINAL: BRASS WITH SILVER PLATING

TAPE: TEFLON.

TAPE & REEL PACKAGING, 2,000 PER REEL

SOLDERING:


HAND SOLDERING: 30 WATT IRON AT 320°C FOR

2 SECONDS

IR REFLOW: 240°C MAX

RoHS COMPLIANT


LEAD FREE PROCESS COMPATIBLE



CIRCUIT

Q.A. INSPECT.	DESIGNATES CRITICAL DIMENSION	APDM	63 Neck Rd. Haverhill, MA 01830	DRN. CJD
TOLERANCES (UNLESS OTHERWISE SPECIFIED)				
.XX±.XX[0.5]				
.XXX±.XXX[0.20]				
.XXXX±.XXXX[0.02]				
ANGLE = 10.5°				
DO NOT SCALE DRAWING				
DATE	01/23/06	DRAWING NO.	AMPTLP2VTR	REV. B

P.C.B. LAYOUT

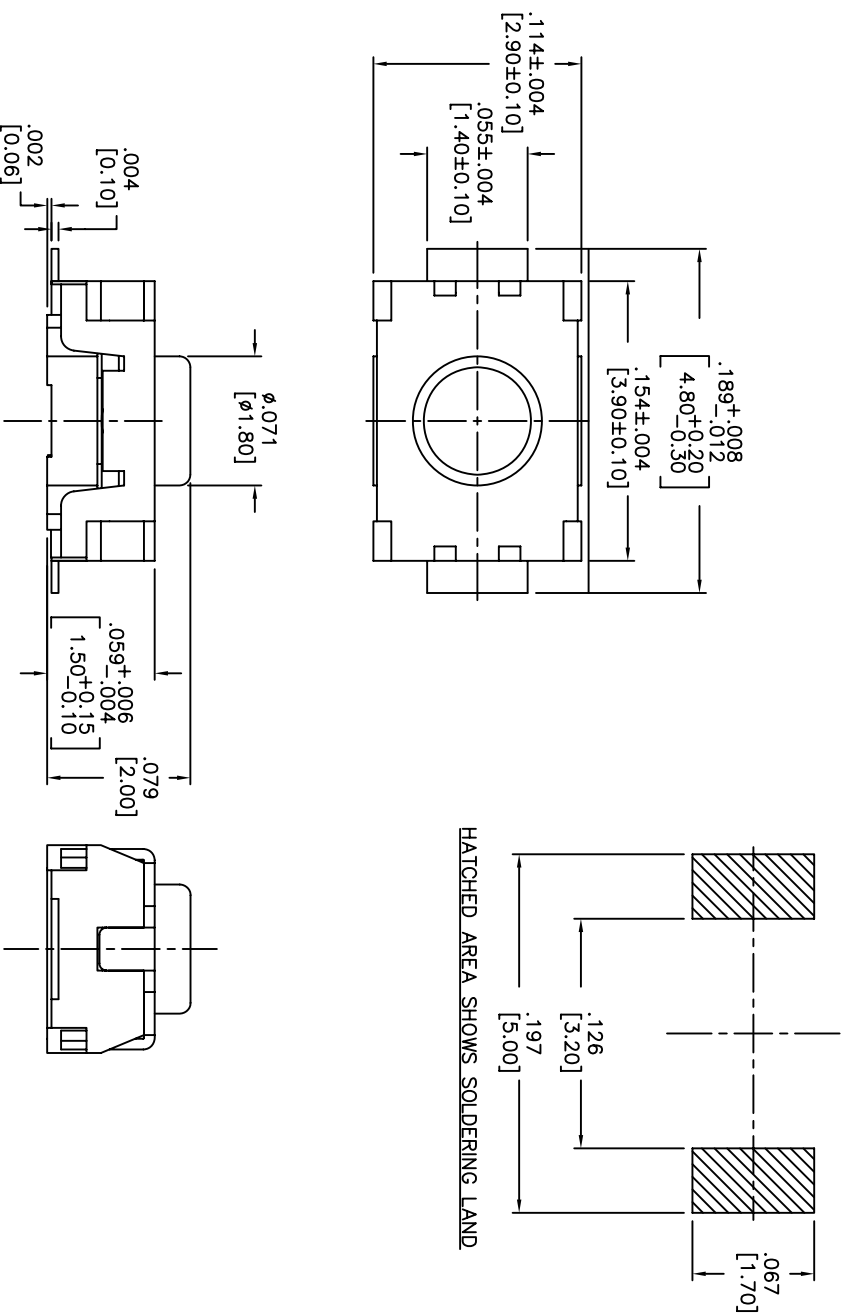

DESCRIPTION: VERTICAL PUSH MECHANICAL CONTACT SWITCH.

SPECIFICATIONS:

OPERATION FORCE: 160± 50gf

OPERATION TEMP.: -25°C TO +70°C.

STORAGE TEMP.: -30°C TO +80°C.

ELECTRICAL LIFE: 200,000 CYCLES.

RAILING: 50mA, 12VDC;
VIBRATION RESISTANCE

VIBRATION RESISTANCE: PASSES METHOD 201A
MIL-STD-202FMILE-31D-2021
SHOCK RESISTANCE: 50G PER METHOD 213B

MIL-STD-202F

CONTACT RESISTANCE: 100mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN. AT 100VDC.

DIELECTRIC STRENGTH: 100VAC/1 MINUTE.

CONTACT ARRANGEMENT: 1 POLE 1 THROW.

MATERIALS:

COVER: STAINLESS STEEL

BASE: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR: WHITE

COLOR, WHITE.

31EML:ECF HIGH-1EMLF: 1HERMOL-EAS1IC:
COLOR BLACK

CONTACT DISK: STAINLESS STEEL

CONTRACT DESIGN: COMBINED OFFER
WITH SILVER CLADDING

TERMINAL: BRASS WITH SILVER PLATING

TAPE: TEFLON.

TAPE & REEL PACKAGING, 2,000 PER REEL

SOLDERING: _____

HAND SOLDERING: 30 WATT IRON AT 320°C FOR 5 SECONDS

2 SECONDS
IB REEL OW. 200°C MAX

IR REFLOW: 260
POHS COMPLIANT

LEAD FREE PROCESS COMPATIBLE



DATE	SYM	REVISION RECORD	DWN.	CK.
5/08	B	ECO# 778	CD	PD

Q.A. INSPECT.	 Q.S. NAME, RD. 01355 14197B-772-1802 Fox/B-572-5534		DRN Bt:	CJD
DEPARTS CRITICAL DIMENSION Δ	TO FINANCES (EXCEPT AS NOTED) JXX-±.02[.5] JXX-±.008[.0.20] JXX-±.0008[.0.02] ANGLE = ±0.5°		CHK. Bt: PJD	
DO NOT SCALE DRAWING	DATE	DRAWING NO.	REV	
01/23/06	AMPTFP2VTR	B	B	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9