



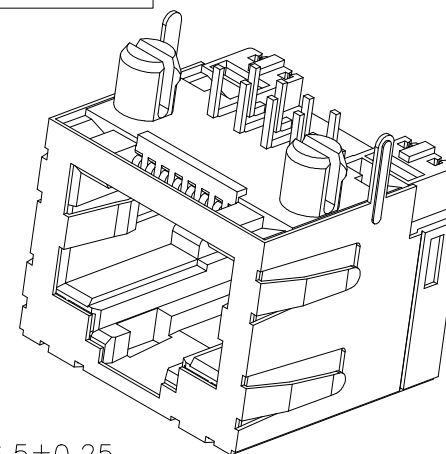


4. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

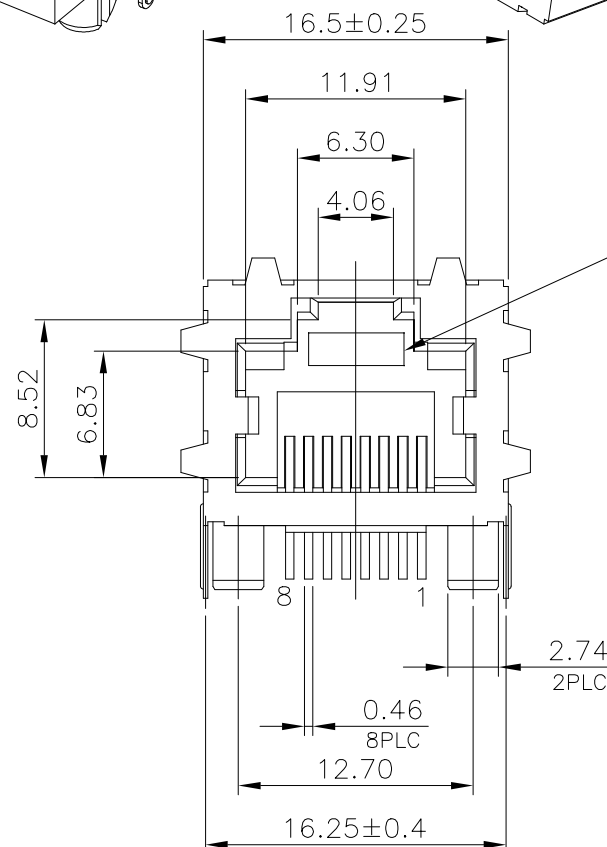

Feature	Value
1	1.02
2	7.14
3	1.78
4	2.54
5	3.43
6	12.70
7	16.26

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS:1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

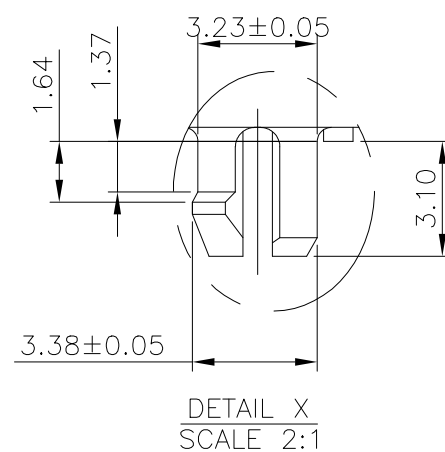

OBSOLETE 	1.27um[50u"]	1775134-4
	0.76um[30u"]	1775134-3
	0.38um[15u"]	1775134-2
	0.15um[6u"]	1775134-1
	MIN. GOLD THICKNESS	PART NUMBER

CUSTOMER DRAWING

	ANGLES
	FINISH

SEE NOTE

SEE NOTE

CUSTOMER DRAWING



TE Connectivity

7	NAME	MODULAR JACK, RJ45, SINGLE
---	------	----------------------------

SCALE	1:1	SHEET	1 OF 4	REV	B
-------	-----	-------	--------	-----	---

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.



COPYRIGHT -- By --

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

NOTE:

1. MATERIAL:

1.1 HOUSING: PA46, WITH 30% GF, UL94V-0, BLACK COLOR.

1.2 CONTACTS: PHOSPHOR BRONZE.



1.3 SHELL: BRASS.

2. FINISH:

2.1 CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
GOLD FLASH ON SOLDER TAIL,
1.27um [50u"] MIN. NICKEL UNDERPLATED OVERALL.


2.2 SHELL: 0.508um [20u"] MIN. NICKEL PLATED.

3. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.

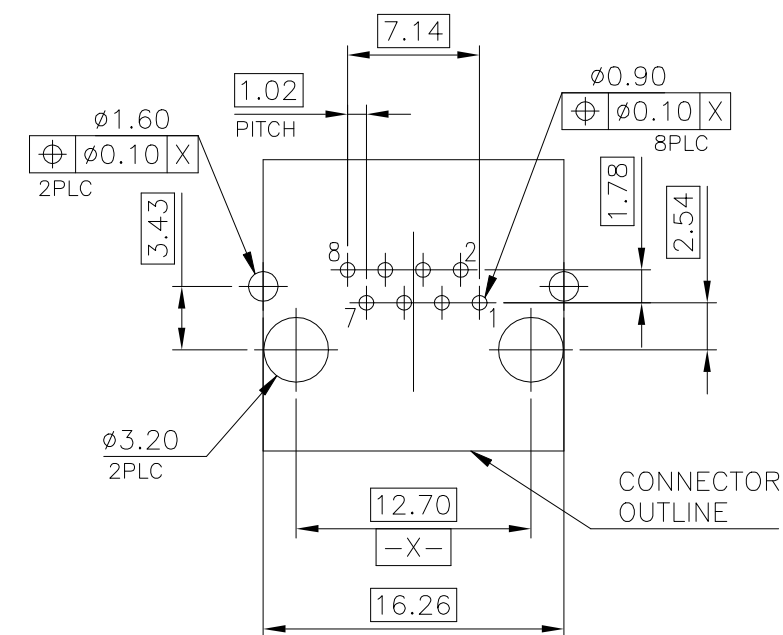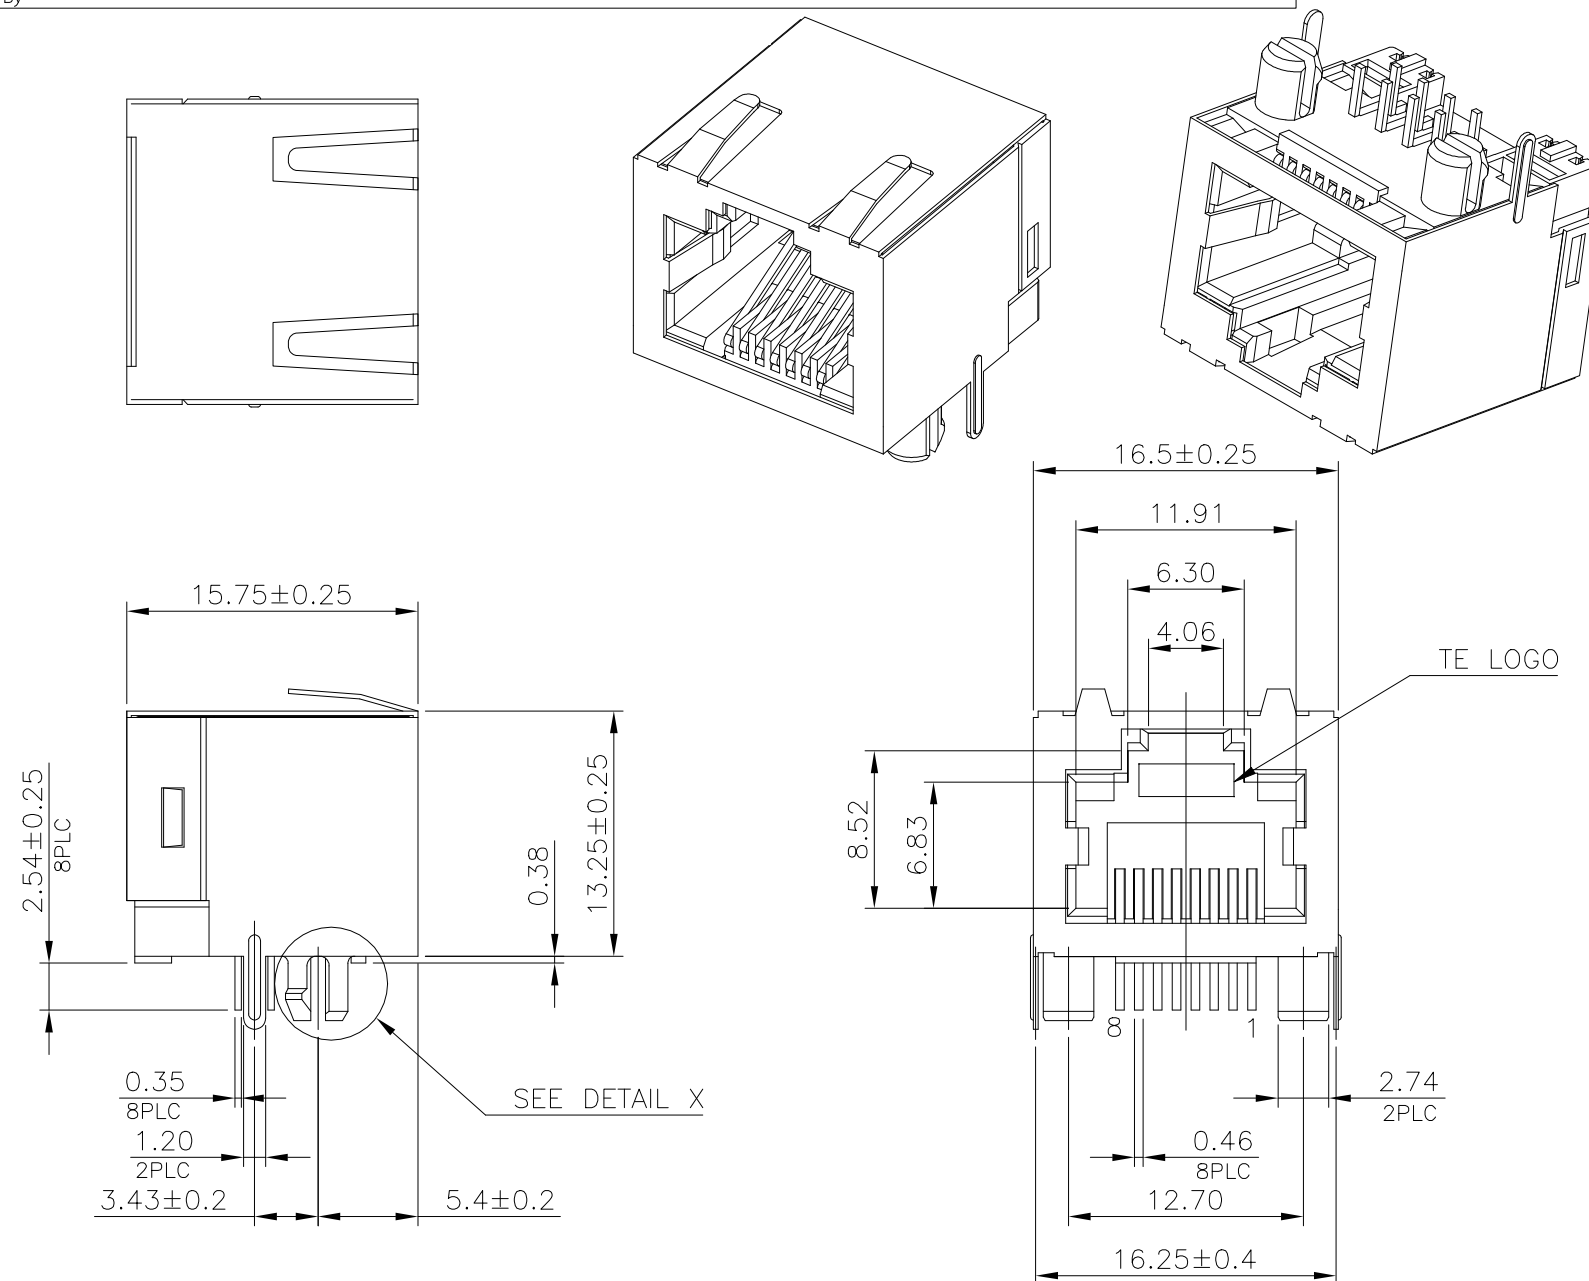

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

OBSOLETE A	1.27um[50u"]	1-1775134-4
	0.76um[30u"]	1-1775134-3
	0.38um[15u"]	1-1775134-2
	0.15um[6u"]	1-1775134-1
	MIN. GOLD THICKNESS	PART NUMBER

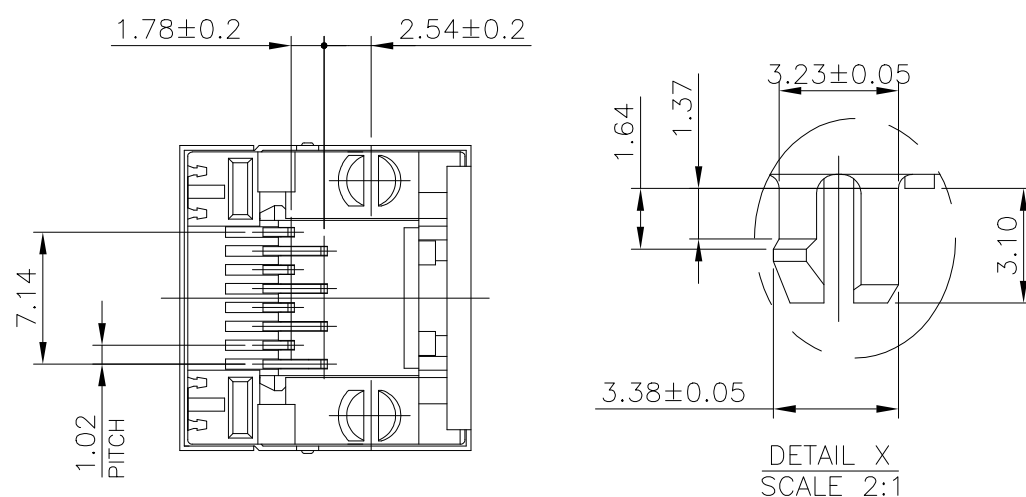

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	O. HU	220CT2007	TE Connectivity			
		CHK	S. HOU	220CT2007				
		APVD	W.J. KE	220CT2007	NAME			
		PRODUCT SPEC			MODULAR JACK, RJ45, SINGLE			
		APPLICATION SPEC			—			
		—			—			
		WEIGHT			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		—			A3	00779	C-1775134	—
		CUSTOMER DRAWING			SCALE	1:1	SHEET	2 of 4
					REV B			

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- . - .

REVISIONS



COPYRIGHT - By -

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

NOTE:

1. MATERIAL:

1.1 HOUSING: PA46, WITH 30% GF, UL94V-0, BLACK COLOR.

1.2 CONTACTS: PHOSPHOR BRONZE.

1.3 LED SOLDER TAIL: EPOXY, STEEL.

2. FINISH:

2.1 CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
GOLD FLASH ON SOLDER TAIL,
1.27um [50u"] MIN. NICKEL UNDERPLATED OVERALL.








2.2 LED: 1.016um [40u"] COPPER UNDERPLATED OVERALL.

1.27um [50u"] NICKEL OVERALL.

1.27um [50u"] SILVER ON BONDING AREA.

2.032um [80u"] BRIGHT-TIN ON SOLDER AREA.

3. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.

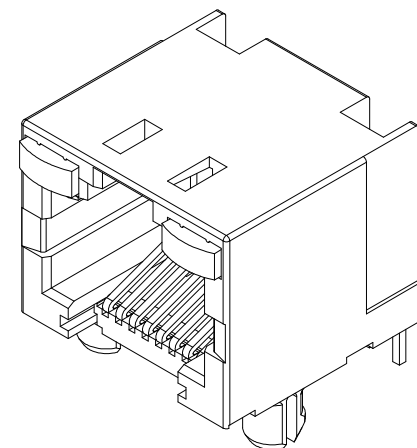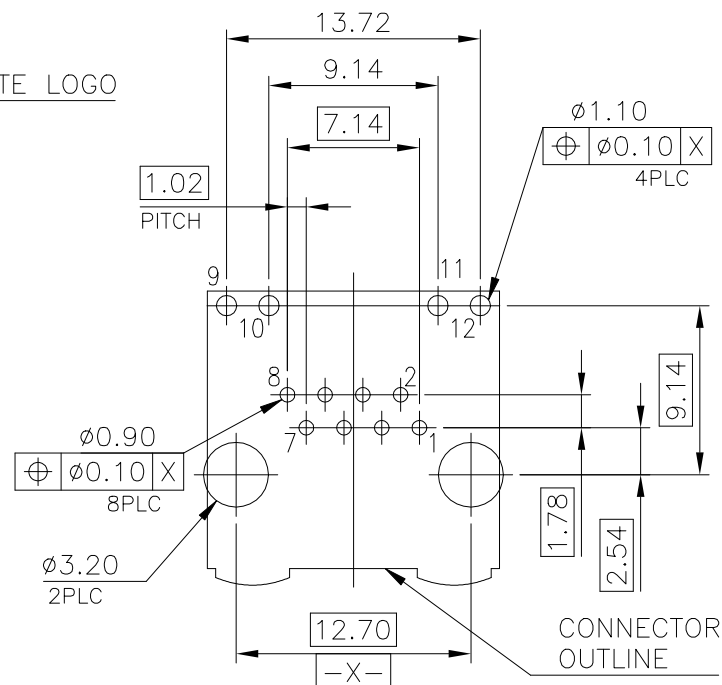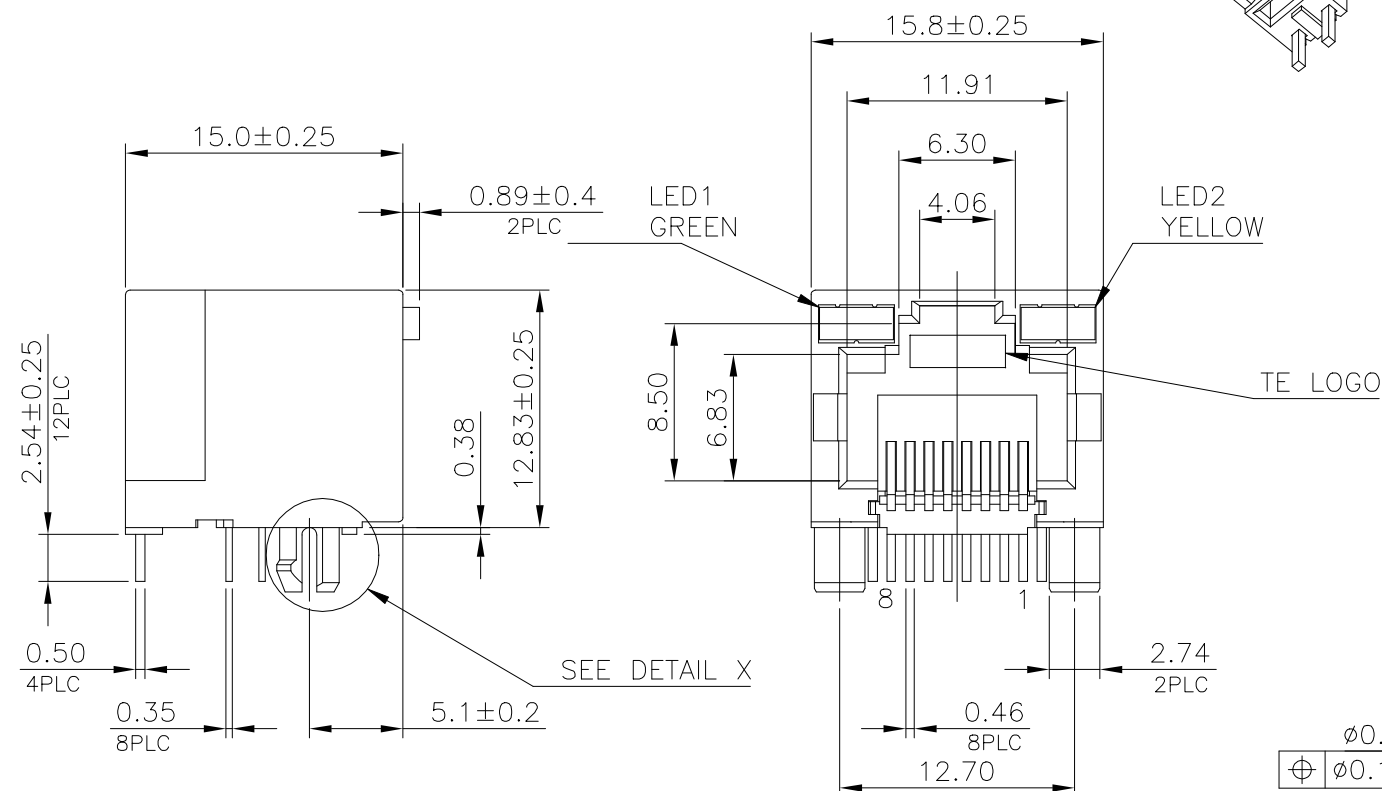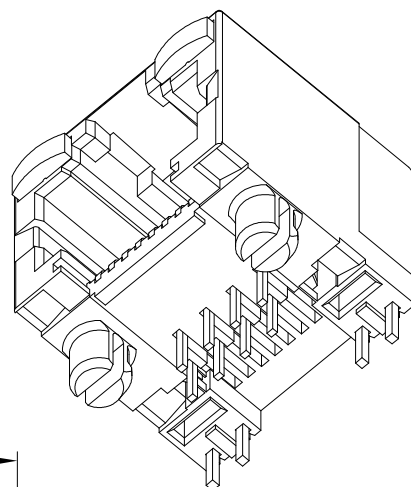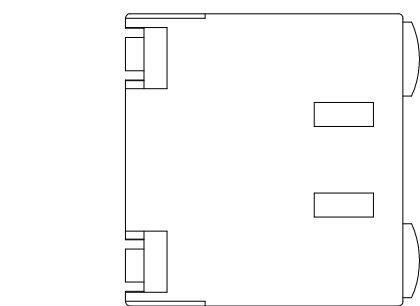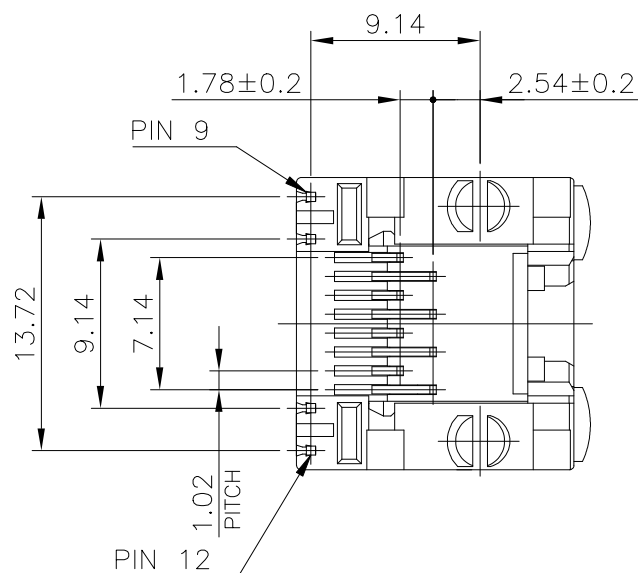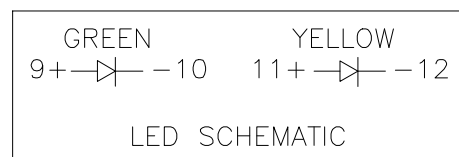RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05 (TOP VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	O. HU	22OCT2007	TE Connectivity			
		CHK	S. HOU	22OCT2007				
		APVD	W.J. KE	22OCT2007	NAME			
		PRODUCT SPEC			MODULAR JACK, RJ45, SINGLE			
		APPLICATION SPEC			-			
		-			-			
		-			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT			A3	00779	C=1775134	-
		CUSTOMER DRAWING			SCALE	1:1	SHEET	3 of 4
					REV B			

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .



© COPYRIGHT - By -

ALL RIGHTS RESERVED.


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

- NOTES:
- 1. MATERIAL:
TRAY: PVC.
CARTON: CORRUGATED FIBER.
BOX: CORRUGATED FIBER.
 - 2. DIMENSION: SEE DRAWING
 - 3. QUANTITY: SEE TABLE
 - 4. WEIGHT: SEE TABLE

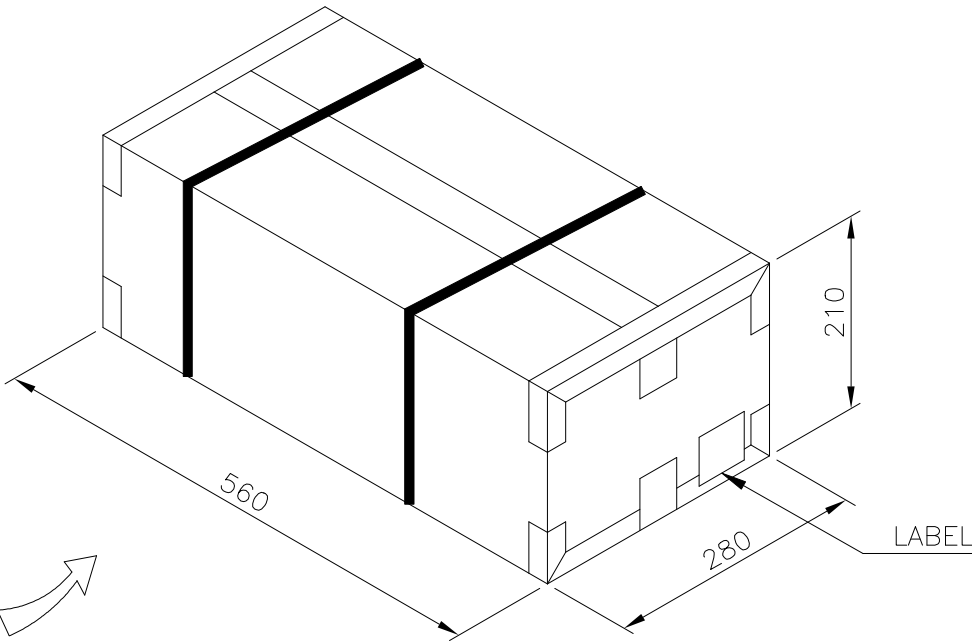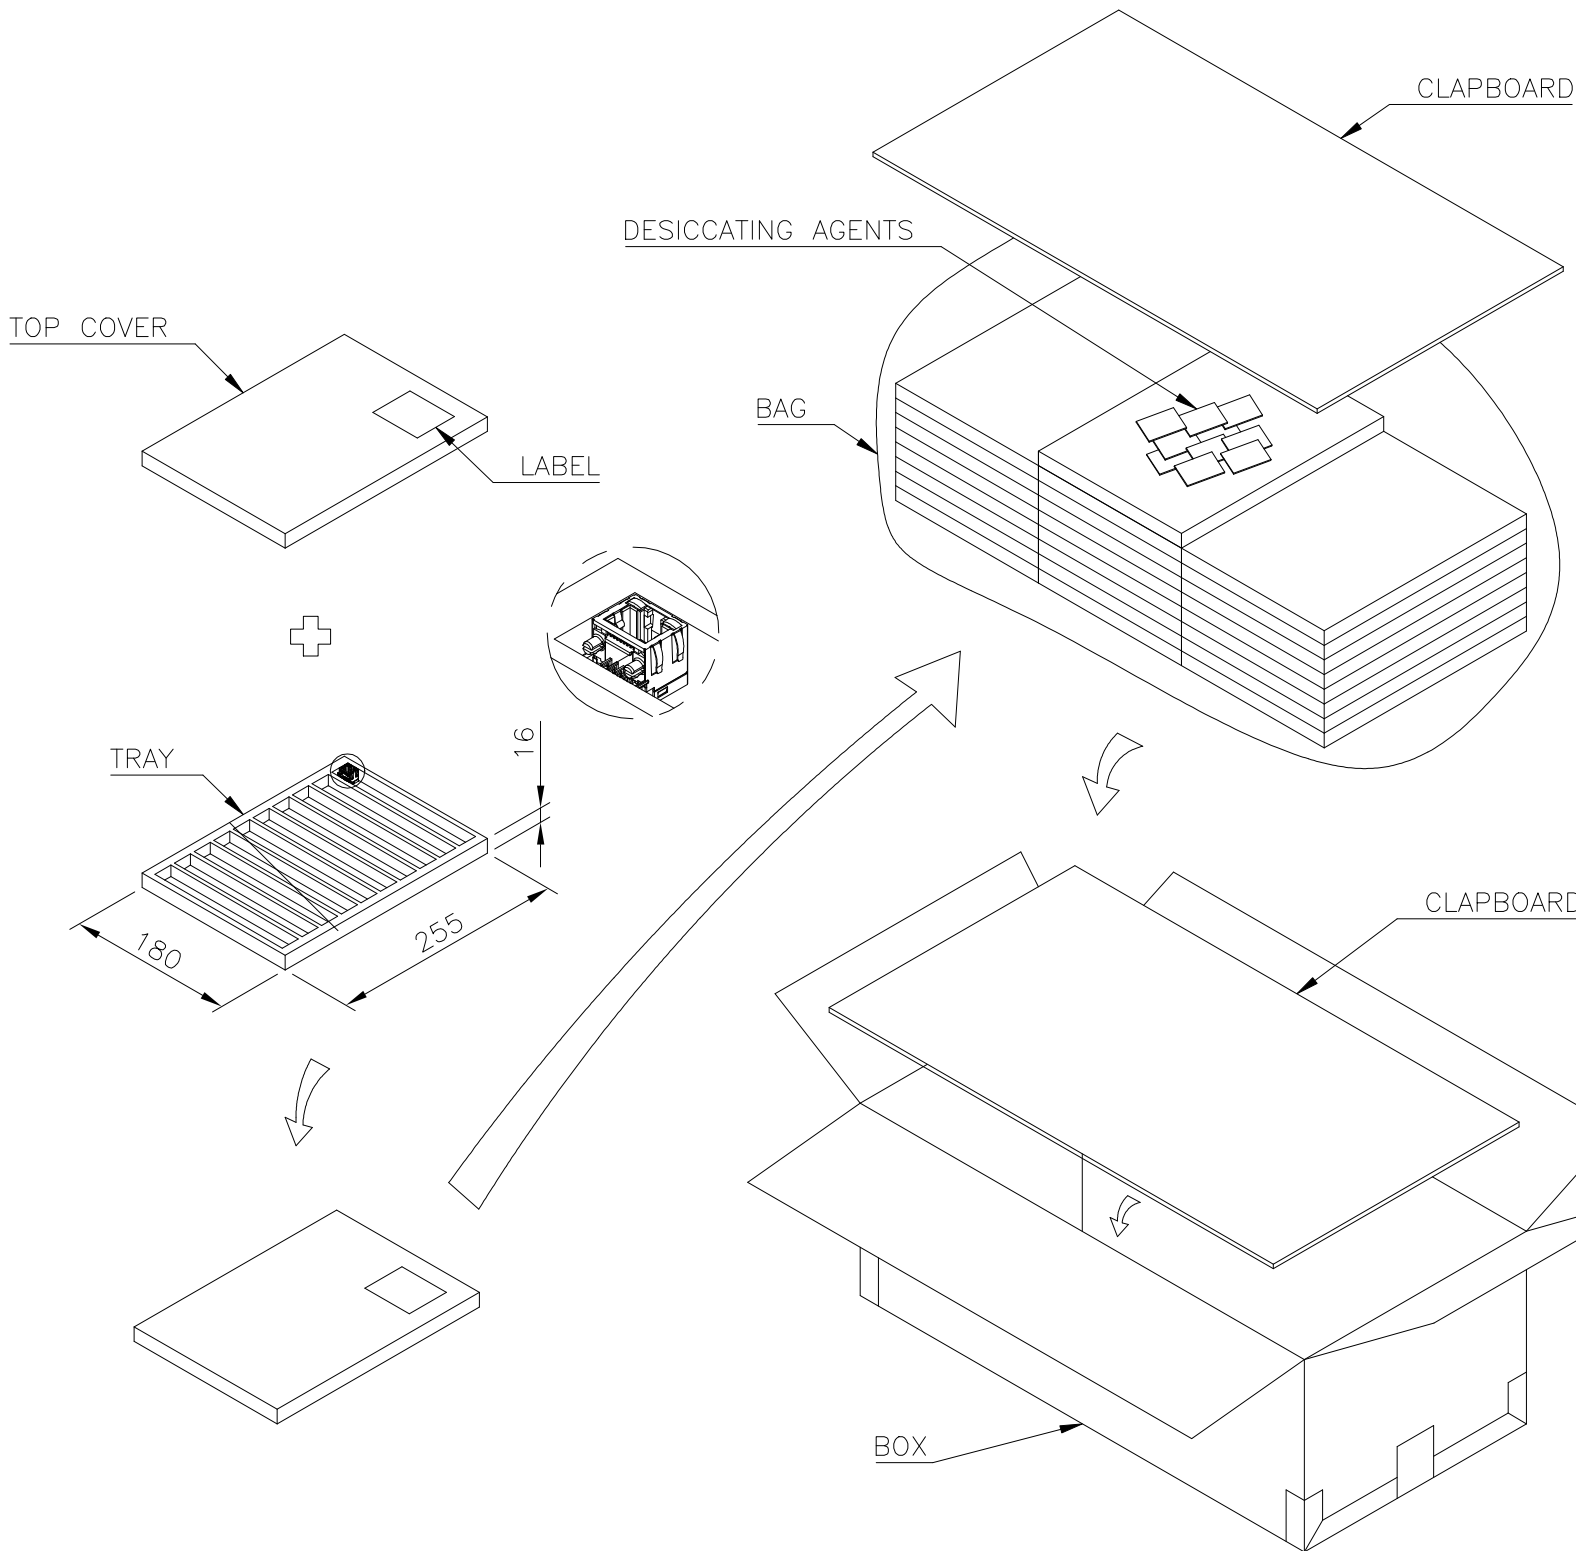

8.26 KG	7.26 KG	100	25	2500	2-1775134-X
14.15 KG	12.15 KG				1-1775134-X
12.7 KG	10.7 KG	90		2250	1775134-X
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAY/BOX	PCS/BOX	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O. HU 22OCT2007	 TE Connectivity				
		CHK S. HOU 22OCT2007					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD W.J. KE 22OCT2007	NAME MODULAR JACK, RJ45, SINGLE				
	0 PLC ± — 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± — ANGLES ± 3°	PRODUCT SPEC 108-57535					
MATERIAL SEE NOTE	FINISH SEE NOTE	APPLICATION SPEC —	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		WEIGHT 0	A3	00779	C-1775134	—	
CUSTOMER DRAWING					SCALE 1:1	SHEET 4 OF 4	REV B

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9