

Applications

- Commercial and Military Radar
- Communications
- Electronic Warfare
- Test Instrumentation
- General Purpose

Product Features

- SPDT, Reflective
- Frequency Range: 0.5 to 12 GHz
- Input Power: up to 20 W
- Insertion Loss: <1 dB
- Isolation: -35 dB Typical
- Switching Speed: <35 ns
- Control Voltages: 0 V/-40 V
- Dimensions: 4.0 x 4.0 x 1.42 mm

General Description


The TriQuint TGS2352-2-SM is a single-pole, double-throw (SPDT) reflective switch packaged in a 4x4mm ceramic, air-cavity QFN.

Fabricated on TriQuint's 0.25um GaN on SiC production process, the TGS2353-2-SM operates from 0.5-18GHz and can switch up to 10W with low insertion loss and high isolation.

The TGS2353-2-SM performance allows it to be used in a variety of applications across commercial and military markets; low and high power.


Lead-free and RoHS compliant

Evaluation Boards are available upon request.



QFN 4x4mm 22L

Functional Block Diagram

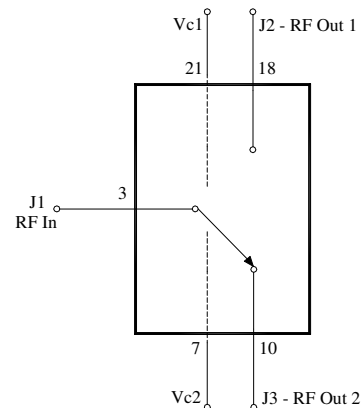

Pin Configuration

Pin No.	Label
1-2, 4-6, 8-9, 11-17, 19-20, 22-23	GND
3	RF IN
7	V _{C2}
10	RF OUT 2
18	RF OUT 1
21	V _{C1}

Ordering Information

Part No.	ECCN	Description
TGS2352-2-SM	EAR99	0.5 to 12 GHz High Power SPDT Reflective Switch

Absolute Maximum Ratings

Parameter	Rating
Control Voltage (V_C)	-50 V
Control Current (I_{DC})	-1.5 to 6 mA
Power Dissipation (P_{DISS})	5 W
RF Input Power, CW, 50 Ω , T = 25 °C	44 dBm
Channel Temperature (T_{CH})	275 °C
Mounting Temperature (30 Seconds)	320 °C
Storage Temperature	-40 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
V_{C1}		-40/0		V
V_{C2}		0/-40		V
I_{C1} / I_{C2}		-0.25 to 0.1		mA

Electrical performance is measured under conditions noted in the electrical specifications table. Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications

Test conditions unless otherwise noted: 25 °C, $V_{C1} = -40/0$ V, $V_{C2} = 0/-40$ V, see Function Table on page 7

Parameter	Min	Typ	Max	Units
Operational Frequency Range	0.5		12	GHz
Insertion Loss		<1		dB
Input Return Loss – Common Port		15		dB
Output Return Loss – Switched Port		15		dB
Isolation		-35		dB
Output Return Loss – Isolated Port		3		dB
Input Power		43		dBm
Insertion Loss Temperature Coefficient		-0.004		dB/°C
Switching Speed – On		31		ns
Switching Speed – Off		18		ns


Thermal and Reliability Information

Parameter	Condition	Value	Units
Thermal Resistance (θ_{JC}) ⁽¹⁾	$T_{BASE} = 85^{\circ}\text{C}$	21	$^{\circ}\text{C/W}$
Channel Temperature (T_{CH})	$T_{BASE} = 85^{\circ}\text{C}$, $V_{C1} = 0\text{ V}$, $V_{C2} = -40\text{ V}$,	166	$^{\circ}\text{C}$
Median Lifetime (T_M)	$P_{IN} = 20\text{ W}$, $P_{DISS} = 4.15\text{ W}$	3.21×10^8	Hours






Notes:

1. Measured to back of package







Median Lifetime

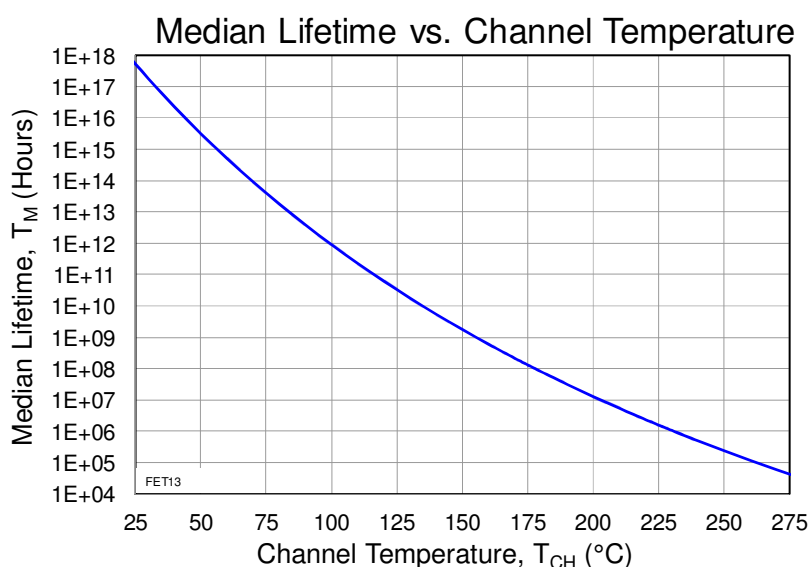




Typical Performance

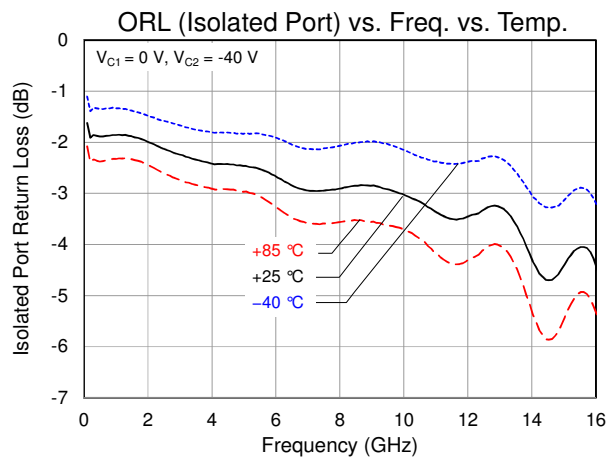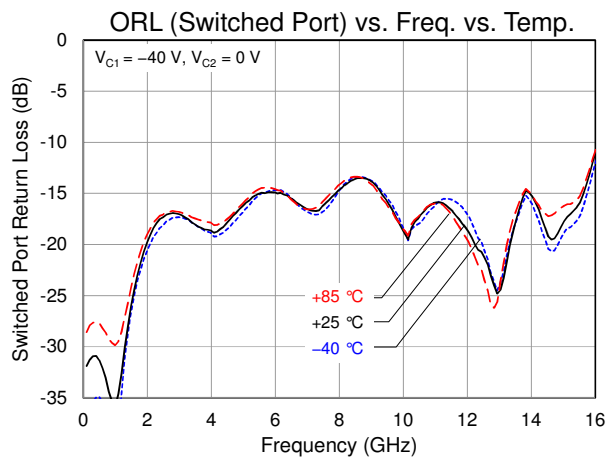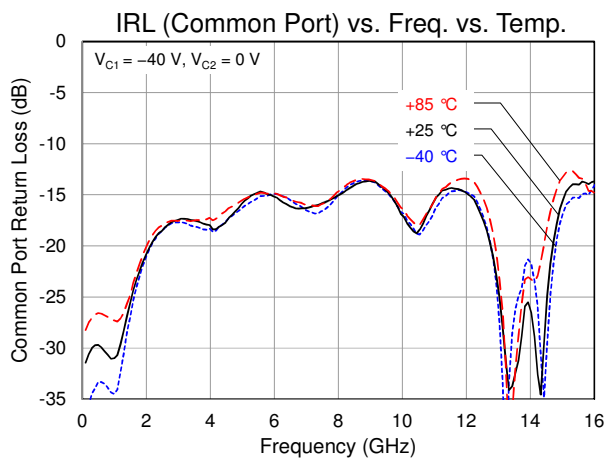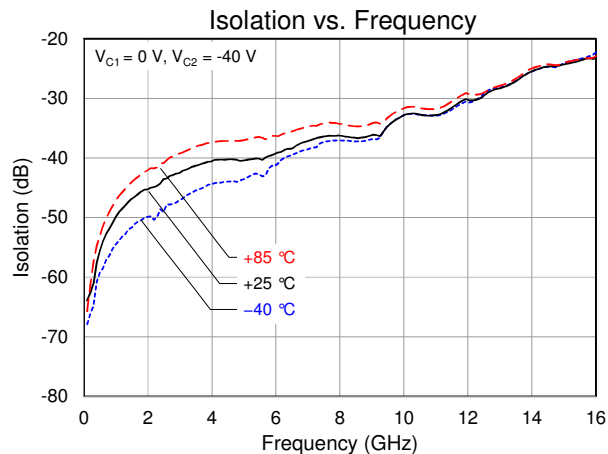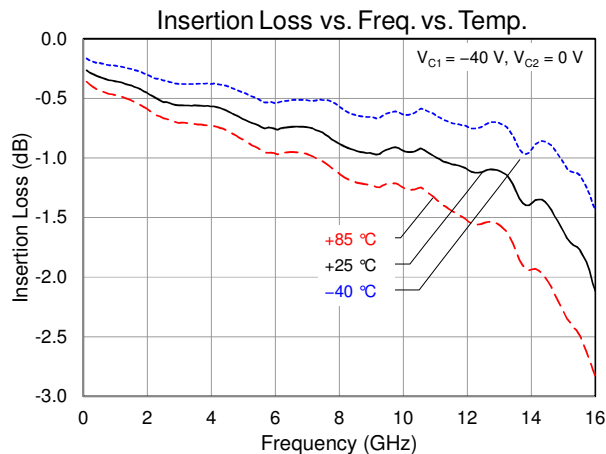


Typical Performance

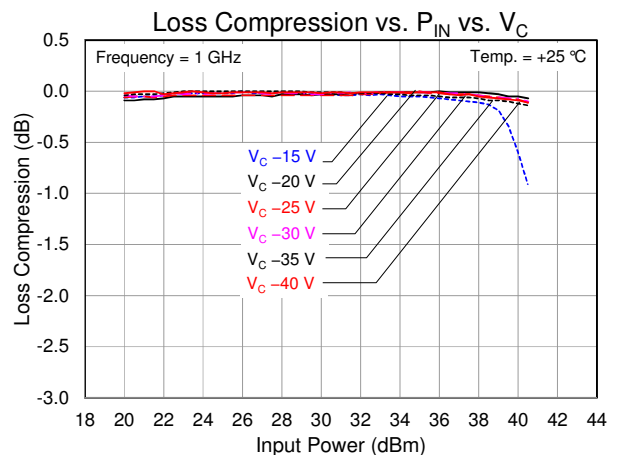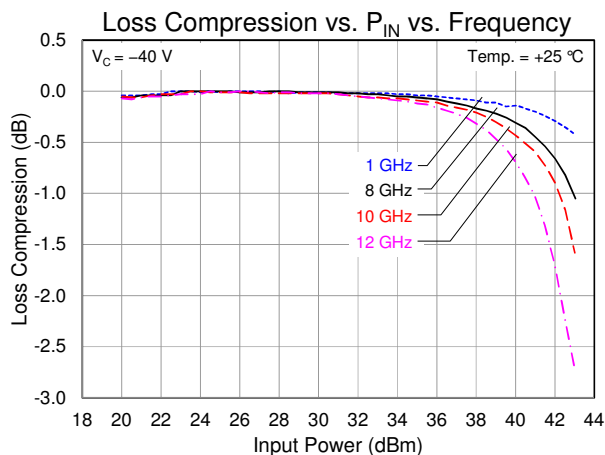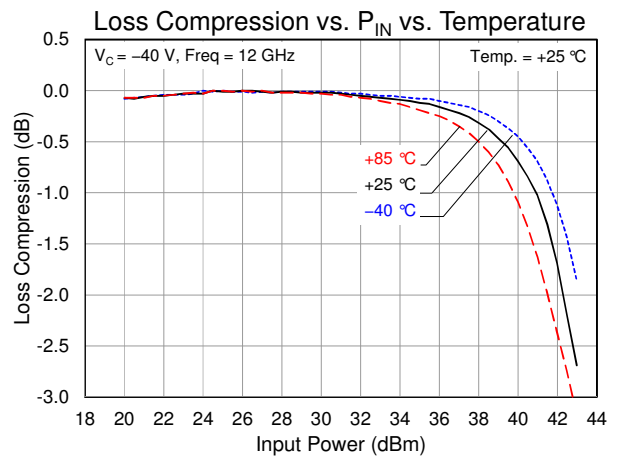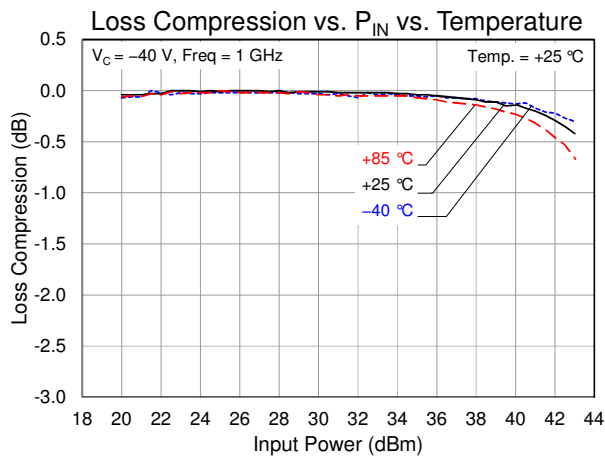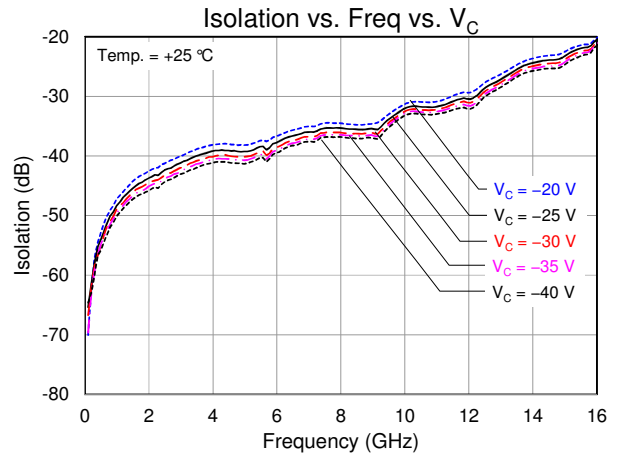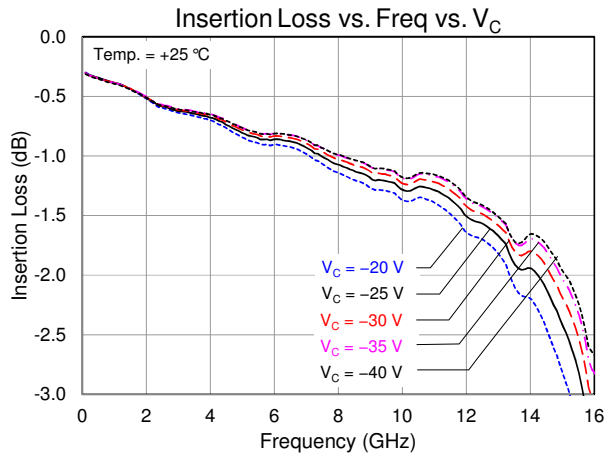

Typical Performance

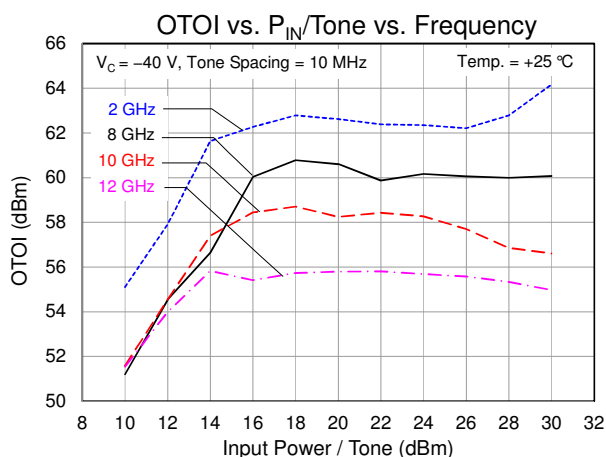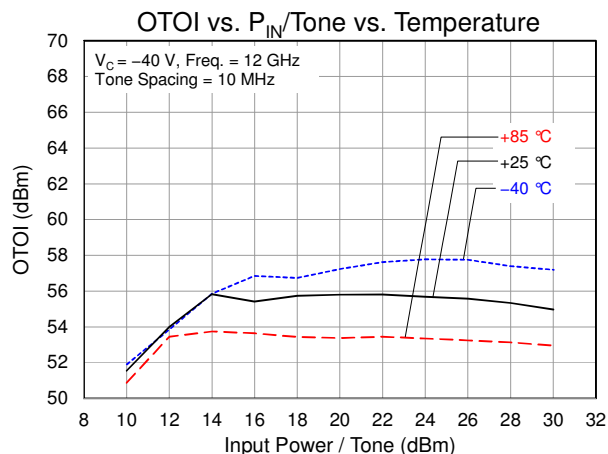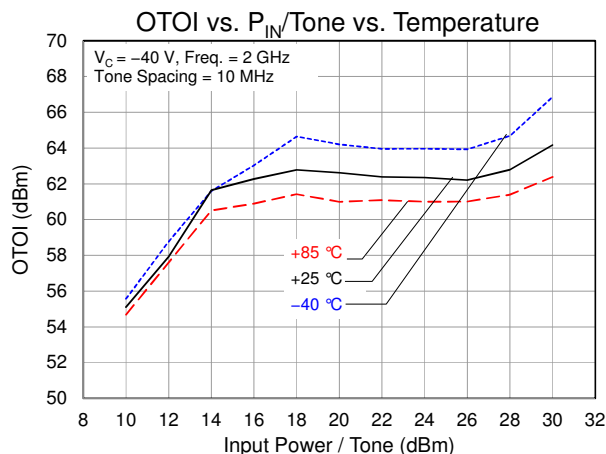

Application Circuit

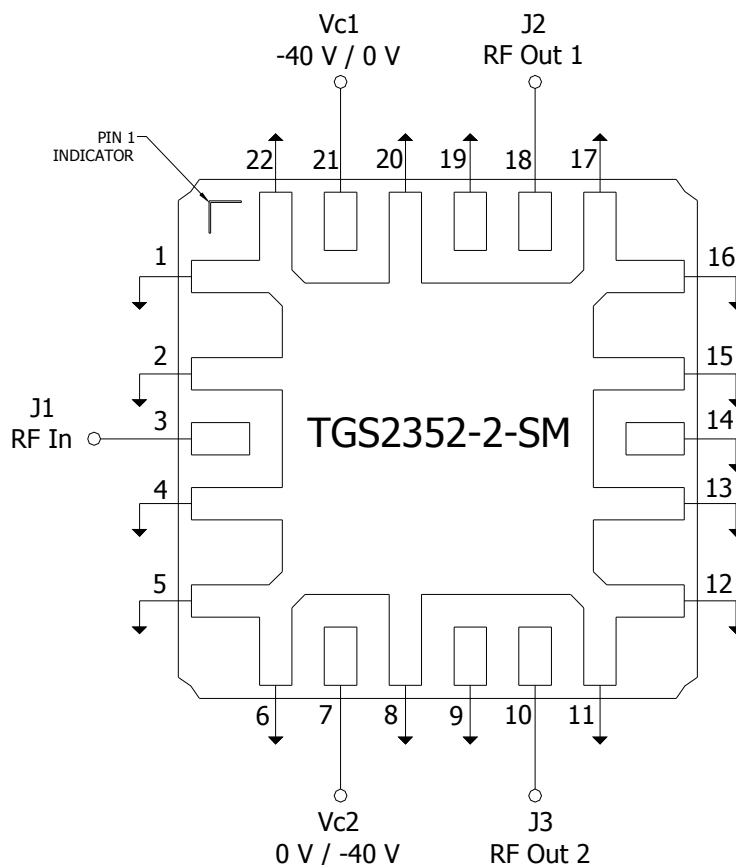

The switch can be configured as a Single-Pole, Single-Throw (SPST) by terminating one unused RF Out port with a 50 Ω load.

Bias-up Procedure

1. V_{C1} or V_{C2} set to 0 V (see Function Table for RF Path)
2. V_{C2} or V_{C1} set to -40 V (see Function Table for RF Path)
3. Apply RF signal to RF Input


Bias-down Procedure

1. Turn off RF supply
2. Turn V_{C2} or V_{C1} to 0 V
3. Turn V_{C1} or V_{C2} to 0 V

Function Table


RF Path	State	V_{C1}	V_{C2}
RF In to RF Out1 (50 Ω load to RF Out2)	Insertion Loss	0 V	-40 V
	Isolation	-40 V	0 V
RF In to RF Out2 (50 Ω load to RF Out1)	Insertion Loss	-40 V	0 V
	Isolation	0 V	-40 V

Pin Description

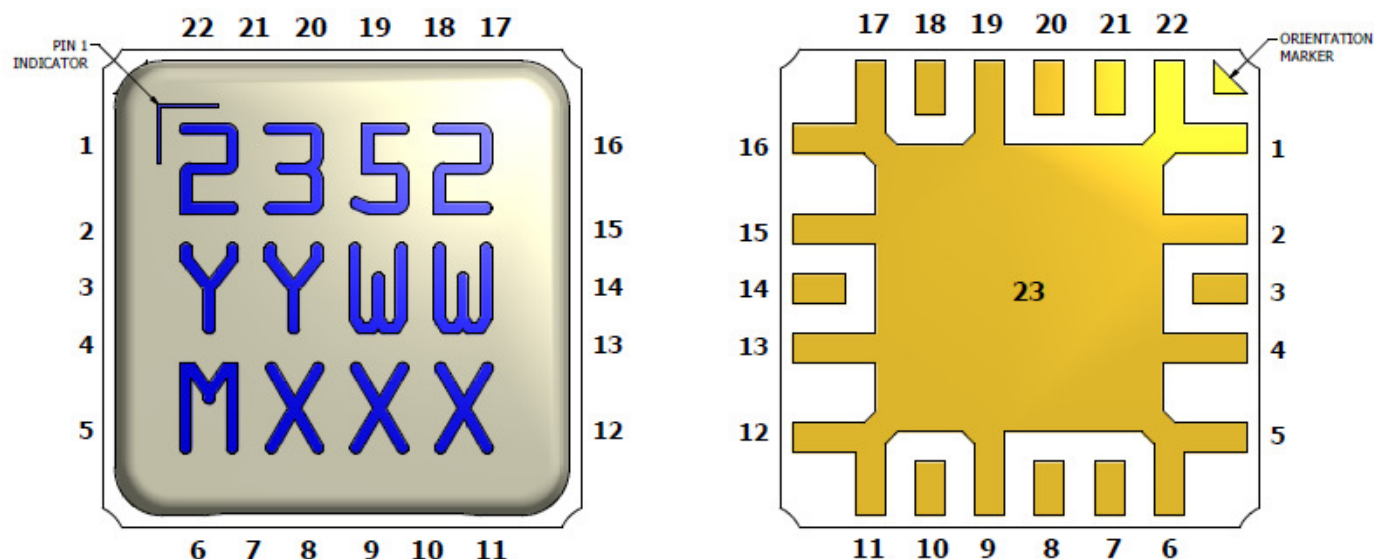


Pin No.	Label	Description
1-2, 4-6, 8-9, 11-17, 19-20, 22	GND	Connected to GND paddle (pin 23); must be grounded on PCB to improve isolation
3	RF IN	RF Input; matched to 50 ohms; DC coupled
7	V _{C2}	Control voltage #2; External components are not required
10	RF OUT 2	Output #2, matched to 50 Ω, DC coupled
18	RF OUT 1	Output #1, matched to 50 Ω, DC coupled
21	V _{C1}	Control voltage #1; External components are not required
23	GND	Backside Paddle. Multiple vias should be employed to minimize inductance and thermal resistance.

PC Board Layout

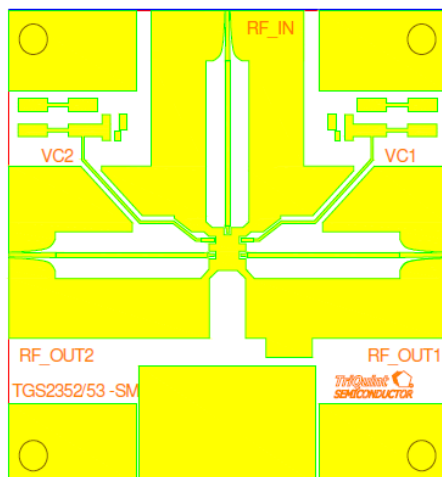


Mechanical Information – Package Information and Dimensions

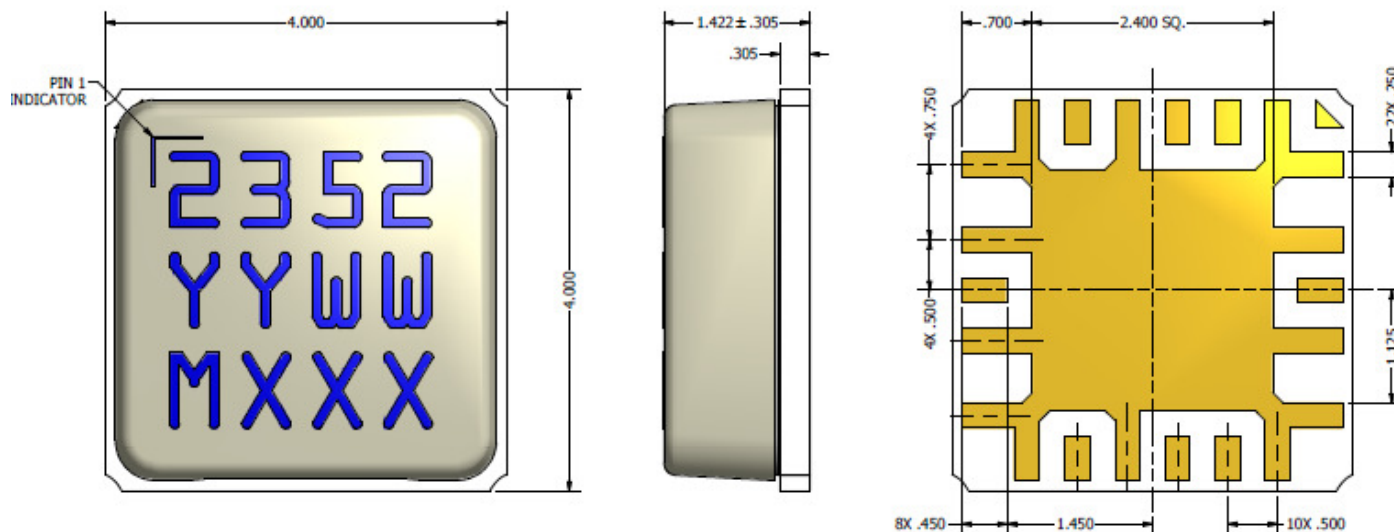

Notes:

1. Material:
 Package Base: Aluminum Nitride (AlN)
 Package Lid: Liquid Crystal Polymer (LCP)
2. Finish:
 Electroless Gold (Au): 2.54 to 8.89 μm
 over
 Electroless Nickel (Ni): 1.52 to 5.71 μm
3. Part marking:
 2352: Part number
 YY: Part Assembly year
 WW: Part Assembly week
 MXXX: Batch ID
4. Units: millimeters

Recommended Soldering Temperature Profile

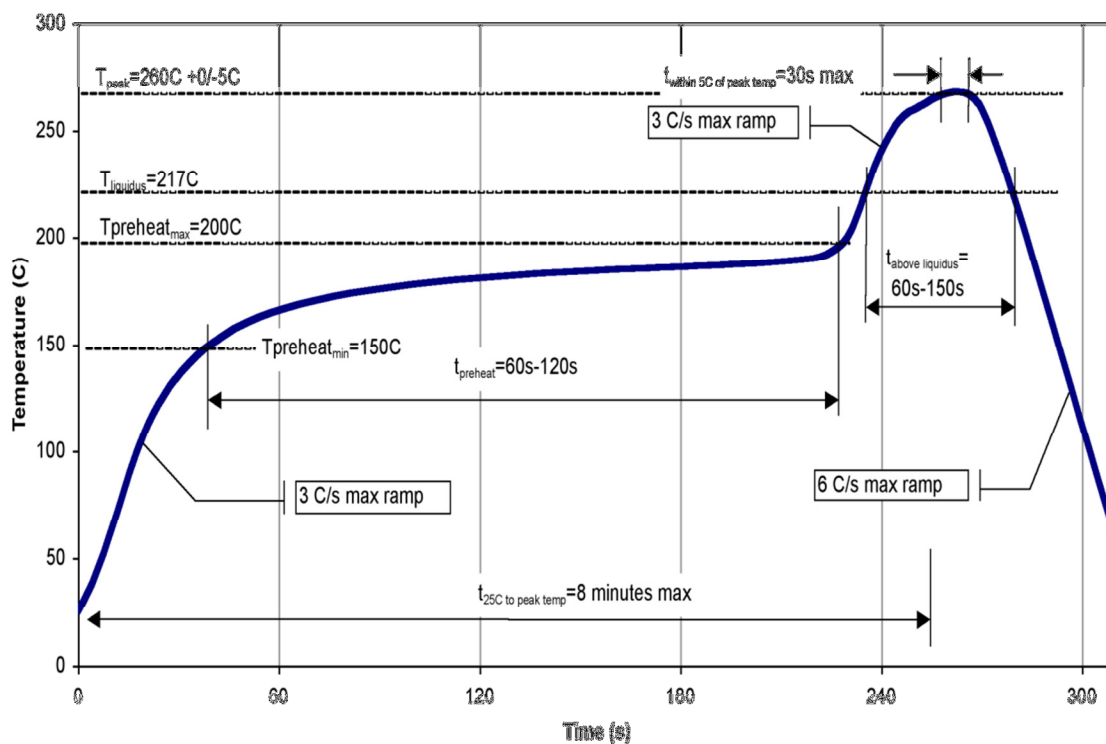

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: Class 1A
Value: Passes ≥ 250 V min.
Test: Human Body Model (HBM)
Standard: JEDEC Standard JESD22-A114

MSL Rating

Level 1 at +260 °C convection reflow
The part is rated Moisture Sensitivity Level TBD at 260 °C per
JEDEC standar IPC/JEDEC J-STD-020.

ECCN

US Department of Commerce EAR99

Solderability

Compatible with the latest version of J-STD-020, Lead-free solder, 260 °C.

RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ($C_{15}H_{12}Br_4O_2$) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com **Tel:** +1.972.994.8465
Email: info-sales@triquint.com **Fax:** +1.972.994.8504

For technical questions and application information:

Email: info-products@triquint.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9