



FCIconnect.com

Copyright FCI.

|             |          |     |          |                                       |             |                                  |     |                |                               |                                                                                          |  |            |  |
|-------------|----------|-----|----------|---------------------------------------|-------------|----------------------------------|-----|----------------|-------------------------------|------------------------------------------------------------------------------------------|--|------------|--|
| mat'l. code |          |     |          | surface<br>ISO 1302 ✓                 |             | tolerance<br>ISO 406<br>ISO 1101 |     | projection<br> |                               | product family<br>58EF                                                                   |  | CODE<br>JP |  |
| ltr         | ecn no   | dr  | date     | tolerances unless otherwise specified |             | mm                               |     | mm             |                               | title<br>0.5mm SPACING FPC CONNECTOR<br>DOCUMENT LIST<br>(Cat. No. : SFV__R-1/2STBE1HLF) |  |            |  |
| A           | J09-0075 | S.W | '09/2/19 | angles                                | linear      | scale                            |     | X              |                               | dwg no<br>JSA 97500                                                                      |  |            |  |
|             |          |     |          | dr                                    | S. Watake   | 2009-2-19                        | FCI |                | sheet 1 of 1                  |                                                                                          |  |            |  |
|             |          |     |          | enr                                   | S. Watake   | 2009-2-19                        |     |                | size<br>A4                    |                                                                                          |  |            |  |
|             |          |     |          | chr                                   | M. YAMAUCHI | 2009-2-19                        |     |                | type Product Customer Drawing |                                                                                          |  |            |  |
|             |          |     |          | appd                                  | P. Audano   | 2009-2-19                        |     |                | Rev<br>A                      |                                                                                          |  |            |  |
| sheet index | revision | A   |          |                                       |             |                                  |     |                |                               |                                                                                          |  |            |  |
|             | sheet    | 1   |          |                                       |             |                                  |     |                |                               |                                                                                          |  |            |  |

form: A4

1

2

PDM: Rev:A

STATUS:Released

Printed: Feb 22, 2009

## List of "SFV\_\_R-1/2STBE1HLF" customer document

| DOCUMENT NO. | LIST                                                                                        |
|--------------|---------------------------------------------------------------------------------------------|
| SC-SFV08     | SPEC.                                                                                       |
| JSA 97501    | CAT.NO.TABLE FOR 0.5mm CONTACT SPACING CONNECTOR (SFV__R-1/2STB_HLF)                        |
| JSA 97502    | CONNECTOR USED FOR FPC/FFC WITH 0.5mm CONTACT SPACING (SFV__R-1STB_HLF)                     |
| JSA 97503    | CONNECTOR USED FOR FPC/FFC WITH 0.5mm CONTACT SPACING (SFV__R-2STB_HLF)                     |
| JSA 97504    | CAT.NO.TABLE FOR PLASTIC TAPE PACKAGED 0.5mm CONTACT SPACING CONNECTOR (SFV__R-1/2STBE1HLF) |
| JSA 97505    | PLASTIC TAPE PACKAGED 0.5mm CONTACT SPACING CONNECTOR (SFV__R-1STBE1HLF)                    |
| JSA 97506    | PLASTIC TAPE PACKAGED 0.5mm CONTACT SPACING CONNECTOR (SFV__R-2STBE1HLF)                    |
| JSA96019     | RECOMMENDED CABLE (FPC) (SFV__R-1/2ST__LF)                                                  |
| JSA97202     | RECOMMENDED CABLE (FFC) (SFV__R-1/2ST__)                                                    |
| BJM-SFV101   | HANDLING PROCEDURES                                                                         |

CAT. NO. & DIMENSIONS

| NO. OF CONTACTS (n) | CAT. NO.           | DIMENSIONS (NOTE2) |         |         |         |
|---------------------|--------------------|--------------------|---------|---------|---------|
|                     |                    | A ± 0.2            | B ± 0.2 | C ± 0.1 | D ± 0.1 |
| 4                   | SFV4R-1/2STB__HLF  | 7.5                | 5.9     | 1.5     | 2.7     |
| 5                   | SFV5R-1/2STB__HLF  | 8.0                | 6.4     | 2.0     | 3.2     |
| 6                   | SFV6R-1/2STB__HLF  | 8.5                | 6.9     | 2.5     | 3.7     |
| 7                   | SFV7R-1/2STB__HLF  | 9.0                | 7.4     | 3.0     | 4.2     |
| 8                   | SFV8R-1/2STB__HLF  | 9.5                | 7.9     | 3.5     | 4.7     |
| 9                   | SFV9R-1/2STB__HLF  | 10.0               | 8.4     | 4.0     | 5.2     |
| 10                  | SFV10R-1/2STB__HLF | 10.5               | 8.9     | 4.5     | 5.7     |
| 11                  | SFV11R-1/2STB__HLF | 11.0               | 9.4     | 5.0     | 6.2     |
| 12                  | SFV12R-1/2STB__HLF | 11.5               | 9.9     | 5.5     | 6.7     |
| 13                  | SFV13R-1/2STB__HLF | 12.0               | 10.4    | 6.0     | 7.2     |
| 14                  | SFV14R-1/2STB__HLF | 12.5               | 10.9    | 6.5     | 7.7     |
| 15                  | SFV15R-1/2STB__HLF | 13.0               | 11.4    | 7.0     | 8.2     |
| 16                  | SFV16R-1/2STB__HLF | 13.5               | 11.9    | 7.5     | 8.7     |
| 17                  | SFV17R-1/2STB__HLF | 14.0               | 12.4    | 8.0     | 9.2     |
| 18                  | SFV18R-1/2STB__HLF | 14.5               | 12.9    | 8.5     | 9.7     |
| 19                  | SFV19R-1/2STB__HLF | 15.0               | 13.4    | 9.0     | 10.2    |
| 20                  | SFV20R-1/2STB__HLF | 15.5               | 13.9    | 9.5     | 10.7    |
| 21                  | SFV21R-1/2STB__HLF | 16.0               | 14.4    | 10.0    | 11.2    |
| 22                  | SFV22R-1/2STB__HLF | 16.5               | 14.9    | 10.5    | 11.7    |
| 23                  | SFV23R-1/2STB__HLF | 17.0               | 15.4    | 11.0    | 12.2    |
| 24                  | SFV24R-1/2STB__HLF | 17.5               | 15.9    | 11.5    | 12.7    |
| 25                  | SFV25R-1/2STB__HLF | 18.0               | 16.4    | 12.0    | 13.2    |
| 26                  | SFV26R-1/2STB__HLF | 18.5               | 16.9    | 12.5    | 13.7    |
| 27                  | SFV27R-1/2STB__HLF | 19.0               | 17.4    | 13.0    | 14.2    |
| 28                  | SFV28R-1/2STB__HLF | 19.5               | 17.9    | 13.5    | 14.7    |
| 29                  | SFV29R-1/2STB__HLF | 20.0               | 18.4    | 14.0    | 15.2    |
| 30                  | SFV30R-1/2STB__HLF | 20.5               | 18.9    | 14.5    | 15.7    |
| 31                  | SFV31R-1/2STB__HLF | 21.0               | 19.4    | 15.0    | 16.2    |
| 32                  | SFV32R-1/2STB__HLF | 21.5               | 19.9    | 15.5    | 16.7    |
| 33                  | SFV33R-1/2STB__HLF | 22.0               | 20.4    | 16.0    | 17.2    |
| 34                  | SFV34R-1/2STB__HLF | 22.5               | 20.9    | 16.5    | 17.7    |
| 35                  | SFV35R-1/2STB__HLF | 23.0               | 21.4    | 17.0    | 18.2    |

CAT. NO.      SFV    (n)    R    - 1    ST    B    \_    HLF

SERIES NAME      \_\_\_\_\_

NO. OF CONTACTS      \_\_\_\_\_

RIGHT ANGLE TYPE      \_\_\_\_\_

FOR FPC/FFC, CONTACT DIRECTION      \_\_\_\_\_

1. LOWER CONTACT TYPE

2. UPPER CONTACT TYPE

FOR AUTOMATIC MOUNTING (SMT)      \_\_\_\_\_



PLATING VARIATION      \_\_\_\_\_


PACKAGE STYLE      \_\_\_\_\_

HALOGEN and LEAD FREE      \_\_\_\_\_

NOTES

1. THIS PRODUCT IS THE CONNECTOR USED FOR FPC AND COPEs WITH AUTOMATIC MOUNTING (SMT).
2. SEE PART DRAWINGS FOR DIMENSIONS A~D.

|             |          |     |          |                                                                                                                                                                       |                       |                                                                                                |                                                                                     |                                                                                              |                               |         |              |
|-------------|----------|-----|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------|---------|--------------|
| mat'l. code |          |     |          | surface <input checked="" type="checkbox"/> ISO 1302 <input type="checkbox"/> tolerance <input checked="" type="checkbox"/> ISO 406 <input type="checkbox"/> ISO 1101 |                       | projection  |                                                                                     | product family 58EF                                                                          |                               | CODE JP |              |
| ltr         | ecn no   | dr  | date     | tolerances unless otherwise specified                                                                                                                                 |                       | mm          |                                                                                     | title<br>CAT. NO. TABLE FOR 0.5 mm CONTACT SPACING CONNECTOR (Cat. No. : SFV__R-1/2STB__HLF) |                               |         |              |
| A           | J09-0075 | S.W | '09/2/19 | angles                                                                                                                                                                | linear                |                                                                                                |                                                                                     |                                                                                              |                               |         |              |
|             |          |     |          | dr                                                                                                                                                                    | <i>S. Nishida</i>     | 2009-2-19                                                                                      |  |                                                                                              | dwg no                        |         | sheet 1 of 1 |
|             |          |     |          | enr                                                                                                                                                                   | <i>S. Nishida</i>     | 2009-2-19                                                                                      |                                                                                     |                                                                                              | JSA 97501                     |         | A4           |
|             |          |     |          | chr                                                                                                                                                                   | <i>H. VAMPISSETTA</i> | 2009-2-19                                                                                      |                                                                                     |                                                                                              | type Product Customer Drawing |         |              |
|             |          |     |          | appd                                                                                                                                                                  | <i>J. Cladman</i>     | 2009-2-19                                                                                      |                                                                                     |                                                                                              |                               |         |              |
| sheet index | revision | A   |          |                                                                                                                                                                       |                       |                                                                                                |                                                                                     |                                                                                              |                               |         | Rev. A       |

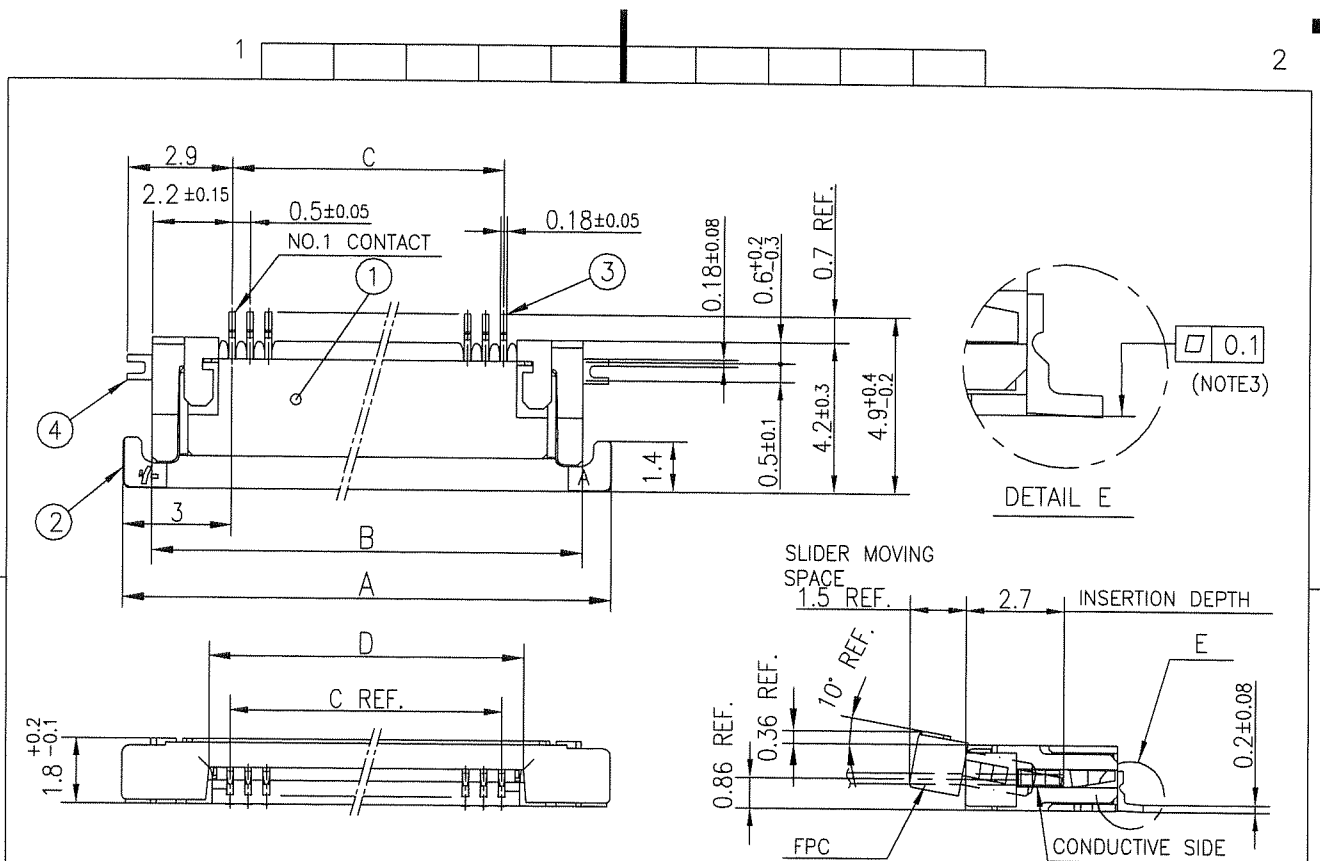


| PT. NO. | PARTS NAME     | MATERIAL                                             | Q'TY | NOTE                         |
|---------|----------------|------------------------------------------------------|------|------------------------------|
| 1       | HOUSING        | 13~35pin : LCP RESIN GLASS REINFORCED (UL94V-0)      | 1    | COLOR : BLACK (HALOGEN FREE) |
|         |                | 4~12pin : POLYAMIDE RESIN GLASS REINFORCED (UL94V-0) |      |                              |
| 2       | SLIDER         | PPS RESIN GLASS REINFORCED (UL94V-0)                 | 1    | COLOR : BLACK (HALOGEN FREE) |
| 3       | CONTACT        | PHOSPHOR BRONZE                                      | n    | PLATING : GOLD               |
| 4       | MOUNTING PLATE |                                                      | 2    | PLATING : LEAD FREE          |

RECOMMENDED PC BOARD LAYOUT  
(COMPONENT SIDE)

PATTERN FOR  
MOUNTING PLATE  
FIXING


n : NO. OF CONTACTS

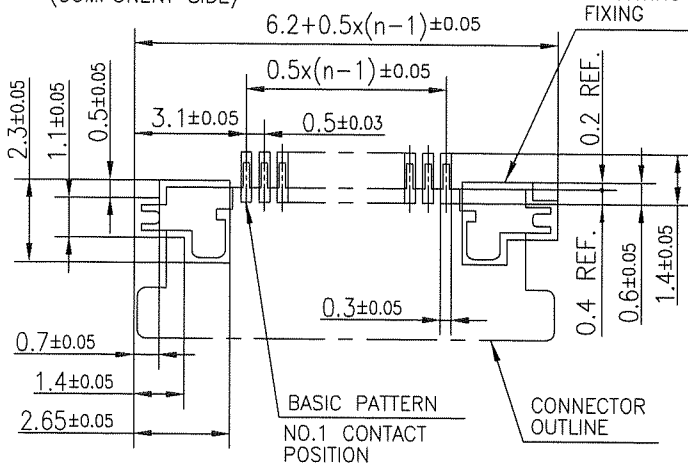

#### NOTES

- THIS PRODUCT IS THE CONNECTOR USED FOR FPC AND COPS WITH AUTOMATIC MOUNTING (SMT).
- THIS PRODUCT IS LOWER CONTACT TYPE CONNECTOR.
- FLATNESS OF CONTACT TERMINAL AND MOUNTING PLATE MUST BE WITHIN TOLERANCE IN E PORTION DETAILED DRAWING.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDERING OVEN.

|             |          |     |           |                                       |                                  |                |                                                                                                |              |
|-------------|----------|-----|-----------|---------------------------------------|----------------------------------|----------------|------------------------------------------------------------------------------------------------|--------------|
| mat'l. code |          |     |           | surface<br>ISO 1302 ✓                 | tolerance<br>ISO 406<br>ISO 1101 | projection<br> | product family<br>58EF                                                                         | CODE<br>JP   |
| ltr         | ecn no   | dr  | date      | tolerances unless otherwise specified |                                  | mm<br>         | title<br>CONNECTOR USED FOR FPC<br>WITH 0.5 mm CONTACT SPACING<br>(Cat No. : SFV__R-1STB__HLF) |              |
| A           | J09-0075 | S.W | 2009-2-19 | angles                                | linear                           |                |                                                                                                |              |
| B           | J10-0245 | S.W | 2010-9-14 |                                       |                                  | scale X        | dwg no                                                                                         | sheet 1 of 1 |
|             |          |     |           | dr                                    |                                  |                | JSA 97502                                                                                      | size<br>A4   |
|             |          |     |           | enr                                   |                                  |                | type Product Customer Drawing                                                                  |              |
|             |          |     |           | chr                                   |                                  |                |                                                                                                |              |
|             |          |     |           | appd                                  |                                  |                |                                                                                                | Rev.<br>B    |
| sheet index | revision | B   |           |                                       |                                  |                |                                                                                                |              |
|             | sheet    | 1   |           |                                       |                                  |                |                                                                                                |              |

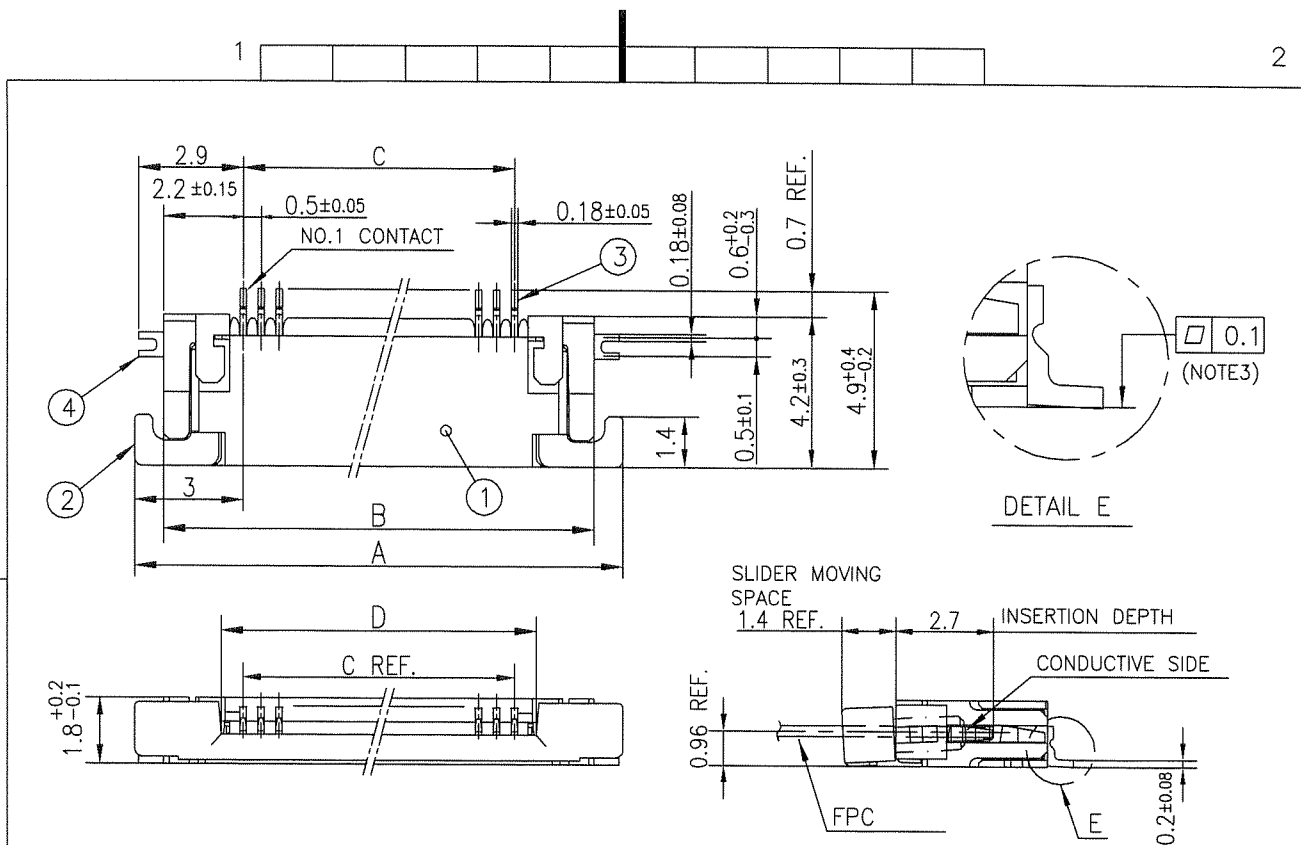


| PT. NO. | PARTS NAME     | MATERIAL                                             | Q'TY | NOTE                         |
|---------|----------------|------------------------------------------------------|------|------------------------------|
| 1       | HOUSING        | 13~35pin : LCP RESIN GLASS REINFORCED (UL94V-0)      | 1    | COLOR : BLACK (HALOGEN FREE) |
|         |                | 4~12pin : POLYAMIDE RESIN GLASS REINFORCED (UL94V-0) |      |                              |
| 2       | SLIDER         | PPS RESIN GLASS REINFORCED (UL94V-0)                 | 1    | COLOR : BLACK (HALOGEN FREE) |
| 3       | CONTACT        | PHOSPHOR BRONZE                                      | n    | PLATING : GOLD               |
| 4       | MOUNTING PLATE |                                                      | 2    | PLATING : LEAD FREE          |

RECOMMENDED PC BOARD LAYOUT  
(COMPONENT SIDE)

PATTERN FOR  
MOUNTING PLATE  
FIXING

n : NO. OF CONTACTS

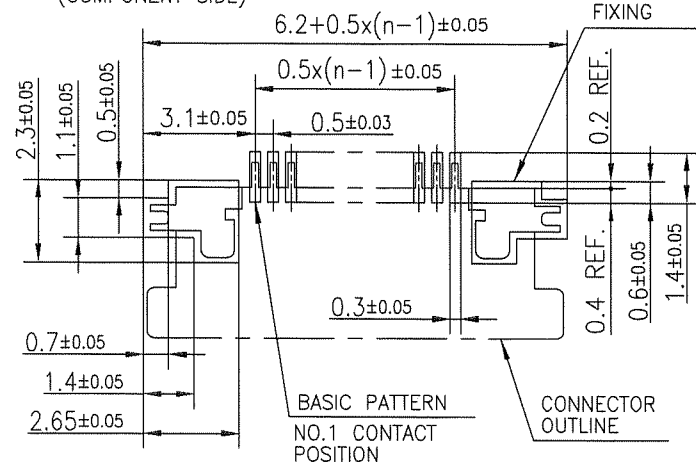


#### NOTES

1. THIS PRODUCT IS THE CONNECTOR USED FOR FPC AND COPS WITH AUTOMATIC MOUNTING (SMT).
2. THIS PRODUCT IS UPPER CONTACT TYPE CONNECTOR.
3. FLATNESS OF CONTACT TERMINAL AND MOUNTING PLATE MUST BE WITHIN TOLERANCE IN E PORTION DETAILED DRAWING.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDERING OVEN.

|             |          |     |           |                                       |                                  |                |                                                                                                 |                          |
|-------------|----------|-----|-----------|---------------------------------------|----------------------------------|----------------|-------------------------------------------------------------------------------------------------|--------------------------|
| mat'l. code |          |     |           | surface<br>ISO 1302 ✓                 | tolerance<br>ISO 406<br>ISO 1101 | projection<br> | product family<br>58EF                                                                          | CODE<br>JP               |
| ltr         | ecn no   | dr  | date      | tolerances unless otherwise specified |                                  | mm<br>         | title<br>CONNECTOR USED FOR FPC<br>WITH 0.5 mm CONTACT SPACING<br>(Cat. No. : SFV__R-2STB__HLF) |                          |
| A           | J09-0075 | S.W | 2009-2-19 | angles                                | linear                           |                |                                                                                                 |                          |
| B           | J10-0245 | S.W | 2010-9-14 |                                       |                                  | scale $\times$ | dwg no                                                                                          | sheet 1 of 1 size        |
|             |          |     |           | dr                                    | S. Watanabe 2010-9-14            |                | JSA 97503                                                                                       |                          |
|             |          |     |           | enr                                   | S. Watanabe 2010-9-14            |                |                                                                                                 |                          |
|             |          |     |           | chr                                   | M. Yamashita 2010-9-14           |                |                                                                                                 |                          |
|             |          |     |           | app                                   | M. Yamashita 2010-9-14           |                |                                                                                                 |                          |
| sheet index | revision | B   |           |                                       |                                  |                | type                                                                                            | Product Customer Drawing |
|             | sheet    | 1   |           |                                       |                                  |                |                                                                                                 | Rev. B                   |





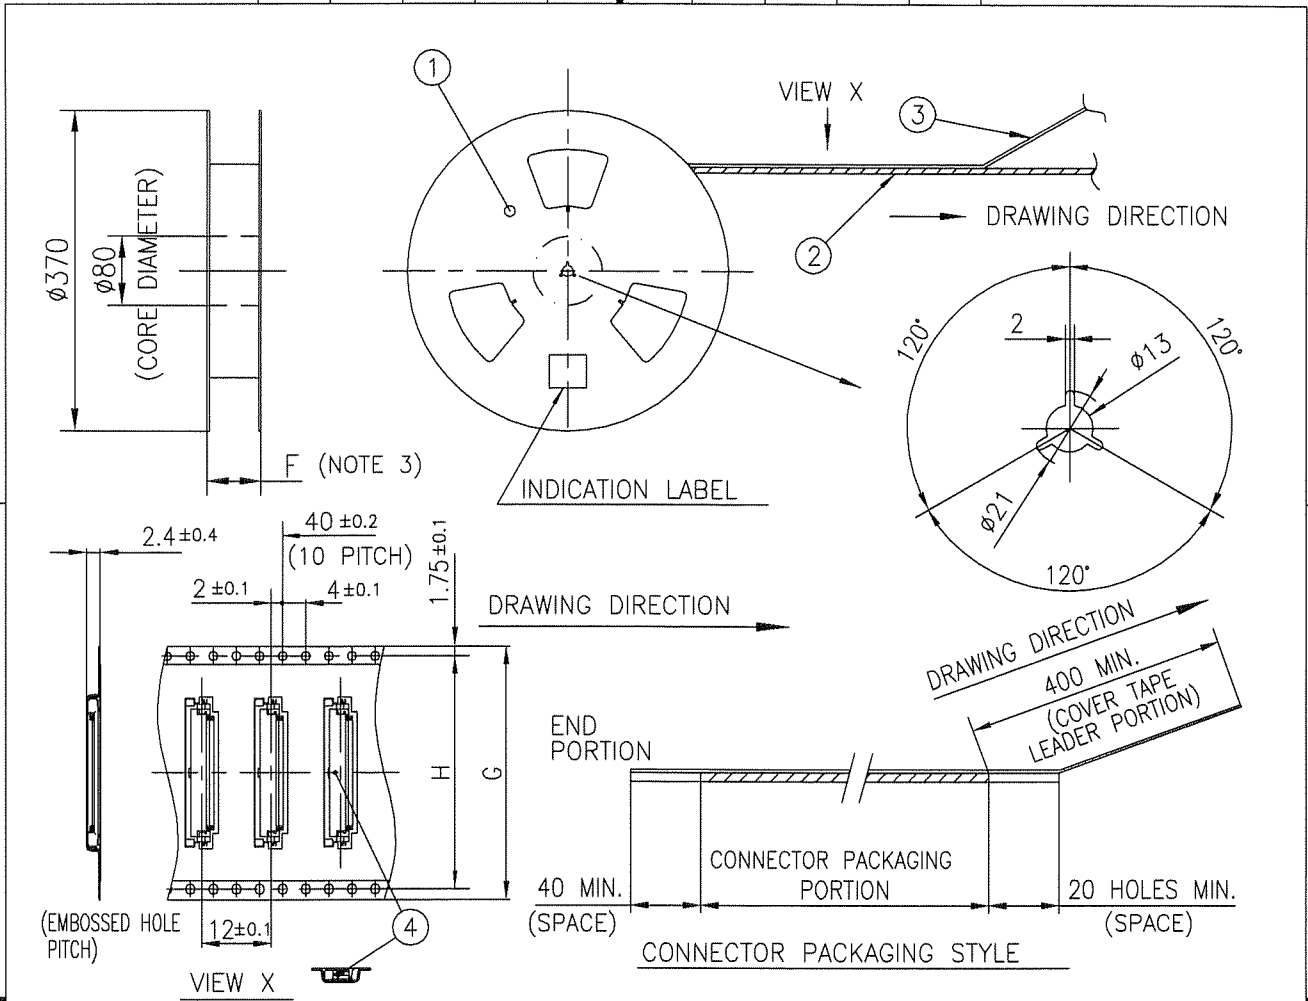


| PT. NO. | PARTS NAME            | CAT. NO.         | MATERIAL          | Q'TY | NOTE                 |
|---------|-----------------------|------------------|-------------------|------|----------------------|
| 1       | REEL                  |                  | CARDBOARD         | 1    | COLOR : WHITE        |
| 2       | PLASTIC (EMBOSS) TAPE |                  | A-PET             |      | COLOR : TRANSPARENCY |
| 3       | COVER                 |                  | POLYESTER         |      | COLOR : TRANSPARENCY |
| 4       | CONNECTOR             | SFV__R-1STB__HLF | SEE ATTACHED DWG. | 3000 | LOWER CONTACT TYPE   |

NOTES

1. THIS IS PLASTIC TAPE PACKAGED CONNECTOR USED FOR FPC AND CYPES WITH AUTOMATIC MOUNTING (SMT).
2. SEE JIS C 0806 (PACKING OF ELECTRONIC COMPONENTS ON CONTINUOUS TAPES (SURFACE MOUNTING DEVICES)) FOR SHAPE AND DIMENSIONS OF PLASTIC (EMBOSS) TAPE AND REEL.
3. F DIMENSION IS PORTION OF THE CORE.

|             |  |                                                    |  |             |  |                     |  |                                                                                      |  |
|-------------|--|----------------------------------------------------|--|-------------|--|---------------------|--|--------------------------------------------------------------------------------------|--|
| mat'l. code |  | surface 58 / tolerance ISO 1302 ✓ ISO 406 ISO 1101 |  | projection  |  | product family 58EF |  | CODE JP                                                                              |  |
| ltr         |  | ecn no                                             |  | dr          |  | date                |  | title                                                                                |  |
| A           |  | J09-0075                                           |  | S.W         |  | '09/2/19            |  | PLASTIC TAPE PACKAGED 0.5 mm CONTACT SPACING CONNECTOR (Cat. No. : SFV__R-1STBE1HLF) |  |
|             |  |                                                    |  | angles      |  | linear              |  | mm                                                                                   |  |
|             |  |                                                    |  | ±5°         |  |                     |  | scale X                                                                              |  |
|             |  | dr                                                 |  | S. Nishida  |  | 2009-2-19           |  | dwg no                                                                               |  |
|             |  | enr                                                |  | S. Nishida  |  | 2009-2-19           |  | sheet 1 of 1 size                                                                    |  |
|             |  | chr                                                |  | M. YAMAHATA |  | 2009-2-19           |  | JSA 97505 A4                                                                         |  |
|             |  | appd                                               |  | S. Chidam   |  | 2009-2-19           |  | type Product Customer Drawing                                                        |  |
| sheet index |  | revision                                           |  | A           |  |                     |  | Rev.                                                                                 |  |
| sheet       |  | 1                                                  |  |             |  |                     |  | A                                                                                    |  |

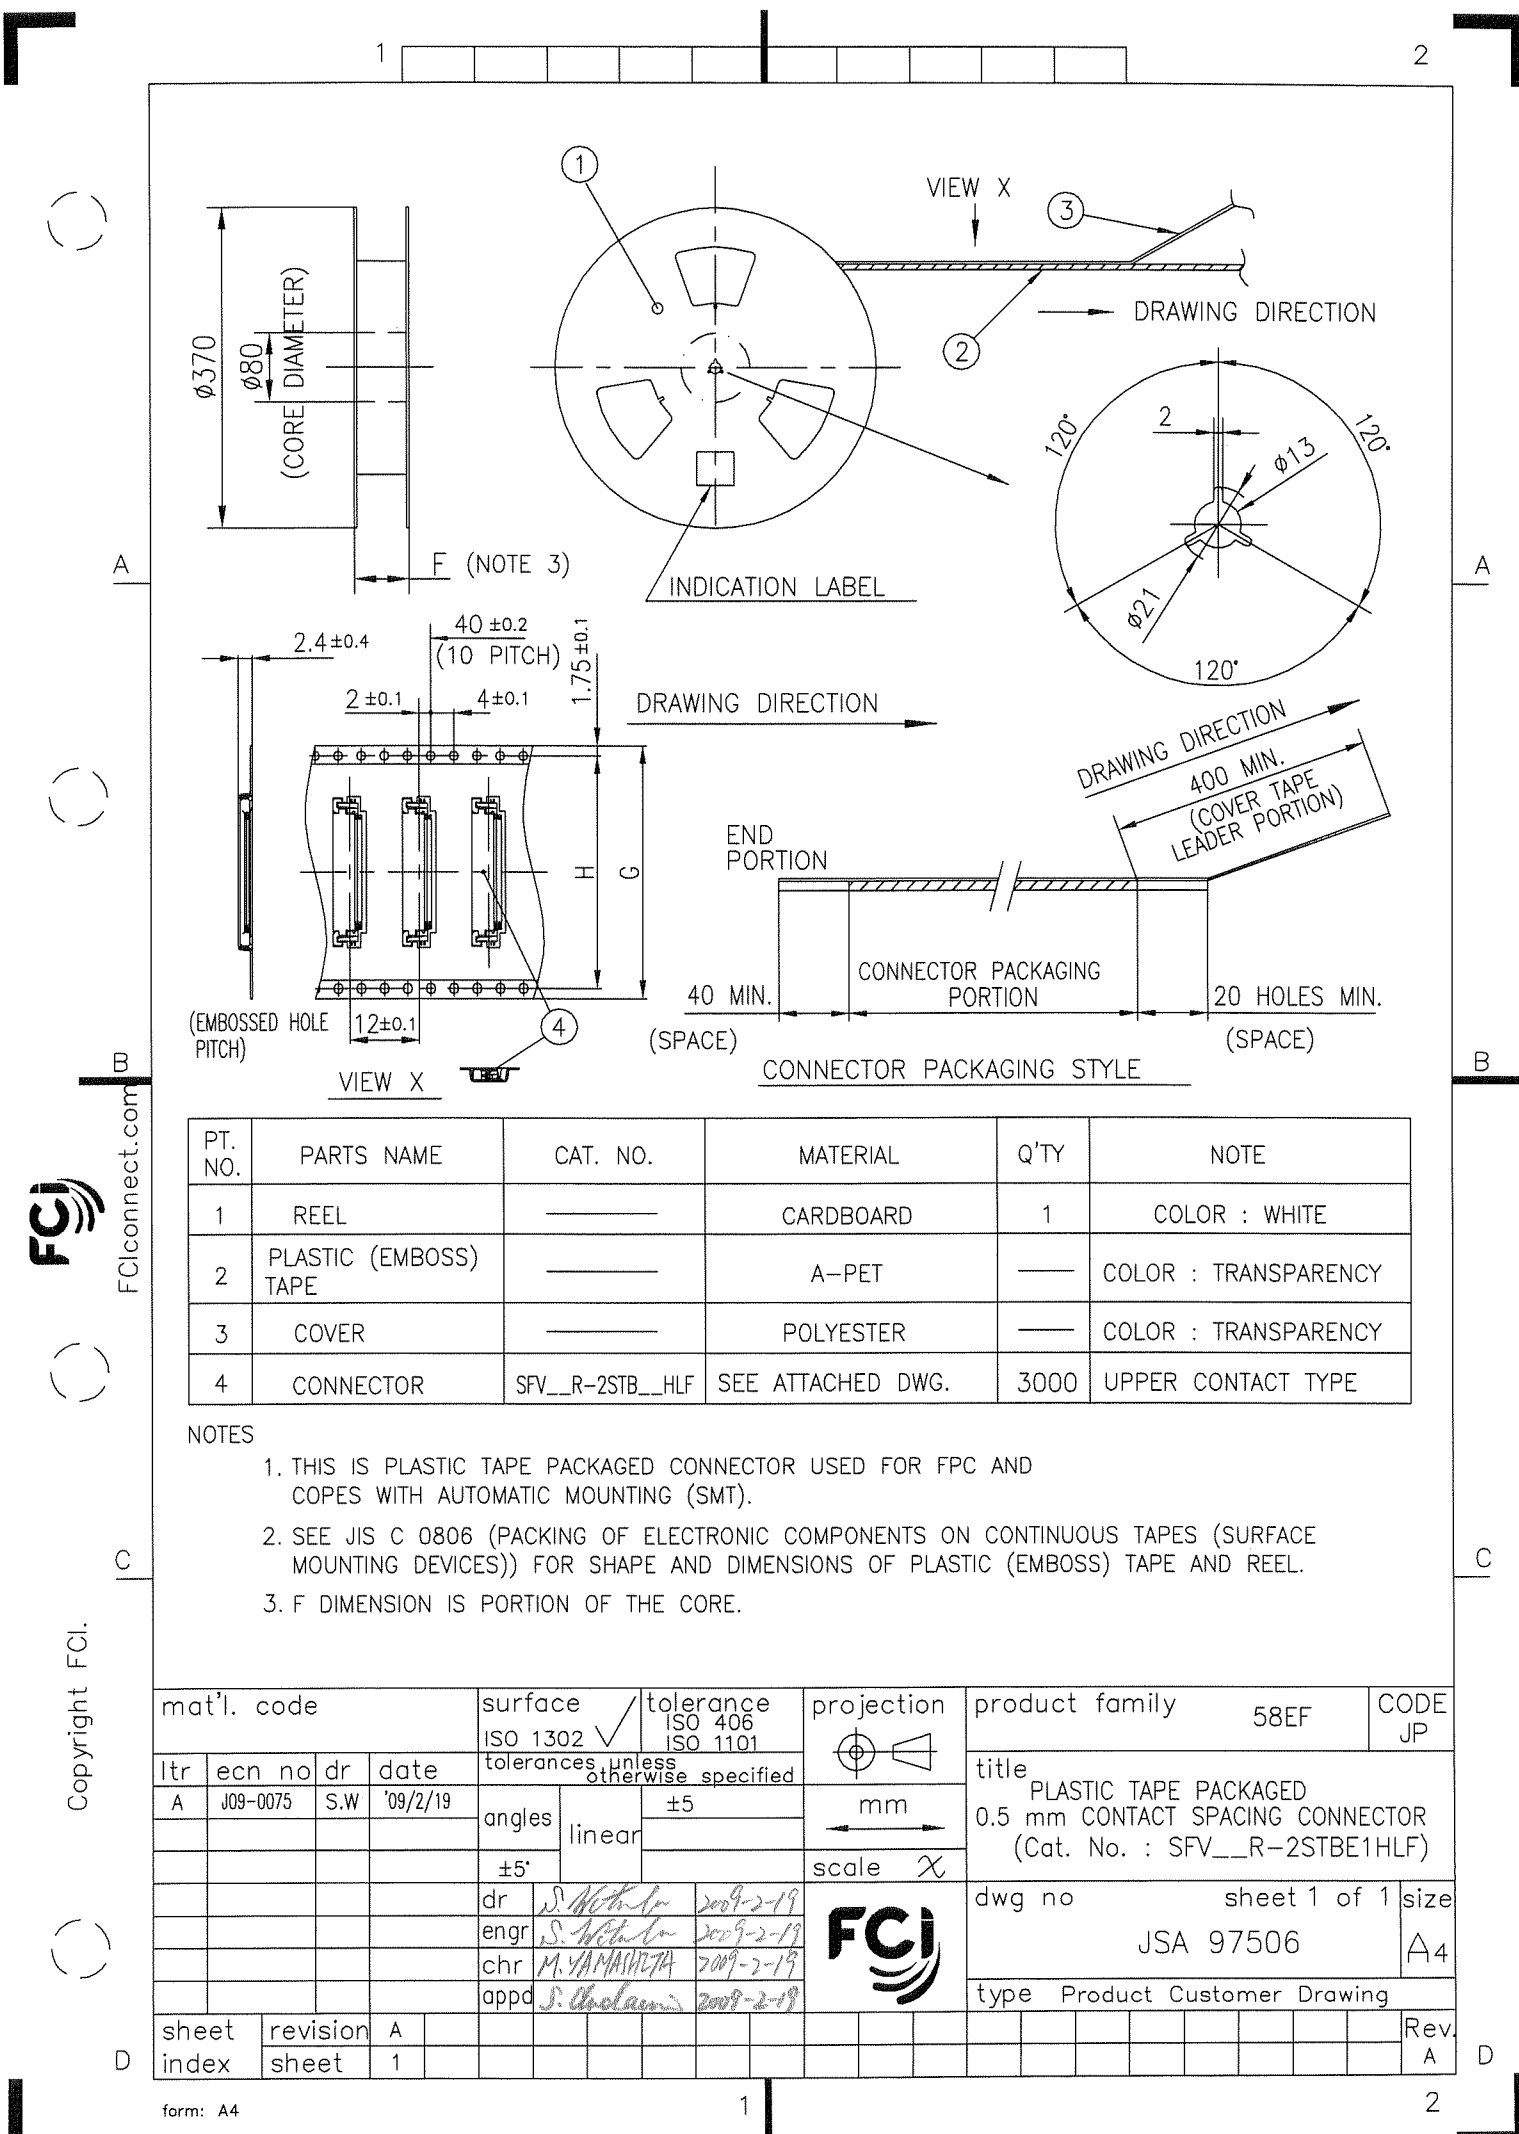

| PT. NO. | PARTS NAME            | CAT. NO.         | MATERIAL          | Q'TY | NOTE                 |
|---------|-----------------------|------------------|-------------------|------|----------------------|
| 1       | REEL                  |                  | CARDBOARD         | 1    | COLOR : WHITE        |
| 2       | PLASTIC (EMBOSS) TAPE |                  | A-PET             |      | COLOR : TRANSPARENCY |
| 3       | COVER                 |                  | POLYESTER         |      | COLOR : TRANSPARENCY |
| 4       | CONNECTOR             | SFV__R-2STB__HLF | SEE ATTACHED DWG. | 3000 | UPPER CONTACT TYPE   |

NOTES

1. THIS IS PLASTIC TAPE PACKAGED CONNECTOR USED FOR FPC AND COPEs WITH AUTOMATIC MOUNTING (SMT).
2. SEE JIS C 0806 (PACKING OF ELECTRONIC COMPONENTS ON CONTINUOUS TAPES (SURFACE MOUNTING DEVICES)) FOR SHAPE AND DIMENSIONS OF PLASTIC (EMBOSS) TAPE AND REEL.
3. F DIMENSION IS PORTION OF THE CORE.

|             |          |     |          |                                        |                                  |                |                                                                                                     |            |
|-------------|----------|-----|----------|----------------------------------------|----------------------------------|----------------|-----------------------------------------------------------------------------------------------------|------------|
| mat'l. code |          |     |          | surface<br>ISO 1302 ✓                  | tolerance<br>ISO 406<br>ISO 1101 | projection<br> | product family<br>58EF                                                                              | CODE<br>JP |
| ltr         | ecn no   | dr  | date     | tolerances, unless otherwise specified |                                  | mm<br>         | title<br>PLASTIC TAPE PACKAGED<br>0.5 mm CONTACT SPACING CONNECTOR<br>(Cat. No. : SFV__R-2STBE1HLF) |            |
| A           | J09-0075 | S.W | '09/2/19 | angles                                 | linear                           |                |                                                                                                     |            |
|             |          |     |          | ±5°                                    |                                  | scale          | dwg no<br>JSA 97506                                                                                 |            |
|             |          |     |          | dr                                     | engr                             |                |                                                                                                     |            |
|             |          |     |          | chr                                    | appd                             |                | sheet 1 of 1<br>size<br>A4                                                                          |            |
|             |          |     |          |                                        |                                  |                |                                                                                                     |            |
| sheet index | revision | A   |          |                                        |                                  |                | type<br>Product Customer Drawing                                                                    |            |
|             | sheet    | 1   |          |                                        |                                  |                |                                                                                                     |            |
|             |          |     |          |                                        |                                  |                | Rev.<br>A                                                                                           |            |
|             |          |     |          |                                        |                                  |                |                                                                                                     |            |

## n : NO. OF CONTACTS

NOTES


1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

[illegible]



# RECOMMENDED CABLE (FFC)

n : NO. OF CONTACTS

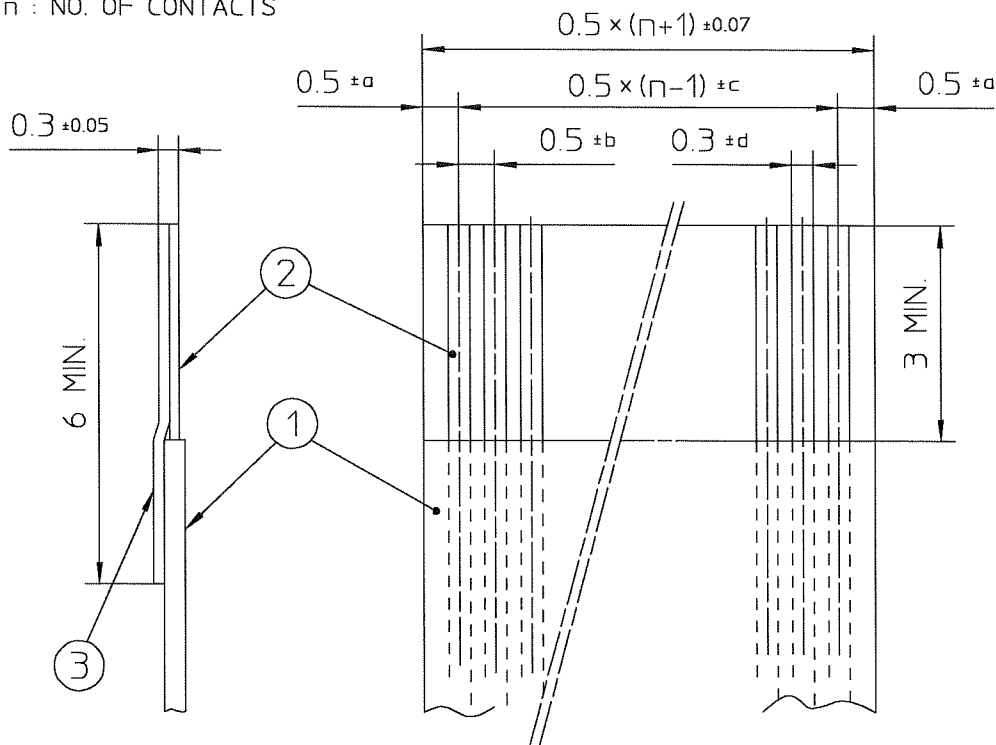

| KIND OF FFC (NOTE3) | DIMENSIONAL TOLERANCE |       |       |        |
|---------------------|-----------------------|-------|-------|--------|
|                     | a                     | b     | c     | d      |
| 1                   | ±0.07                 | ±0.04 | ±0.05 | ±0.02  |
| 2                   | ±0.1                  | ±0.03 | ±0.03 | ±0.025 |

| PT. NO. | PARTS NAME      | MATERIAL                           |
|---------|-----------------|------------------------------------|
| 1       | INSULATOR       | FLAME RESISTING POLYESTER OR EQUAL |
| 2       | CONDUCTOR       | COPPER FOIL (PLATING : GOLD)       |
| 3       | SUPPORTING TAPE | FLAME RESISTING POLYESTER OR EQUAL |

## NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. EITHER KIND1 OR KIND2 OF FFC CAN ACCEPT DIMENSIONAL TOLERANCE a,b,c AND d.

|             |                |     |          |                                                                                                                                                                       |          |                 |                               |                                                  |              |      |  |
|-------------|----------------|-----|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-----------------|-------------------------------|--------------------------------------------------|--------------|------|--|
| mat'l. code |                |     |          | surface <input checked="" type="checkbox"/> ISO 1302 <input type="checkbox"/> tolerance <input checked="" type="checkbox"/> ISO 406 <input type="checkbox"/> ISO 1101 |          | projection      |                               | product family 58EF                              |              |      |  |
| ltr         | ecn no         | dr  | date     | tolerances unless otherwise specified                                                                                                                                 |          |                 |                               | title                                            |              |      |  |
| A           | J06-0499       | H.T | 11/27/06 |                                                                                                                                                                       |          |                 |                               | RECOMMENDED CABLE<br>(Cat. No. : SFV__R-1/2ST__) |              |      |  |
|             |                |     |          | angles                                                                                                                                                                | linear   | scale $\propto$ |                               |                                                  |              |      |  |
|             |                |     |          | dr                                                                                                                                                                    | 11/07/06 |                 | dwg no                        |                                                  | sheet 1 of 1 | size |  |
|             |                |     |          | engr                                                                                                                                                                  | 11/07/06 |                 | JSA 97202                     |                                                  | A4           |      |  |
|             |                |     |          | chr                                                                                                                                                                   | 11/27/06 |                 | type Product Customer Drawing |                                                  |              |      |  |
|             |                |     |          | appd                                                                                                                                                                  | 11/28/06 |                 |                               |                                                  |              |      |  |
| sheet index | revision sheet | A   | 1        |                                                                                                                                                                       |          |                 |                               |                                                  |              |      |  |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9