

| Part*<br>Number | DESC Drawing<br>Number | Relay Description                                       |
|-----------------|------------------------|---------------------------------------------------------|
| CD00CFW         |                        | Basic Solid-State Relay (SSR)                           |
| CD00CFY         | 90091-008              |                                                         |
| CD01CFW         |                        | SSR with Control Status                                 |
| CD01CFY         | 90091-006              |                                                         |
| CD20CDW         |                        | SSR with Short-Circuit Protection                       |
| CD20CDY         | 90091-004              |                                                         |
| CD21CDW         |                        | SSR with Short-Circuit Protection<br>and Control Status |
| CD21CDY         | 90091-002              |                                                         |

\* The Y suffix denotes parameters tested to MIL-PRF-28750 specifications.  
The W suffix denotes parameters tested to Teledyne specifications.  
For surface mount (SMT), add "S" prefix to part number. Example:  
SCD00CFW

## ELECTRICAL SPECIFICATIONS

(-55°C TO +105°C UNLESS OTHERWISE NOTED)

### INPUT (CONTROL) SPECIFICATION

When used in 2 terminal configuration

| (TTL or direct control) (See Fig. 1)          | Min | Typ | Max | Units |
|-----------------------------------------------|-----|-----|-----|-------|
| Input Current @ $V_{IN} = 5$ Vdc (See Fig. 2) |     | 14  | 15  | mA    |
| Turn-Off Voltage (Guaranteed Off)             |     |     | 1.5 | Vdc   |
| Turn-On Voltage (Guaranteed On)               | 3.8 |     |     | Vdc   |
| Reverse Voltage Protection                    |     |     | -32 | Vdc   |
| Input Supply Range (See Note 4)               | 3.8 |     | 6   | Vdc   |

### INPUT (CONTROL) SPECIFICATION

When used in 3 terminal configuration

| (CMOS or open collector TTL) (See Fig. 1) | Min | Typ | Max | Units   |
|-------------------------------------------|-----|-----|-----|---------|
| Control Current                           |     |     |     |         |
| $V_{CONTROL} = 5$ Vdc                     |     |     | 250 | $\mu$ A |
| $V_{CONTROL} = 18$ Vdc                    |     |     | 1   | mA      |
| Control Voltage Range                     | 0   |     | 18  | Vdc     |
| Bias Supply Voltage (See Note 4)          | 3.8 |     | 6   | Vdc     |
| Bias Supply Current @ $V_{BIAS} = 5$ Vdc  |     | 14  | 15  | mA      |
| Turn-Off Voltage (Guaranteed Off)         | 3.2 |     |     | Vdc     |
| Turn-On Voltage (Guaranteed On)           |     |     | 0.3 | Vdc     |

## FEATURES

- Available with short circuit/current overload protection
- Available with input status monitor
- TTL and CMOS compatible control
- Low ON resistance power FET output
- Fast switching speed
- Meets 28 Vdc system requirements of MIL-STD-704
- Optical isolation
- Low profile hermetic ceramic package
- Built and tested to the requirements of MIL-PRF-28750

## DESCRIPTION

This all solid-state relay utilizes the latest technology to provide a low ON resistance. The control (input) and load (output) are optically isolated to protect input logic circuits from voltage and current transients which can occur on the output supply. The optical isolation also provides a full floating output, thus allowing the load to be connected to either output terminal. The control circuit is buffered to enable the relay to be driven directly from standard CMOS or open collector TTL logic circuits. Available options include short circuit and current overload protection, which provides complete protection for both the relay and the system wiring. This feature not only provides protection should a short or overload occur while the relay is on, but will also provide protection should the relay be switched into a short. In either case, the relay will sense the short circuit condition and then block it indefinitely until the short is removed and the unit is reset by cycling the input control. The second option is a status output, which provides a built-in-test function. This feature checks the input circuitry of the relay and provides a logic (0) low when the input circuit is turned on and operational. Both options are available either together or separately as standard features.

# OUTPUT (LOAD) SPECIFICATIONS

(See Note 2) Min Typ Max Units

Continuous Load Current (See Fig. 3)

|        |     |     |
|--------|-----|-----|
| CD20CD | 1.0 | Adc |
| CD21CD | 1.0 | Adc |
| CD00CF | 2.0 | Adc |
| CD01CF | 2.0 | Adc |

Leakage Current @  $V_{LOAD} = 60$  Vdc 40  $\mu$ Adc

Output Voltage Drop

|        |      |     |
|--------|------|-----|
| CD20CD | 0.6  | Vdc |
| CD21CD | 0.6  | Vdc |
| CD00CF | 0.75 | Vdc |
| CD01CF | 0.75 | Vdc |

Continuous Operating Load Voltage 60 Vdc

Transient Blocking Voltage (See Note 3) 80 Vdc

ON Resistance  $R_{ds}$  (on) at  $T_J = 25^\circ\text{C}$   $I_{LOAD} = 100$  mAdc (See Fig. 4)

|        |      |      |     |
|--------|------|------|-----|
| CD20CD | 0.36 | 0.45 | Ohm |
| CD21CD | 0.36 | 0.45 | Ohm |
| CD00CF | 0.16 | 0.22 | Ohm |
| CD01CF | 0.16 | 0.22 | Ohm |

Turn-On Time (See Fig. 5) 1.5 ms

Turn-Off Time (See Fig. 5) 0.25 ms

Electrical System Spike  $\pm 600$  Vdc

Output Capacitance at 25 Vdc, 100 KHz 475 pF

Input to Output Capacitance 10 pF

Dielectric Strength 1000 Vac

Insulation Resistance @ 500 Vdc  $10^9$  Ohm

Maximum Junction Temperature ( $T_J$  Max)

|      |     |                  |
|------|-----|------------------|
| CD00 | 150 | $^\circ\text{C}$ |
| CD01 | 150 | $^\circ\text{C}$ |

Thermal Resistance Junction to Ambient ( $\theta_{JA}$ ) 80  $^\circ\text{C/W}$

Thermal Resistance Junction to Case ( $\theta_{JC}$ ) 20  $^\circ\text{C/W}$

# STATUS OUTPUT SPECIFICATIONS



(CD01CF AND CD21CD) Min Typ Max Units

Status Supply Voltage (See Note 7) 30 Vdc


Status Leakage Current @ 15 Vdc 4  $\mu$ Adc

Status (sink) Current ( $V_{SO} < 0.3$  Vdc) 2 mAdc


# BLOCK DIAGRAM (BOTTOM VIEW)

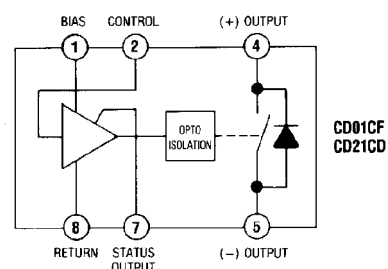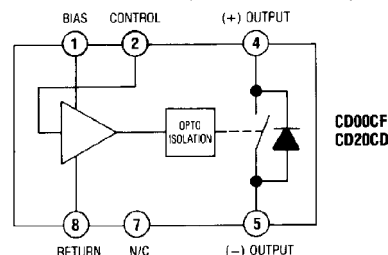

# MECHANICAL SPECIFICATIONS

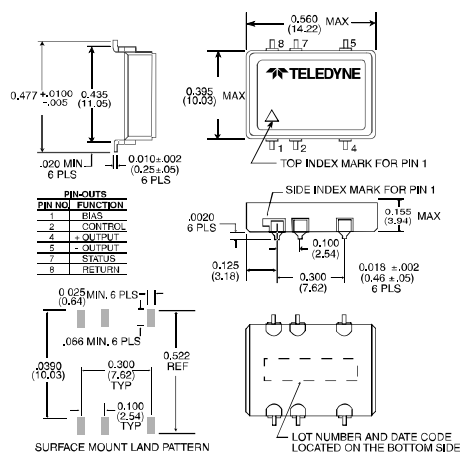

# SCD SERIES OUTLINE

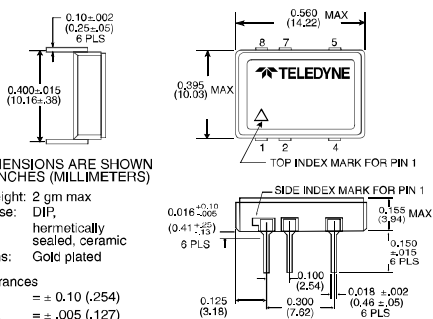

# CD SERIES OUTLINE

## SHORT CIRCUIT SPECIFICATIONS

| (CD20CD AND CD21CD)                   | Min | Typ | Max | Units |
|---------------------------------------|-----|-----|-----|-------|
| Surge Current (See Fig. 7 and Note 6) |     | 2.4 |     | Adc   |


## ENVIRONMENTAL SPECIFICATIONS

|                       | Min | Typ | Max  | Units |
|-----------------------|-----|-----|------|-------|
| Temperature Range     |     |     |      |       |
| Operating             | -55 |     | +105 | °C    |
| Storage               | -55 |     | +125 | °C    |
| Vibration, 100 g      | 10  |     | 3000 | Hz    |
| Constant Acceleration |     |     | 5000 | g     |
| Shock, 0.5 ms         |     |     | 1500 | g     |


**TABLE 1: STATUS OUTPUT TRUTH TABLE**

(CD01CF AND CD21CD)


| Control Voltage | Output Status | Status Output Level              |
|-----------------|---------------|----------------------------------|
| High            | Off           | High ( $V_{SO} = V_{STATUS}$ )   |
| Low             | On            | Low ( $V_{SO} \leq 0.3 V_{dc}$ ) |

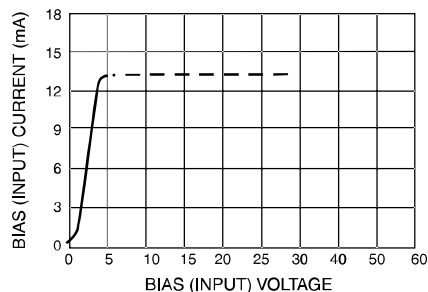


**INPUT CURRENT VS VOLTAGE  
FIGURE 2 (SEE NOTE 4)**

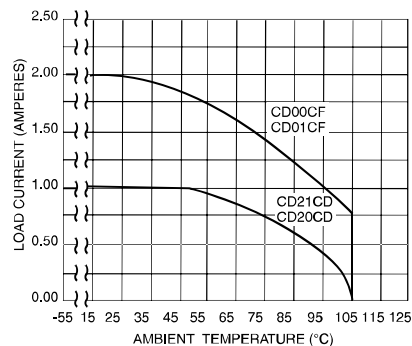


**LOAD CURRENT DERATING CURVE  
FIGURE 3**

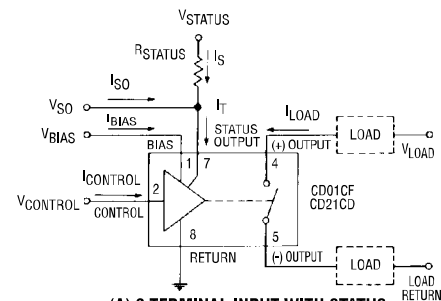


**(A) 3 TERMINAL INPUT WITH STATUS  
(See Note 7)**

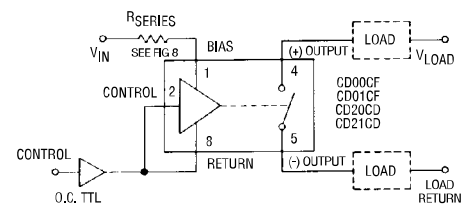

**(B) 2 TERMINAL INPUT (OPEN COLLECTOR TTL DRIVE)**

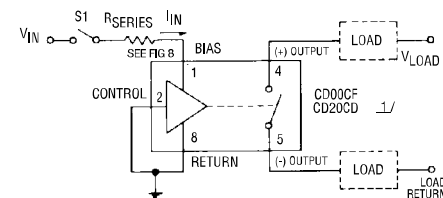


**(C) 2 TERMINAL INPUT (DIRECT DRIVE)**

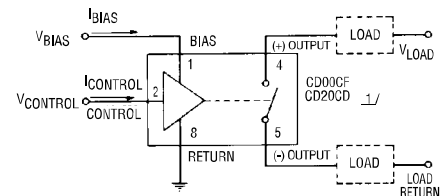


**(D) 3 TERMINAL INPUT WITHOUT STATUS**

1/ CD21CD AND CD01CF MAY BE WIRED WITHOUT THE STATUS LINE AS SHOWN IN (C) AND (D)


## WIRING CONFIGURATIONS FIGURE 1 (SEE NOTE 8)

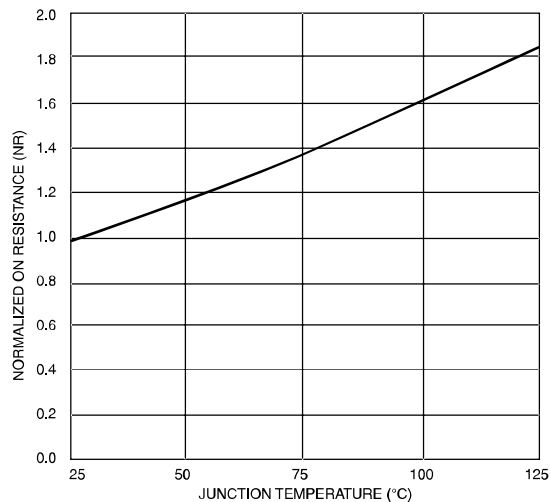


**NORMALIZED ON RESISTANCE VS JUNCTION TEMPERATURE**  
FIGURE 4 (SEE NOTE 5)

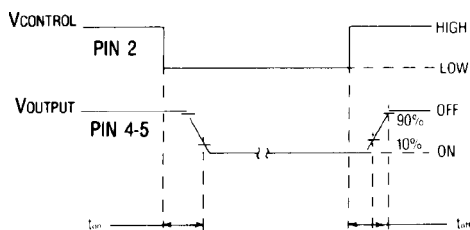

**OUTPUT TURN-ON AND TURN-OFF TIMING**  
FIGURE 5

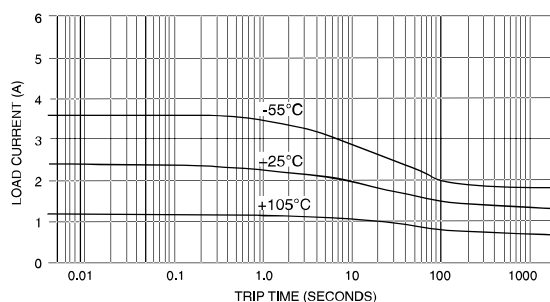

**TRIP CURRENT VS TIME**  
FIGURE 7 (SEE NOTE 6)

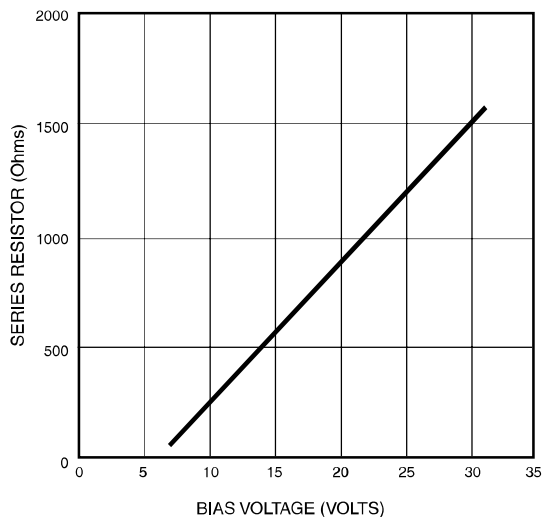

**SERIES LIMIT BIAS RESISTOR VS BIAS VOLTAGE**  
FIGURE 8 (SEE NOTE 4)

#### NOTES:

- Control input is compatible with CMOS or open collector TTL (with pull up resistor).
- The rated input voltage is 5V for all tests unless otherwise specified.
- Transient blocking voltage tests are performed per MIL-STD-704 (28 Vdc systems).
- For bias voltages above 6V, a series resistor is required. Use the standard resistor value equal to or less than the value found from Figure 8.
- To calculate the maximum ON resistance for a given junction temperature, find the normalized ON resistance factor (NR) from Figure 4. Calculate the new ON resistance as follows:  
 (CD00CD, CD01CD)  $R_{(ON)} = NR \cdot R_{ON} @ 25^{\circ}C$   
 (CD20CD, CD21CD)  $R_{(ON)} = 0.2 \cdot NR + 0.21$
- Overload testing to the requirements of MIL-PRF-28750 is constrained to the limits imposed by the short circuit protection characteristics as defined in this specification. System series inductance for "shorted-load" mode of operation should be 30  $\mu H$  maximum. Maximum repetition rate into a shorted load should not exceed 10 Hz.
- A status pull up resistor is required for proper operation of the status output. Determine the current (Iso) required by the status interface. Calculate the current (Is) through the status resistor such that the sink current through the status output is 2 mA. Select the status resistor such that it does not allow more than 2 mA to flow through the status output.  

$$R_{STATUS} = \frac{V_{STATUS} - 0.3V}{2 \text{ mA} - I_{so}}$$
- Inductive loads should be diode suppressed. Input transitions should be  $\leq 1$  ms duration and the input drive should be a bounceless contact type.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9