

Type CP16 Series

Type CP16 Series



Specify the type CP16 for applications where high insulation resistance and voltage proof are key requirements. The materials used in the all-plastic body and spindle construction make it an ideal component for domestic appliances and control systems where safety is of prime importance. This popular low cost potentiometer is suitable for industrial and professional applications.

Key Features

- High Reliability
- Small Versatile Size
- All Plastic Body
- Plastic or Metal shaft styles
- Switch Types Available
- Multiple Sections Available
- Flatted, Serrated Shaft Available

Characteristics - Electrical

Resistance Range:	100R to 4M7 Linear, 2K2 to 2M2 Non-Linear
Resistance Values:	1, 2.2 & 4.7 in each decade
Resistance Tolerance:	±20% (>1M ± 30%) - ±10% by selection
Power Rating @ 40°C:	0.2 Watts Linear - 0.1 Watts Non-Linear
Limiting Element Voltage:	250 Volts dc (Linear), 125 Volts dc (Non Linear)
Electrical Rotation:	260° ± 20°
Terminal Resistance:	5 ohms, maximum ≤0.1% (2 ohms, minimum)
Noise (ENR):	≤3% (3 ohms minimum)
Insulation Resistance:	4G ohms, minimum
Resolution:	Essentially Infinite
Voltage Proof:	1KV ac peak

Characteristics - Mechanical

End Torque:	400 mNm maximum
Operating Torque:	5 to 25 mNm maximum
Mechanical Adjustment:	300° ± 5°
Maximum Torque to Nut:	800 mNm

Characteristics - Environmental


Electrical Life:	ΔR± 5% (1000 hours 0.2 Watts @ 40°C)
Mechanical Life:	25,000 operations
Operating Temperature:	-25°C to +70°C
Temperature Coefficient:	± 300ppm/°C (Rn <100K ohms)
Thermal Cycling:	ΔR± 2.5% (16 hours 85°C, 2 hours @ -25°C)
Damp Heat:	ΔR± 5% (500 hours @ 40°C +95% RH)
Vibration:	ΔR± 2% (2 hours @ 20g - 10Hz ~50 Hz)

Switch Specifications


Nominal Current:	1A, 250 VAC
Contact Resistance:	10 milli ohms
Operating Torque:	10 to 30mNm
Operating Angle:	30° ± 5°
Test Voltage:	500 V

Dimensions

CP16SH10IP06*

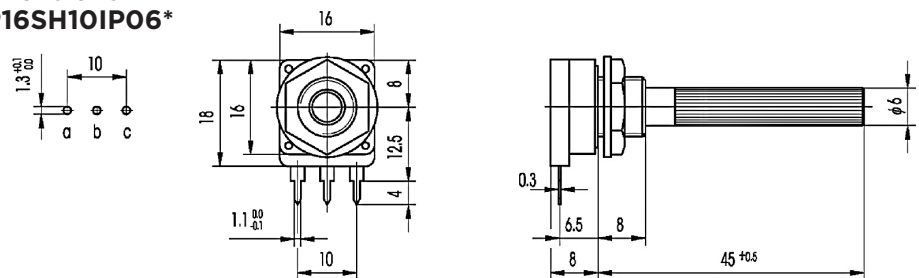




CP16SH10CP06*

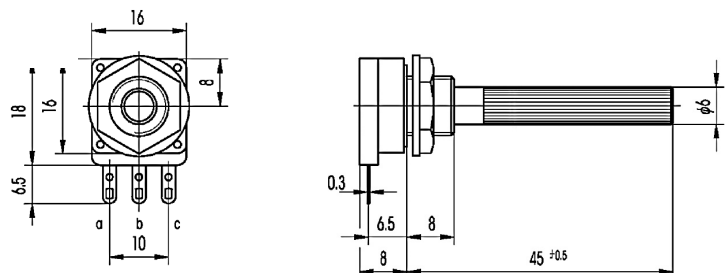




Type CP16 Series

Dimensions




CP16SH10IP6*...I

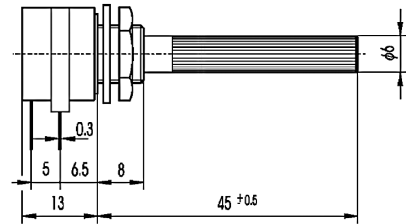

CP16SV10IP6*...

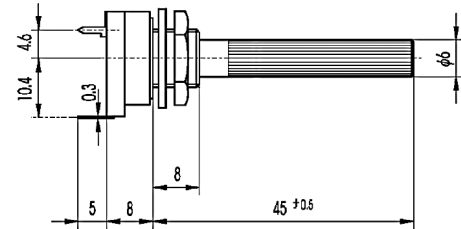


CP16DH10IP6*...I

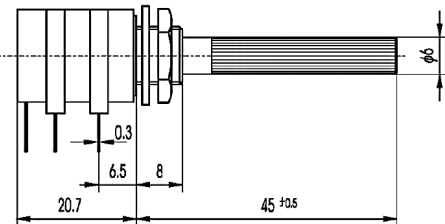


Shaft Styles (Plastic)


R06/R6



P06/P6



F06/F6



How to Order

CP16S	H10	I	P06	102	-	-	-
Common Part	Style / Bush	Terminals	Shaft Type	Resistance Value	Law	Tolerance	Switch
CP16S – Single CP16D – Dual	H10 – Horz. M10 Bush V10 – Vert. M10 Bush	I – PCB C – Eyelet	P06/P6 Standard F06/F6 Flatted 6mm R06/R6 Round 6mm	The first two digits are significant figures of resistance value. The third denotes the number of zeros following. e.g. 100R: 101 1K: 102 10K: 103 100K: 104	-- Linear B – Log C – Inverse Log	-- Standard K – 10%	-- No Switch I – Switched

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[CP16SV10IP06103](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9