

NHD-7.0-800480EF-ATXL#

TFT (Thin-Film-Transistor) Color Liquid Crystal Display Module

| | |
|---------|--------------------------------------|
| NHD- | Newhaven Display |
| 7.0- | 7.0" Diagonal |
| 800480- | 800xRGBx480 Pixels |
| EF- | Model |
| A- | Built-in Driver / No Controller |
| T- | White LED backlight |
| X- | TFT |
| L- | 12:00 Optimal View, Wide Temperature |
| #- | RoHS Compliant |

Newhaven Display International, Inc.

2661 Galvin Ct.

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

www.newhavendisplay.com

nhtech@newhavendisplay.com

nhsales@newhavendisplay.com


Document Revision History

| Revision | Date | Description | Changed by |
|----------|-----------|----------------------------|------------|
| 0 | 8/29/2013 | Initial Release | ML |
| 1 | 2/10/2015 | Mechanical drawing updated | AK |
| 2 | 4/1/2015 | Mechanical drawing updated | AK |

Functions and Features

- 800xRGBx480 resolution
- LED backlight
- 24-bit digital RGB interface
- 16.7M colors

Mechanical Drawing

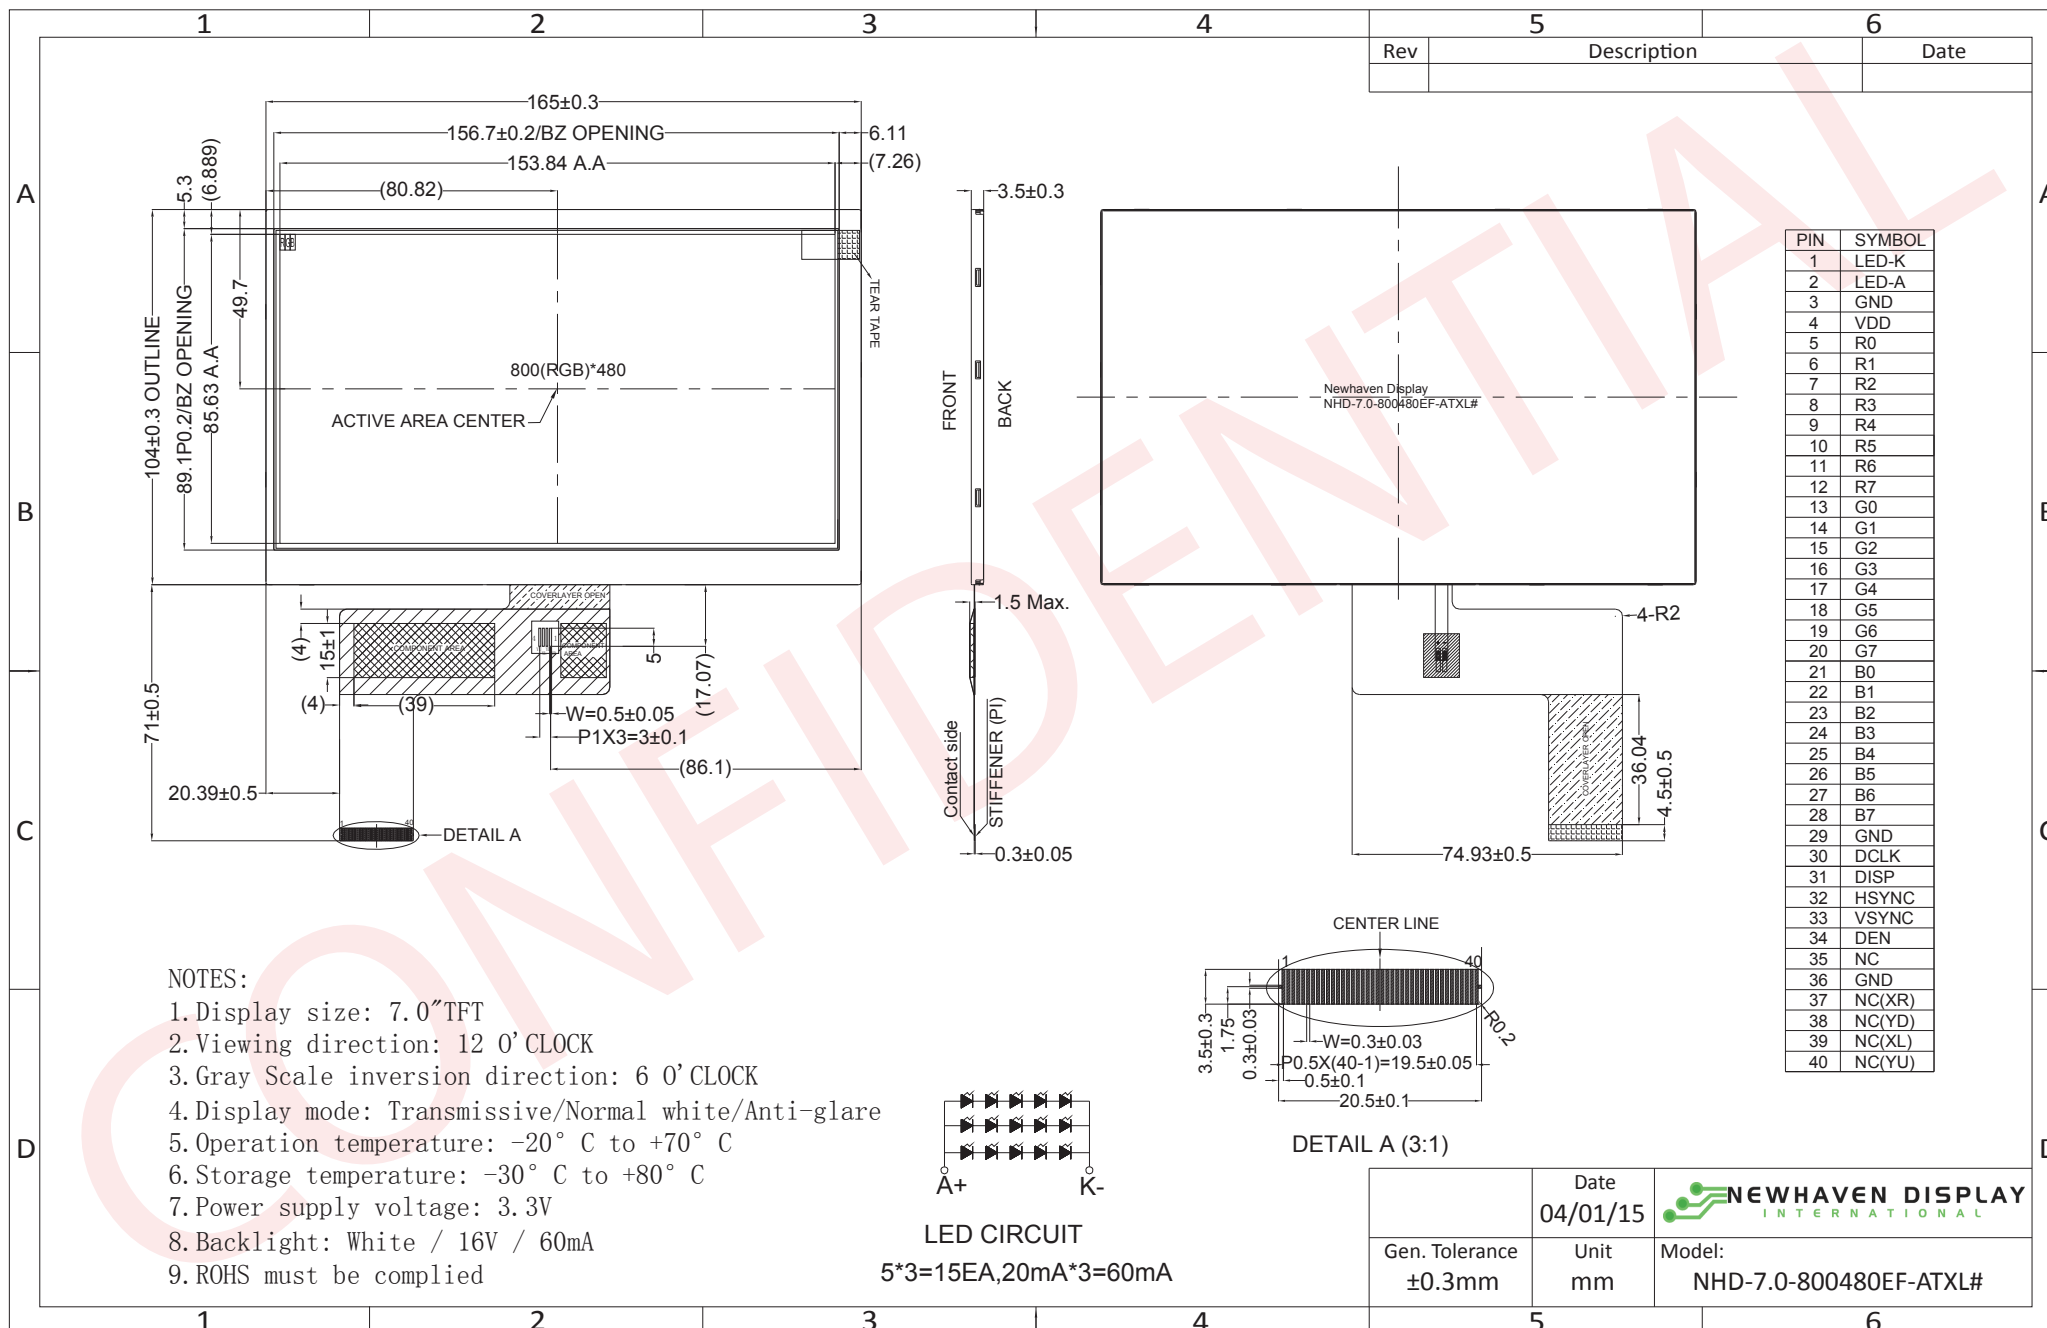

The drawing contained herein is the exclusive property of Newhaven Display International, Inc. and shall not be copied, reproduced, and/or disclosed in any format without permission.

Pin Description

| Pin No. | Symbol | Connection | Function Description |
|---------|---------|--------------|-------------------------------------|
| 1 | LED-K | Power Supply | Ground for Backlight |
| 2 | LED-A | Power Supply | Backlight Power Supply (60mA @ 16V) |
| 3 | GND | Power Supply | Ground |
| 4 | VDD | Power Supply | Power Supply (+3.3V) |
| 5-12 | [R0-R7] | MPU | Red Data Signals |
| 13-20 | [G0-G7] | MPU | Green Data Signals |
| 21-28 | [B0-B7] | MPU | Blue Data Signals |
| 29 | GND | Power Supply | Ground |
| 30 | CLKIN | MPU | Clock for input data |
| 31 | DISP | MPU | Display on/off DISP=1:Display on |
| 32 | HSD | MPU | Line synchronization signal |
| 33 | VSD | MPU | Frame synchronization signal |
| 34 | DEN | MPU | Data Enable signal |
| 35 | NC | - | No Connect |
| 36 | GND | Power Supply | Ground |
| 37 | NC(XR) | - | No Connect |
| 38 | NC(YD) | - | No Connect |
| 39 | NC(XL) | - | No Connect |
| 40 | NC(YU) | - | No Connect |

LCD connector: 0.5mm pitch 40-Conductor FFC. Molex p/n: 54104-4031 (top contact)

Backlight connector: on LCD connector

Mates with: ---

Electrical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------------------------|--------|---------------|---------|------|---------|------|
| Operating Temperature Range | Top | Absolute Max | -20 | - | +70 | °C |
| Storage Temperature Range | Tst | Absolute Max | -30 | - | +80 | °C |
| Supply Voltage | VDD | | 3.0 | 3.3 | 3.6 | V |
| Supply Current | IDD | VDD=3.3V 25°C | 60 | 85 | 120 | mA |
| "H" Level Input | VIH | | 0.7*VDD | - | VDD | V |
| "L" Level Input | VIL | | GND | - | 0.3*VDD | V |
| "H" Level Output | VOH | | VDD-0.4 | - | - | V |
| "L" Level Output | VOL | | - | - | GND+0.4 | V |
| Backlight Supply Voltage | VLED | | 14.5 | 16 | 16.5 | V |
| Backlight Supply Current | ILED | VLED=16V | 45 | 60 | 75 | mA |

Optical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------|--------|-----------|------|------|------|-------------------|
| Viewing Angle – Top | | Cr ≥10 | - | 55 | - | ° |
| Viewing Angle – Bottom | | | - | 65 | - | ° |
| Viewing Angle – Left | | | - | 70 | - | ° |
| Viewing Angle – Right | | | - | 70 | - | ° |
| Contrast Ratio | Cr | - | - | 400 | - | |
| Luminance | L | - | 220 | 280 | - | cd/m ² |
| Response Time | Tr+Tf | - | - | 25 | 35 | ms |

Viewing angles based on 6:00 gray scale inversion

Driver Information

Built-in HX8264-D02 Source Driver: http://www.newhavendisplay.com/app_notes/HX8264-D02.pdf

Built-in HX8664-B Gate Driver: http://www.newhavendisplay.com/app_notes/HX8664-B.pdf

Timing Characteristics

| Parameter | Symbol | Spec. | | | Unit |
|------------------------|-----------|-------|------|------|------|
| | | Min. | Typ. | Max. | |
| HS setup time | T_{hst} | 8 | - | - | ns |
| HS hold time | T_{hhd} | 8 | - | - | ns |
| VS setup time | T_{vst} | 8 | - | - | ns |
| VS hold time | T_{vhd} | 8 | - | - | ns |
| Data setup time | T_{dsu} | 8 | - | - | ns |
| Data hold time | T_{dhd} | 8 | - | - | ns |
| DE setup time | T_{esu} | 8 | - | - | ns |
| DE hold time | T_{ehd} | 8 | - | - | ns |
| VDD Power On Slew rate | T_{POR} | - | - | 20 | ms |
| RSTB pulse width | T_{Rst} | 10 | - | - | us |
| CLKIN cycle time | T_{cph} | 20 | - | - | ns |
| CLKIN pulse duty | T_{cwh} | 40 | 50 | 60 | % |
| Output stable time | T_{sst} | - | - | 6 | us |


Horizontal Timing

| Parameter | Symbol | Spec. | | | Unit |
|--------------------------|--------|-------|------|------|------|
| | | Min. | Typ. | Max. | |
| Horizontal Display Area | thd | 800 | | | DCLK |
| DCLK frequency | fclk | - | 30 | 50 | MHz |
| One Horizontal Line | th | 889 | 928 | 1143 | DCLK |
| HS pulse width | thpw | 1 | 48 | 255 | DCLK |
| HS Back Porch (Blanking) | thb | 88 | | | DCLK |
| HS Front Porch | thfp | 1 | 40 | 255 | DCLK |
| DE mode Blanking | th-thd | 85 | 128 | 512 | DCLK |


Vertical Timing

| Parameter | Symbol | Spec. | | | Unit |
|--------------------------|--------|-------|------|------|-------|
| | | Min. | Typ. | Max. | |
| Vertical Display Area | tvd | 480 | | | T_H |
| VS period time | tv | 513 | 525 | 767 | T_H |
| VS pulse width | tvpw | 3 | 3 | 255 | T_H |
| VS Back Porch (Blanking) | tvb | 32 | | | T_H |
| VS Front Porch | tvfp | 1 | 13 | 255 | T_H |
| DE mode Blanking | tv-tvd | 4 | 45 | 255 | T_H |

Horizontal Timing

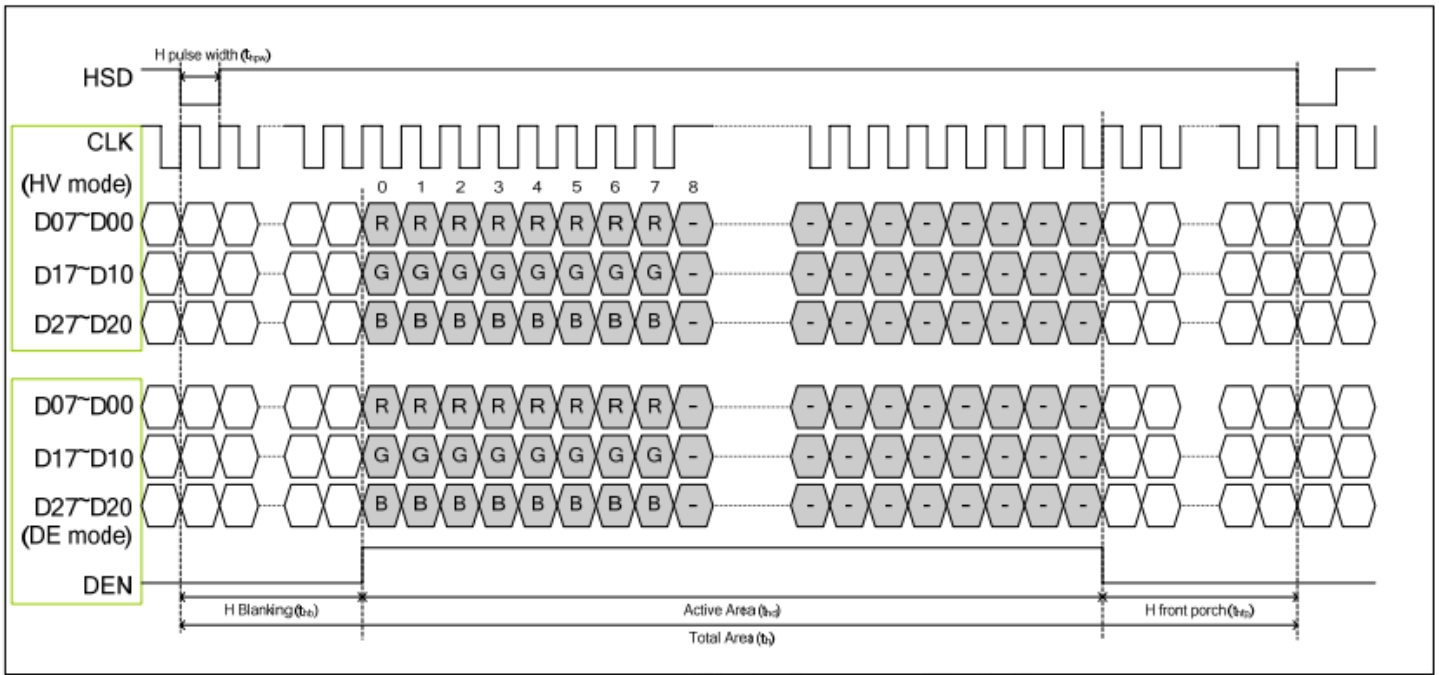


Vertical Timing

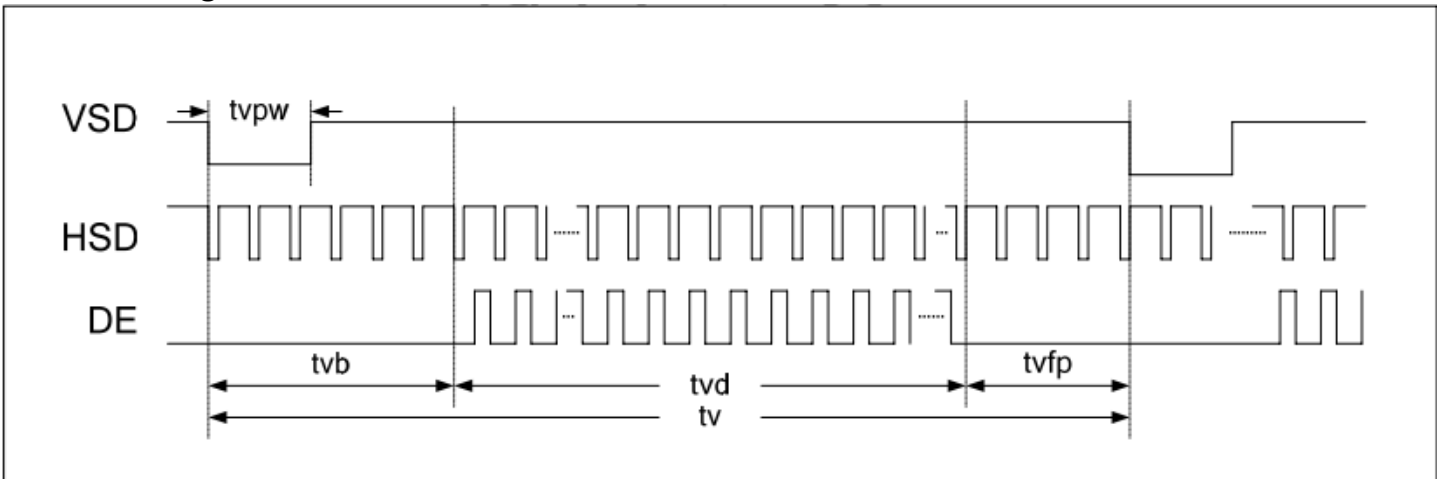


Parallel 24-bit RGB mode

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|--------------------------------|--------|------|------|------|-------|---------------|
| CLKIN Frequency | Fclk | - | 40 | 50 | MHz | VDD=3.0V~3.6V |
| CLKIN Cycle Time | Tclk | 20 | 25 | - | ns | - |
| CLKIN Pulse Duty | Tcwh | 40 | 50 | 60 | % | Tclk |
| Time from HSD to Source Output | Thso | | 64 | | CLKIN | - |
| Time from HSD to LD | Thld | | 64 | | CLKIN | - |
| Time from HSD to STV | Thstv | | 2 | | CLKIN | - |
| Time from HSD to CKV | Thckv | | 20 | | CLKIN | - |
| Time from HSD to OEV | Thoev | | 4 | | CLKIN | - |
| LD Pulse Width | Twld | | 10 | | CLKIN | - |
| CKV Pulse Width | Twckv | | 66 | | CLKIN | - |
| OEV Pulse Width | Twoev | | 74 | | CLKIN | - |


Input Clock and Data Timing

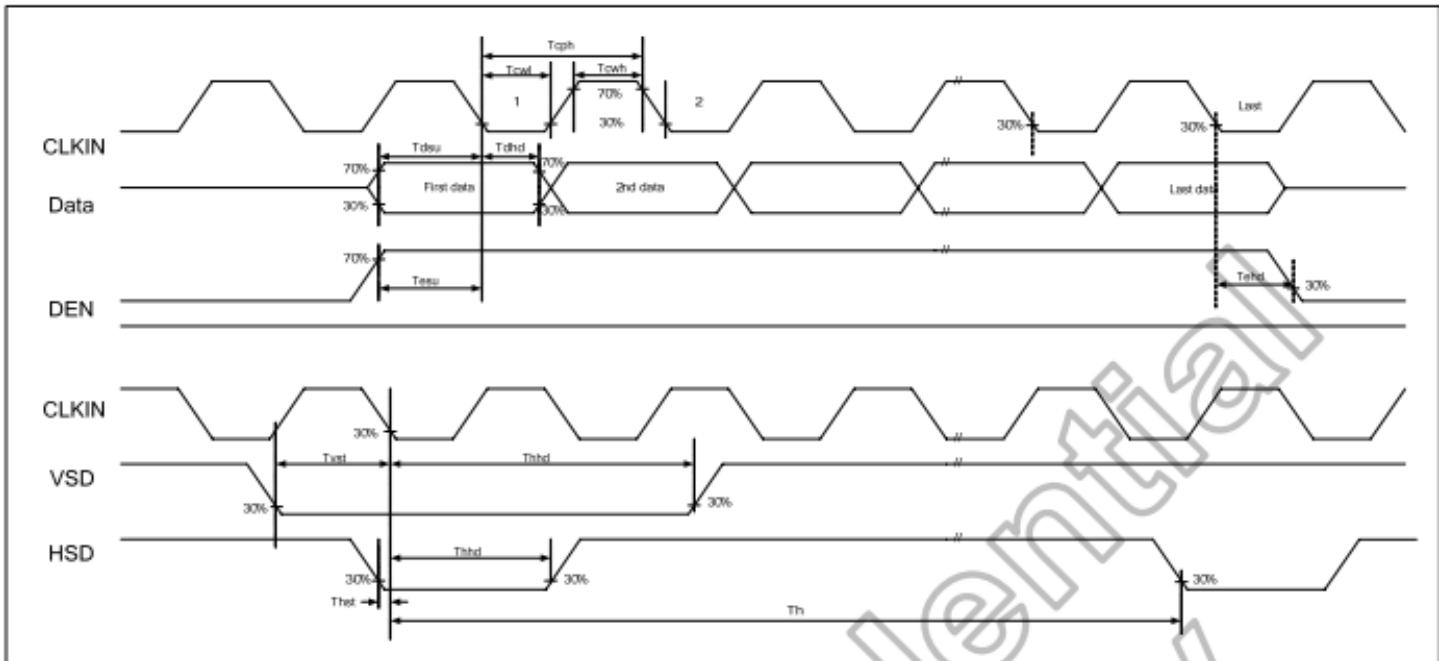


Source Output Timing

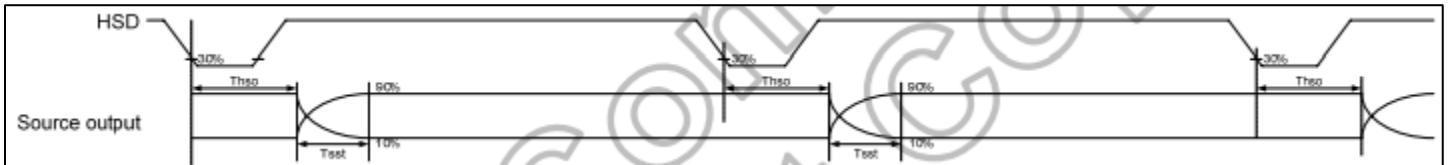


Vertical Timing HV (Cascade)

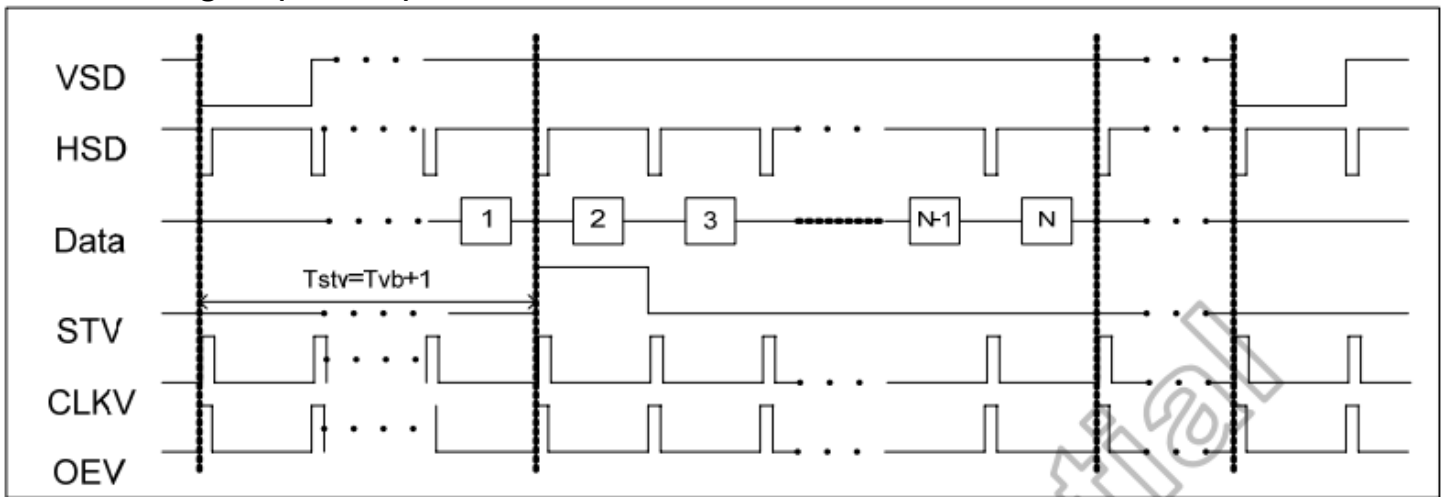


Vertical Timing DE (Cascade)

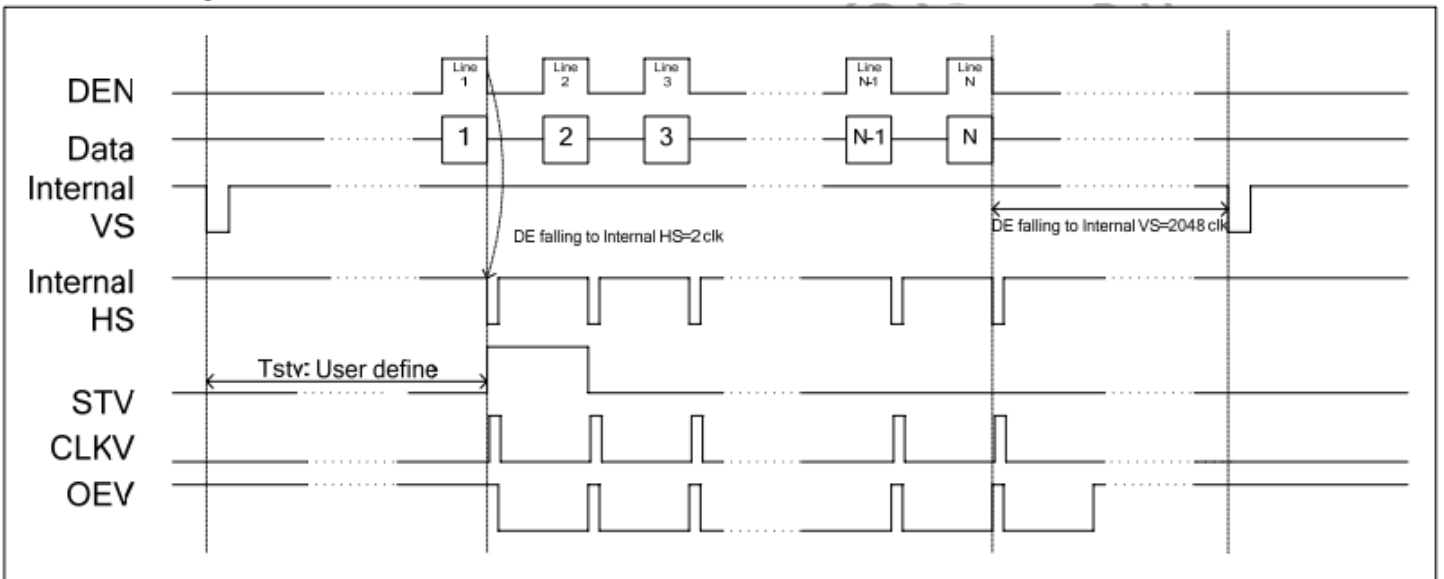


Gate Output Timing (Cascade)

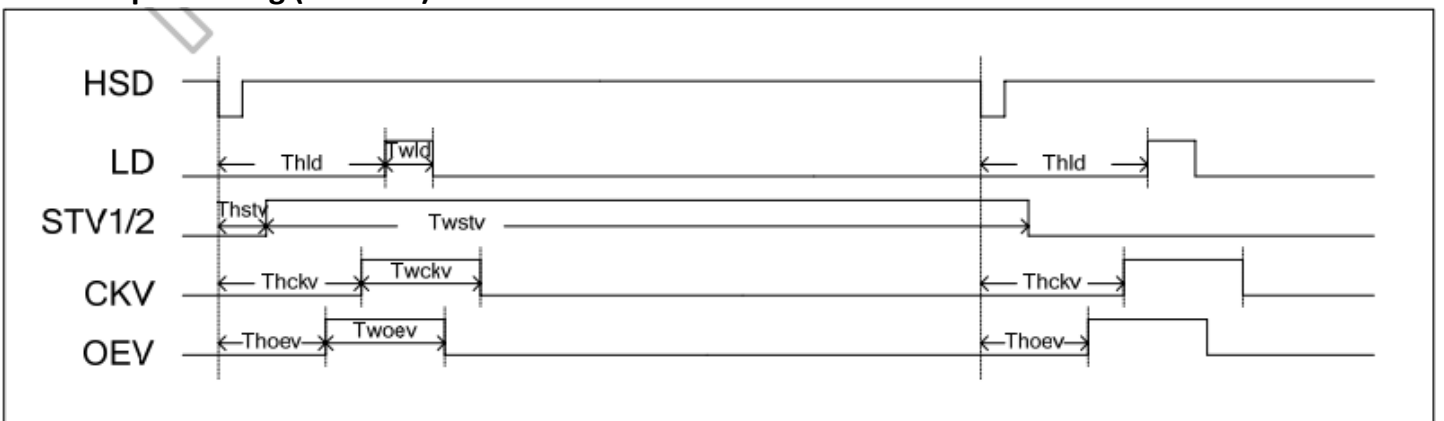


Vertical Timing HV (Dual Gate)

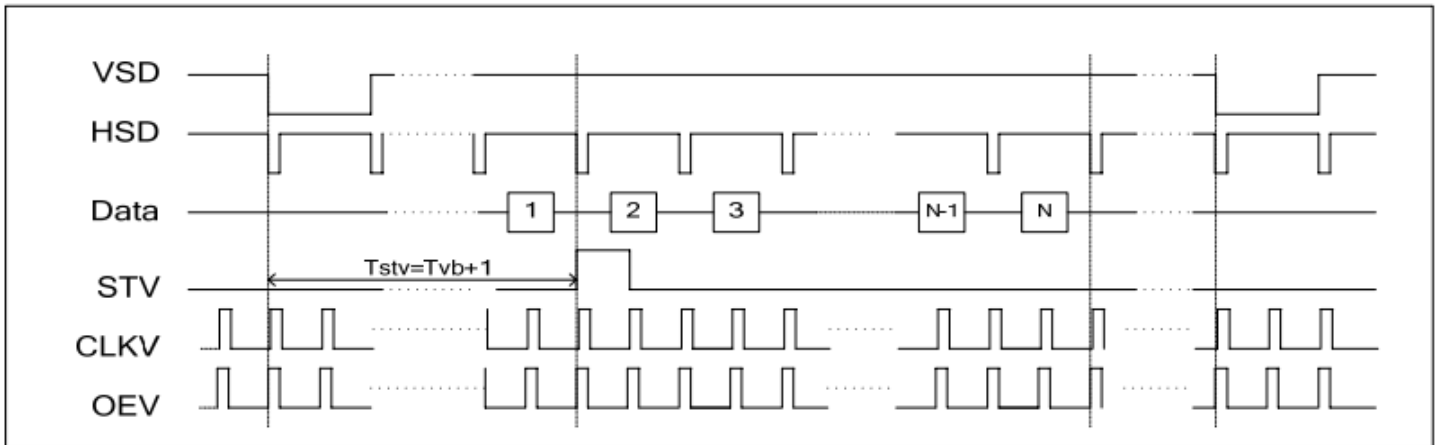


Vertical Timing DE (Dual Gate)

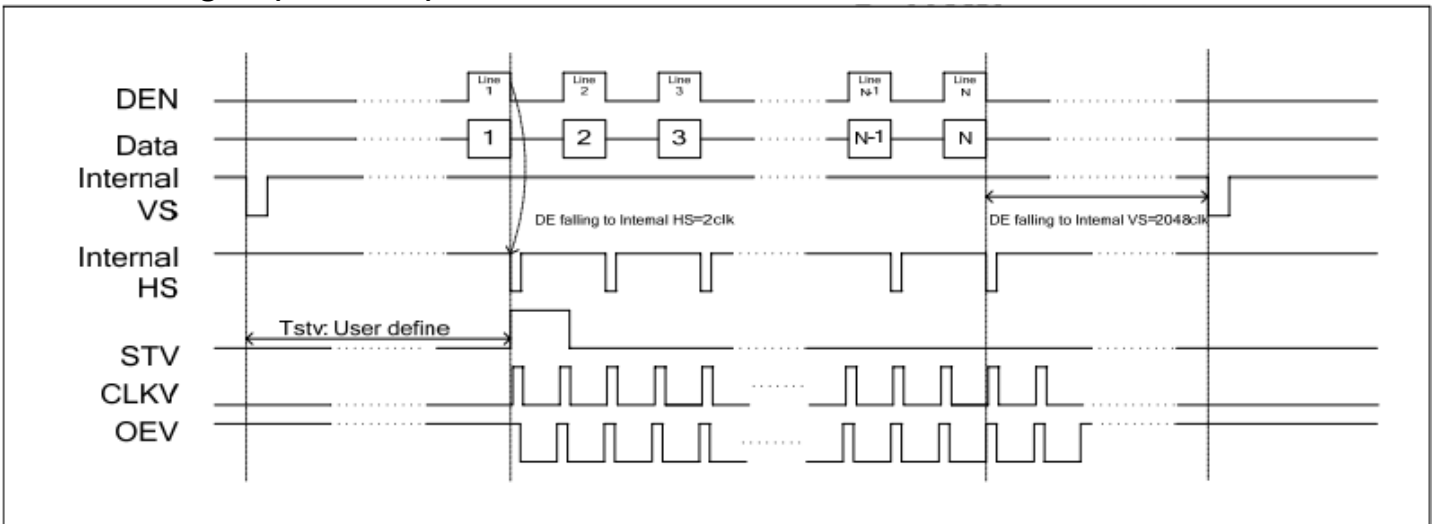


Gate Output Timing (Dual Gate)

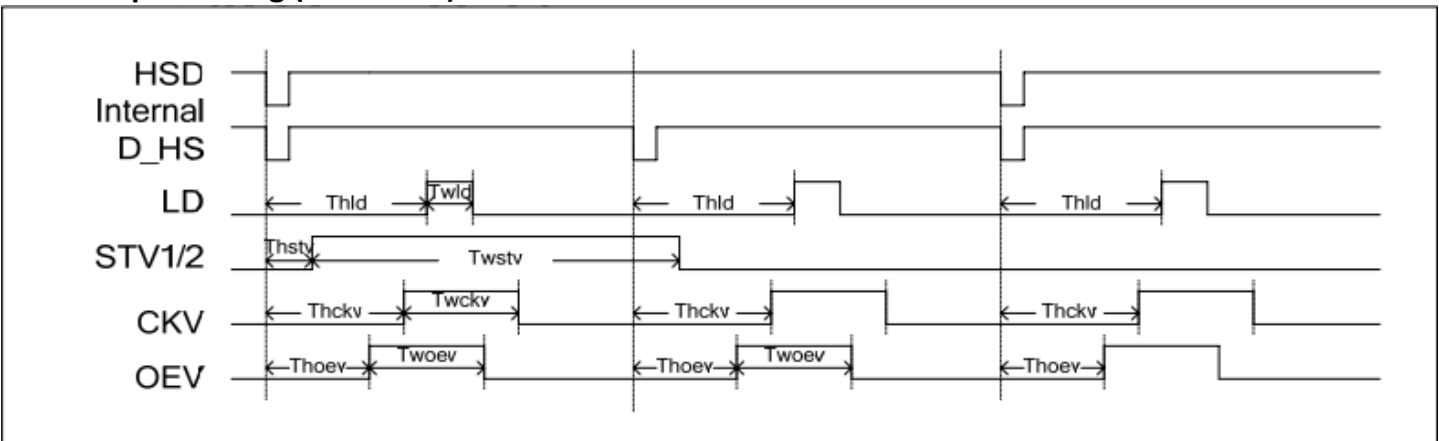

Power ON/OFF Sequence

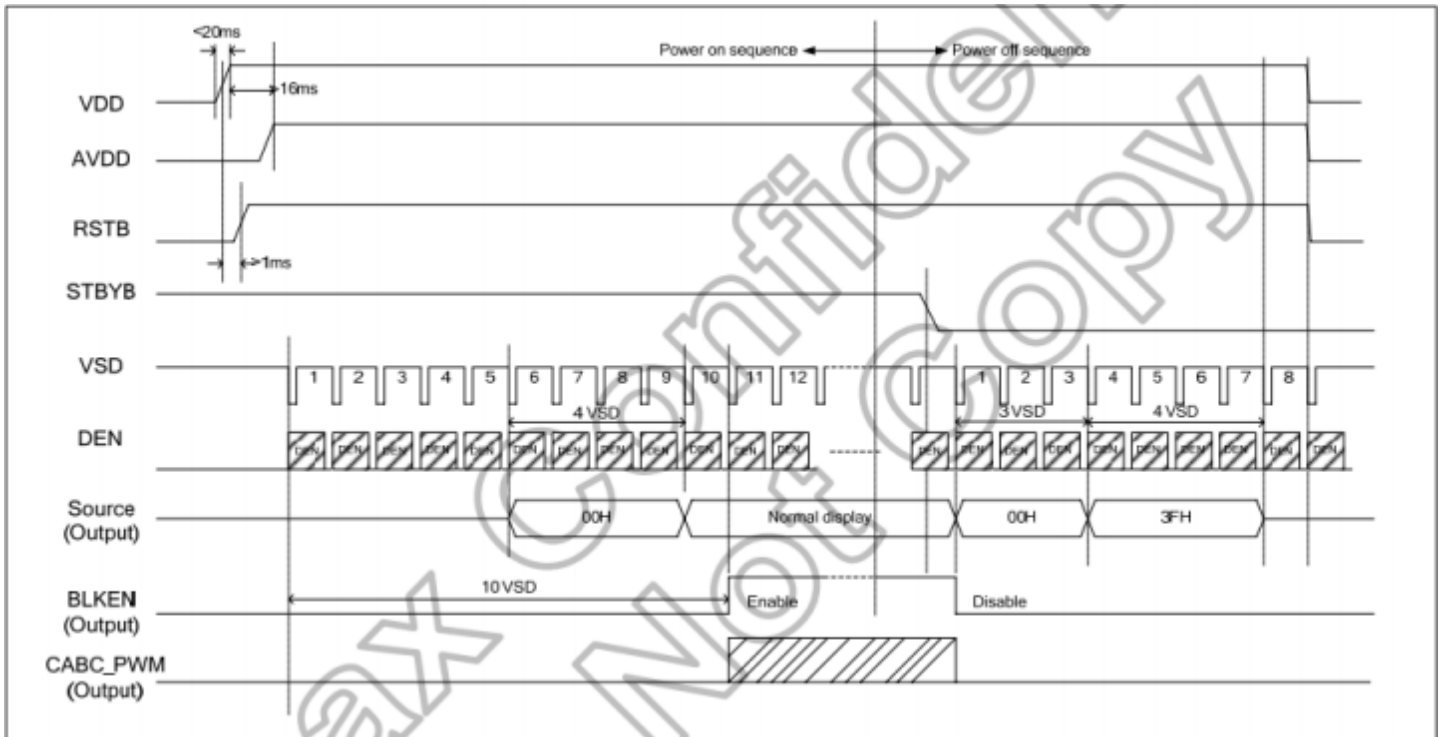

Enter/Exit Standby Mode Sequence

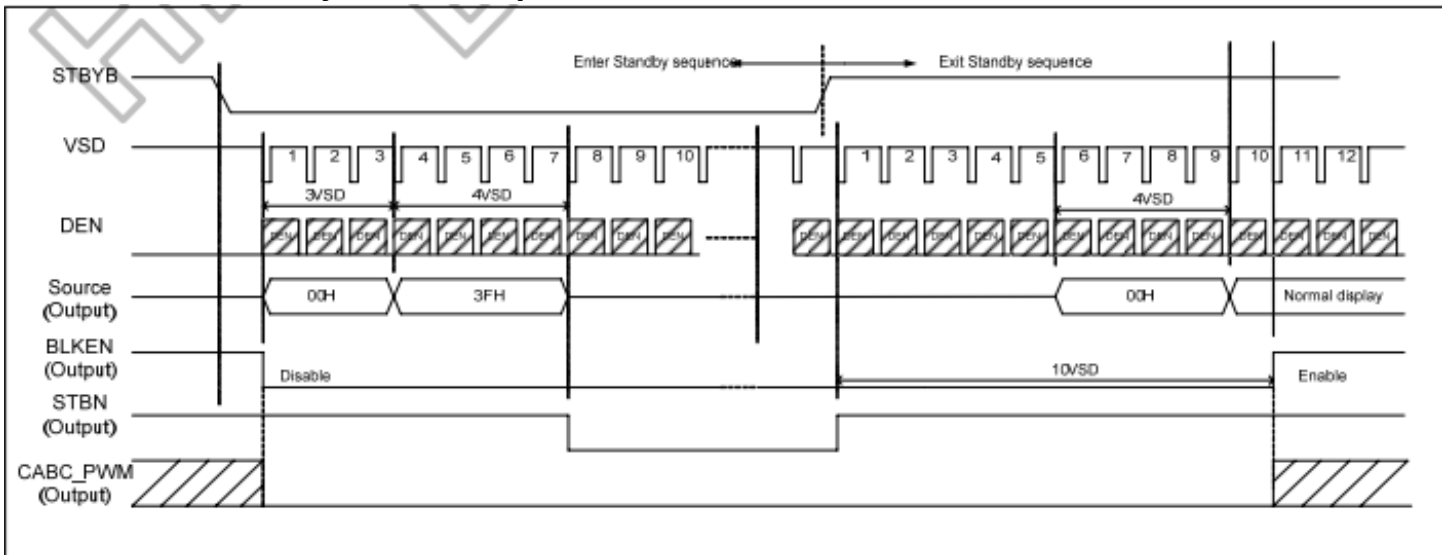

Quality Information

| Test Item | Content of Test | Test Condition | Note |
|---------------------------------------|---|---|------|
| High Temperature storage | Endurance test applying the high storage temperature for a long time. | +80°C , 96hrs | 2 |
| Low Temperature storage | Endurance test applying the low storage temperature for a long time. | -30°C , 96hrs | 1,2 |
| High Temperature Operation | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time. | +70°C, 96hrs | 2 |
| Low Temperature Operation | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time. | -20°C , 96hrs | 1,2 |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +50°C , 90% RH , 96hrs | 1,2 |
| Thermal Shock resistance | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress. | -30°C, 30min -> 80°C, 30min, Change time: 5min, 10 cycles | |
| Vibration test | Endurance test applying vibration to simulate transportation and use. | 10-55Hz , 1.5mm amplitude. 60 sec in each of 3 directions X,Y,Z For 15 minutes | 3 |
| Static electricity test | Endurance test applying electric static discharge. | VS=800V, RS=1.5kΩ, CS=100pF One time | |

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisplay.com/specs/precautions.pdf

Warranty Information and Terms & Conditions

http://www.newhavendisplay.com/index.php?main_page=terms

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9