


# Current Sense Transformers CST2010

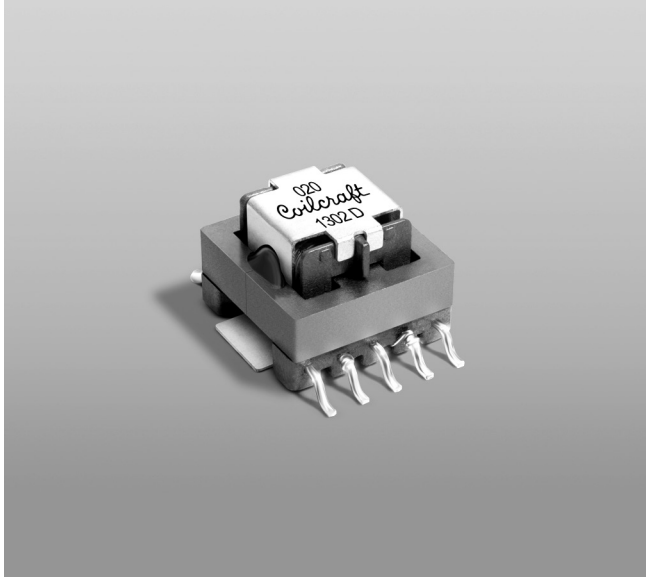

- AEC-Q200 Grade 1 qualified (–40°C to +125°C ambient)
- Sensed current up to 47 A; Frequency range up to 1 MHz
- Very low primary DC resistance
- 500 Vrms, one minute isolation (hipot) between windings

**Core material** Ferrite

**Terminations** RoHS compliant tin-silver over tin over nickel over phosphor bronze

**Weight** 4.13 g

**Ambient temperature** –40°C to +125°C

**Maximum part temperature** +165°C (ambient + temp rise)

**Storage temperature** Component: –40°C to +165°C.

Tape and reel Packaging: –40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

**Packaging** 300/13" reel; Plastic tape: 32 mm wide, 0.5 mm thick, 20 mm pocket spacing, 10.6 mm pocket depth

**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787\\_PCB\\_Washing.pdf](#).

| Part number <sup>1</sup> | Turns (N)<br>pri:sec | Inductance <sup>2</sup><br>±30% (mH) | DCR max<br>(Ohms) |       | Frequency<br>range<br>(kHz) | Volt-time<br>product <sup>3</sup><br>(Vµsec) | Sensed<br>current <sup>4</sup><br>I <sub>in</sub> (A) | Terminating<br>resistance R <sub>T</sub> <sup>5</sup><br>(Ohms) |
|--------------------------|----------------------|--------------------------------------|-------------------|-------|-----------------------------|----------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------------|
|                          |                      |                                      | pri               | sec   |                             |                                              |                                                       |                                                                 |
| CST2010-020L_            | 1:20                 | 0.34                                 | 0.00036           | 0.180 | 10 – 1000                   | 50.8                                         | 47                                                    | 0.5                                                             |
| CST2010-030L_            | 1:30                 | 0.76                                 | 0.00036           | 0.265 | 7 – 1000                    | 76.2                                         | 47                                                    | 0.8                                                             |
| CST2010-040L_            | 1:40                 | 1.36                                 | 0.00036           | 0.560 | 5 – 1000                    | 101.6                                        | 47                                                    | 1.0                                                             |
| CST2010-050L_            | 1:50                 | 2.12                                 | 0.00036           | 0.705 | 4 – 1000                    | 127.0                                        | 47                                                    | 1.3                                                             |
| CST2010-060L_            | 1:60                 | 3.06                                 | 0.00036           | 0.850 | 3 – 1000                    | 152.4                                        | 47                                                    | 1.5                                                             |
| CST2010-070L_            | 1:70                 | 4.16                                 | 0.00036           | 1.00  | 3 – 1000                    | 177.8                                        | 47                                                    | 1.8                                                             |
| CST2010-080L_            | 1:80                 | 5.44                                 | 0.00036           | 1.15  | 2 – 1000                    | 203.2                                        | 47                                                    | 2.0                                                             |
| CST2010-100L_            | 1:100                | 8.50                                 | 0.00036           | 1.45  | 2 – 1000                    | 254.0                                        | 47                                                    | 2.5                                                             |
| CST2010-125L_            | 1:125                | 13.3                                 | 0.00036           | 1.85  | 2 – 1000                    | 317.5                                        | 47                                                    | 3.1                                                             |
| CST2010-150L_            | 1:150                | 19.2                                 | 0.00036           | 2.25  | 1 – 1000                    | 381.0                                        | 47                                                    | 3.8                                                             |
| CST2010-200L_            | 1:200                | 34.0                                 | 0.00036           | 4.06  | 1 – 1000                    | 508.0                                        | 47                                                    | 5.0                                                             |

1. When ordering, please specify **packaging** code:

## CST2010-200LD


**Packaging:** D = 13" machine-ready reel. EIA-481 embossed plastic tape (300 parts per full reel).

B = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to D.

- Inductance measured between secondary pins at 1 kHz, 0.1 Vrms, 0 Adc.
  - Maximum volt-time product is for the secondary, based on 2000 Gauss.
  - Primary current of 47 A causes approximately 40°C temperature rise from 25°C ambient. Higher current causes a greater temperature rise (see Temperature Rise vs Current curve).
  - Terminating resistance (R<sub>T</sub>) value is based on 1 Volt output with 40 Amps flowing through the primary. Varying terminating resistance increases or decreases output Voltage/Ampere according to the following equation:  

$$R_T = V_{out} \times N_{sec} / I_{in}$$
  - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

## Typical Circuit

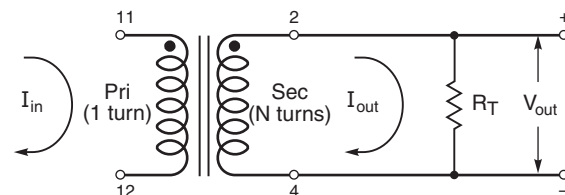

[www.coilcraft.com](http://www.coilcraft.com)

**US** +1-847-639-6400 [sales@coilcraft.com](mailto:sales@coilcraft.com)  
**UK** +44-1236-730595 [sales@coilcraft-europe.com](mailto:sales@coilcraft-europe.com)  
**Taiwan** +886-2-2264 3646 [sales@coilcraft.com.tw](mailto:sales@coilcraft.com.tw)  
**China** +86-21-6218 8074 [sales@coilcraft.com.cn](mailto:sales@coilcraft.com.cn)  
**Singapore** + 65-6484 8412 [sales@coilcraft.com.sg](mailto:sales@coilcraft.com.sg)

Document 1100-1 Revised 02/07/20


© Coilcraft Inc. 2020

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.




# CST2010 SMT Current Sense Transformers

## Temperature Rise vs Current

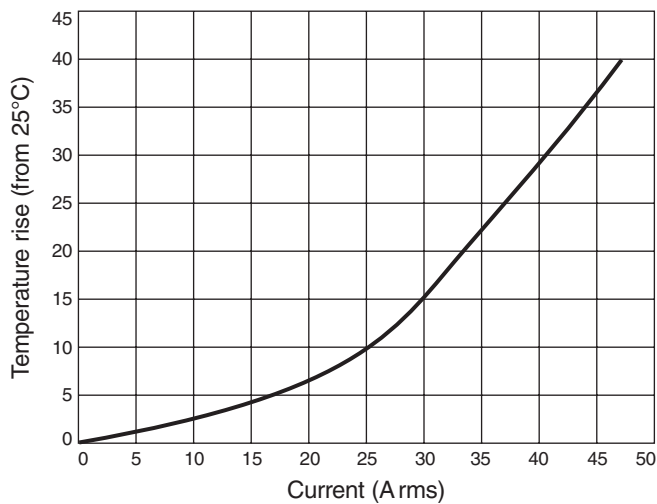


## Dimensions

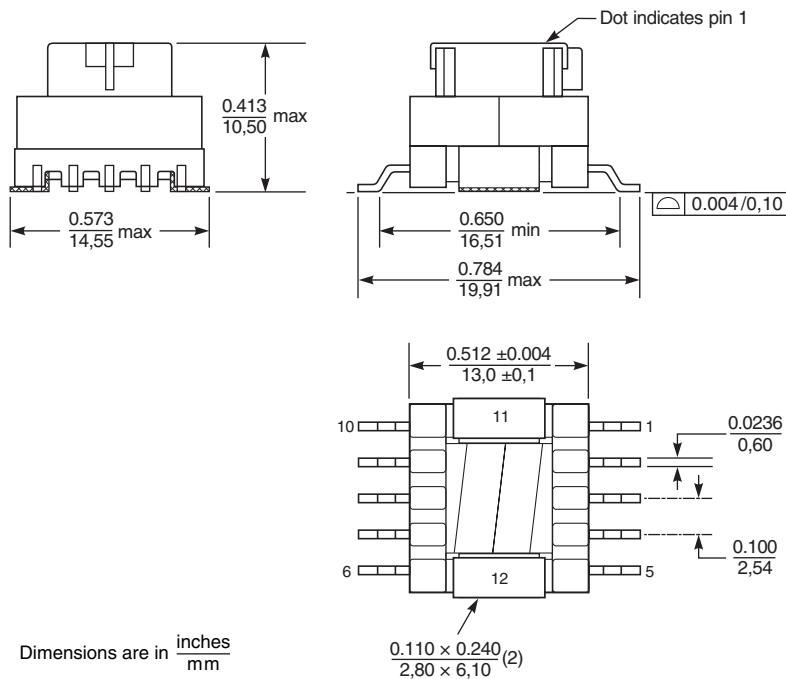

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$

## Recommended Land Pattern

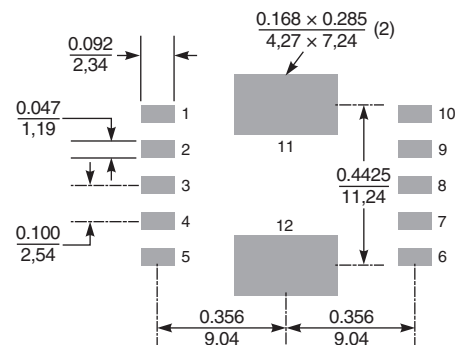

www.coilcraft.com

**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 1100-2 Revised 02/07/20

© Coilcraft Inc. 2020

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9