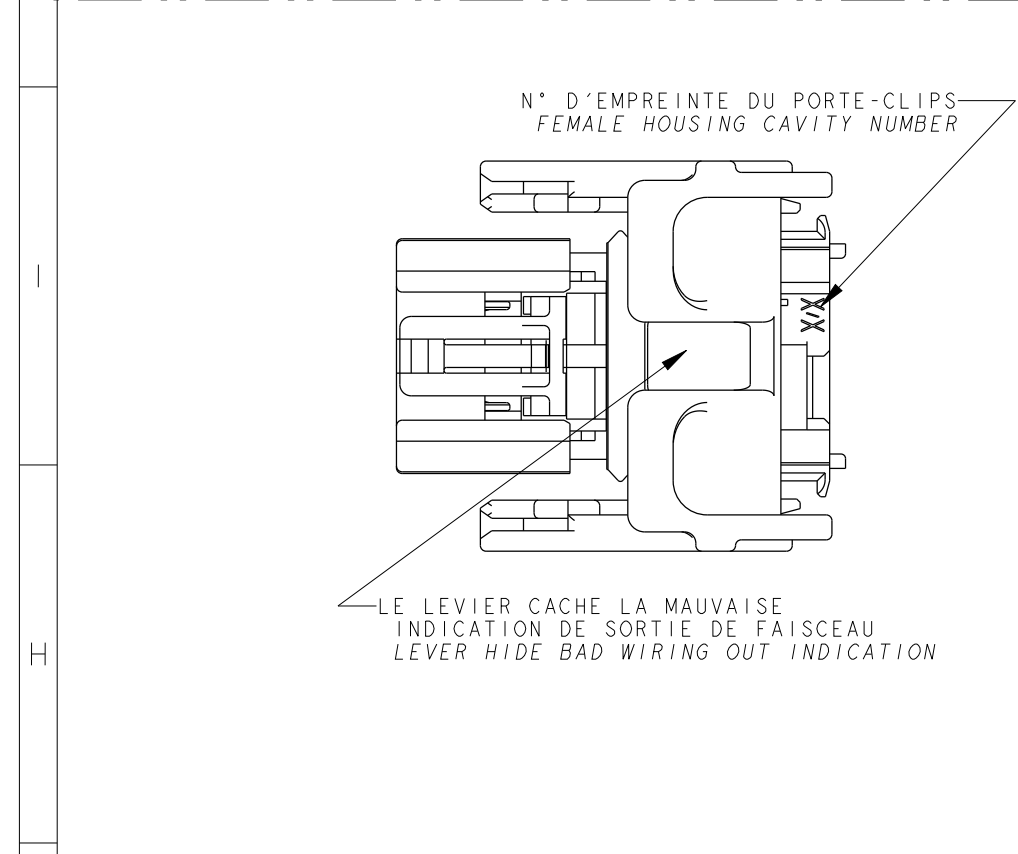



[illegible]

DETAIL ALVEOLES 0.635
DETAIL CAVITIES 0.635

40 x 0.80 ± 0.05
0.20 μm A B C

40 x 0.90 ± 0.05
0.20 μm A B C

ECHELLE 5:1 / SCALE 5:1

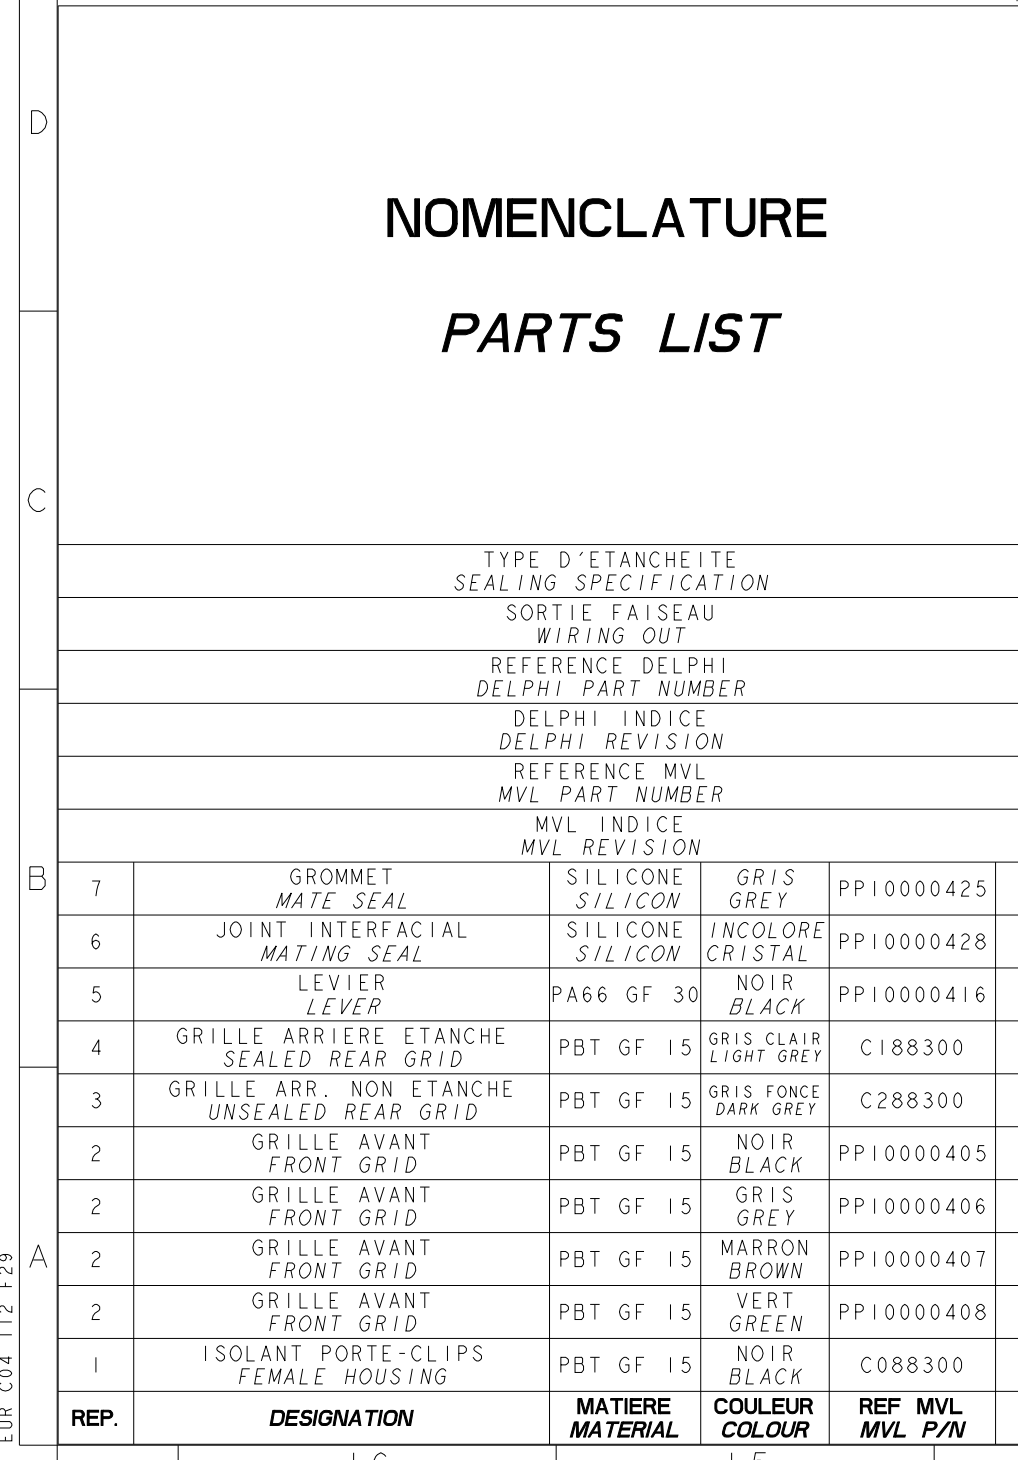

14 13 12

N° D'EMPREINTE DU LEVIER
LEVER CAVITY NUMBER

X 1/2

SORTIE FAISCEAU A DROITE
RIGHT WIRING OUT

43.50 (L)

39.75±0.11

⌀ 0.10 (B)

2.650

(B)

(C)

12.60

6.30

14.85

22.50


3.70

3.50

8.40±0.10

20.70±0.11

⌀ 10.10 (C)

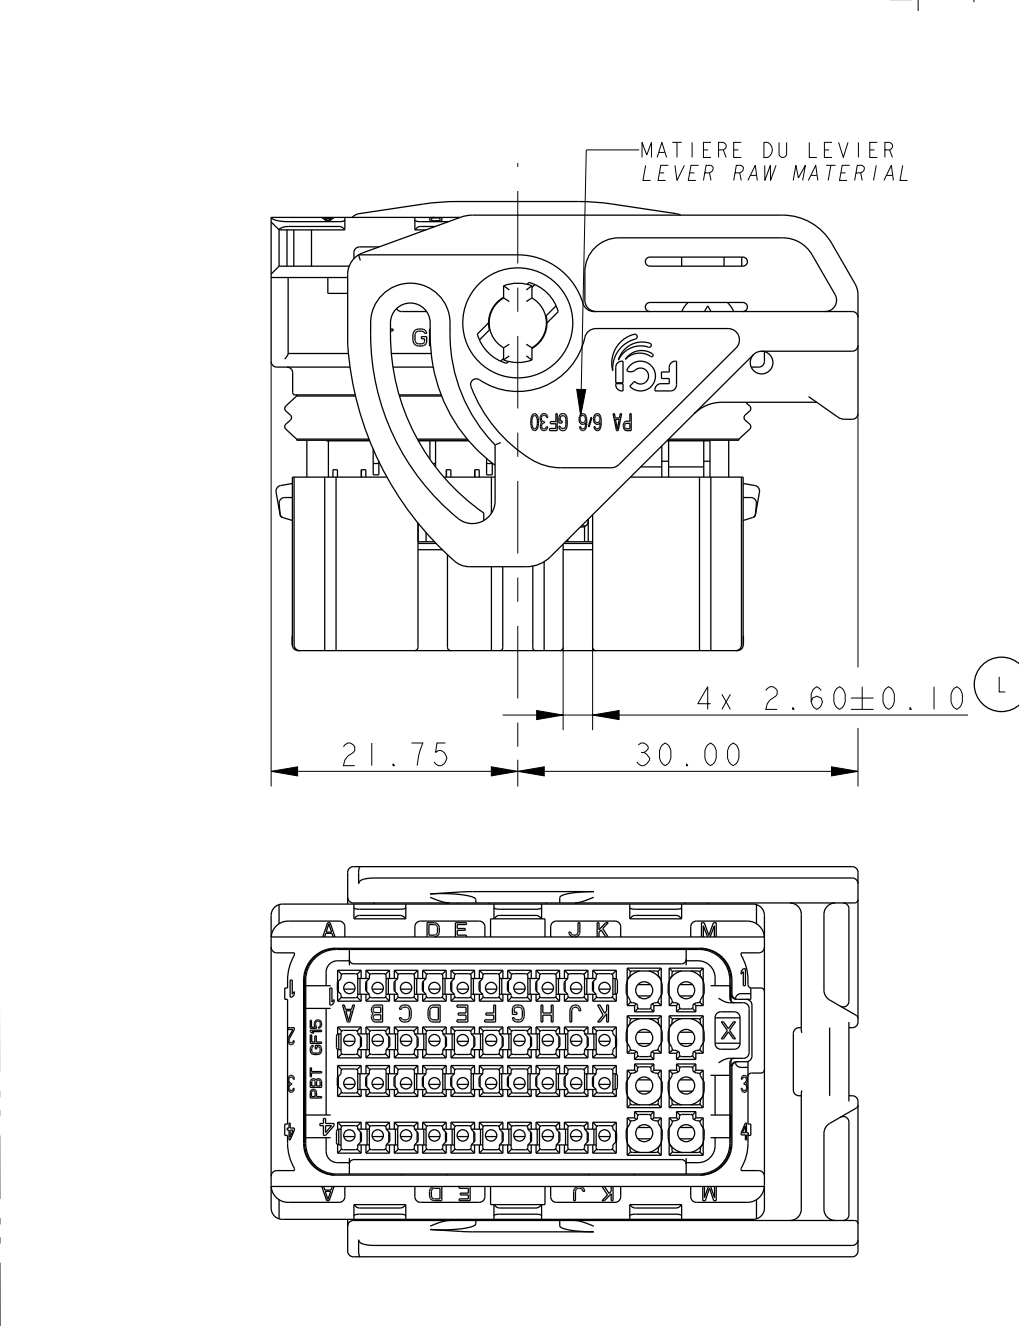

INDICE DU PORTE-CLIPS ASSEMBLE
REVISION LEVEL OF FEMALE CONNECTOR

ZONE DE MARQUAGE
MARKING AREA

**MARQUAGES EN DESSOUS DU LEVIER
(LEVIER ENLEVE POUR CETTE VUE)
(MARKING UNDER LEVER COMPONENT
(LEVER REMOVED FOR THIS VIEW))**


LOGO DELPHI
DELPHI'S LOGO

INDICATION SORTIE FAISCEAU (DROIT)
WIRING OUT INDICATION (RIGHT)

38.20 ± 0.25
GRILLE PRE-VERROUILLEE
(POSITION DE LIVRAISON)
GRID PRE-LOCKED (DELIVERY POSITION)

34.40 ± 0.30
0.20 C


A

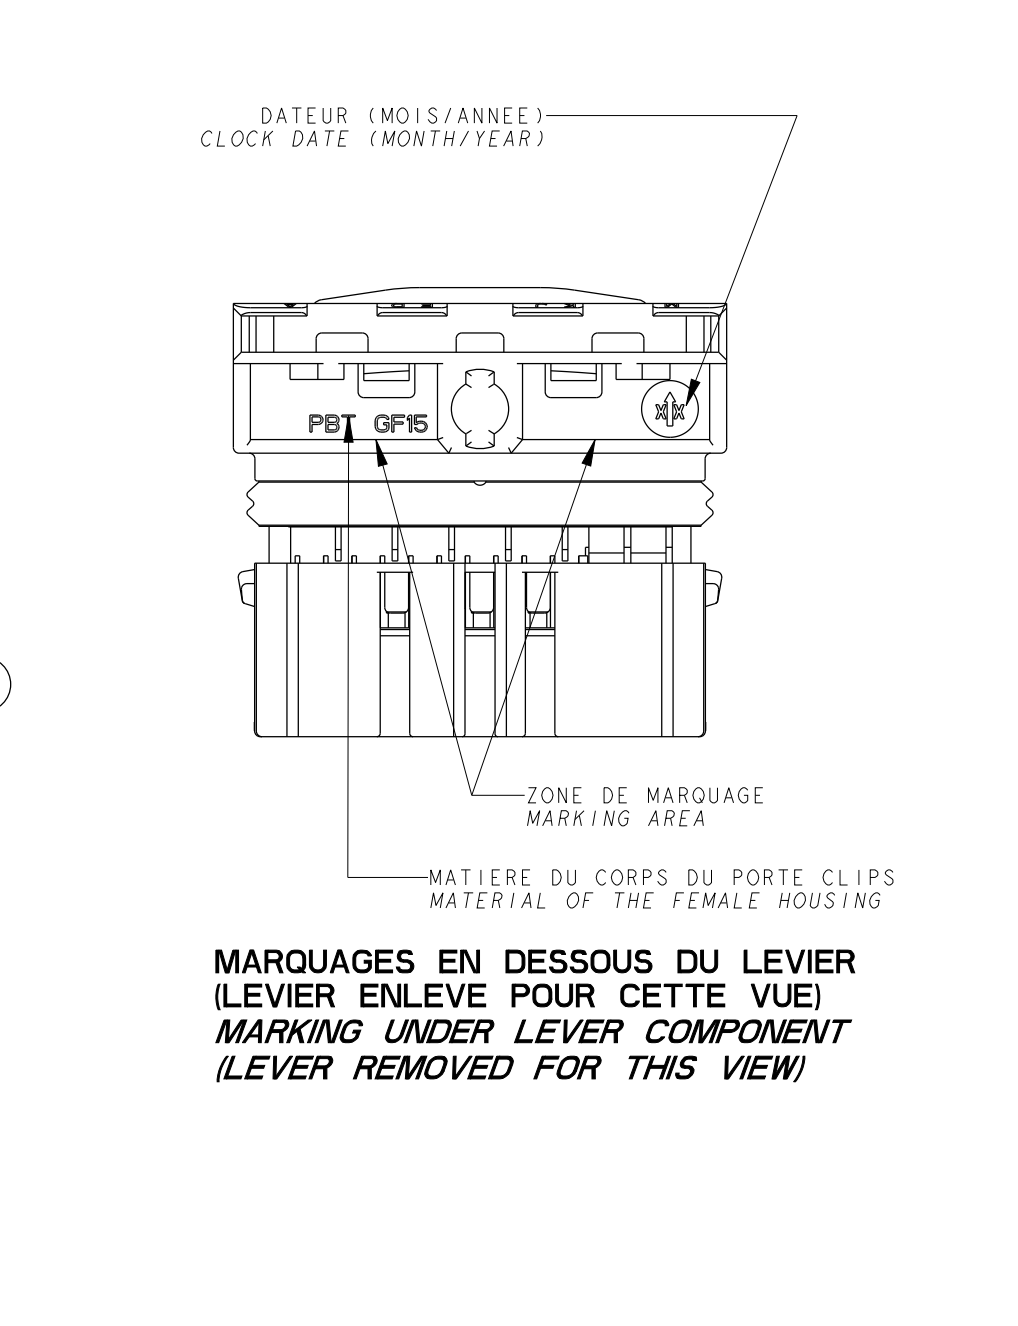

CODAGE : EN ACCORD AVEC LA SPECIFICATION NF R 13
 CODING : IN ACCORDANCE WITH NF R 13-462 SPECIFICATION
 CODAGE GRIS
 GREY CODING

INDICATION SORTIE FAISCEAU (GAUCHE)
WIRING OUT INDICATION (LEFT)

Technical drawing showing the wiring harness and fuse block assembly. The drawing includes a side view of the fuse block and a top view of the wiring harness. The side view shows the fuse block with a label 'KAB 100 A' and a warning symbol. The top view shows the wiring harness with multiple wires and a label 'KAB 100 A'.

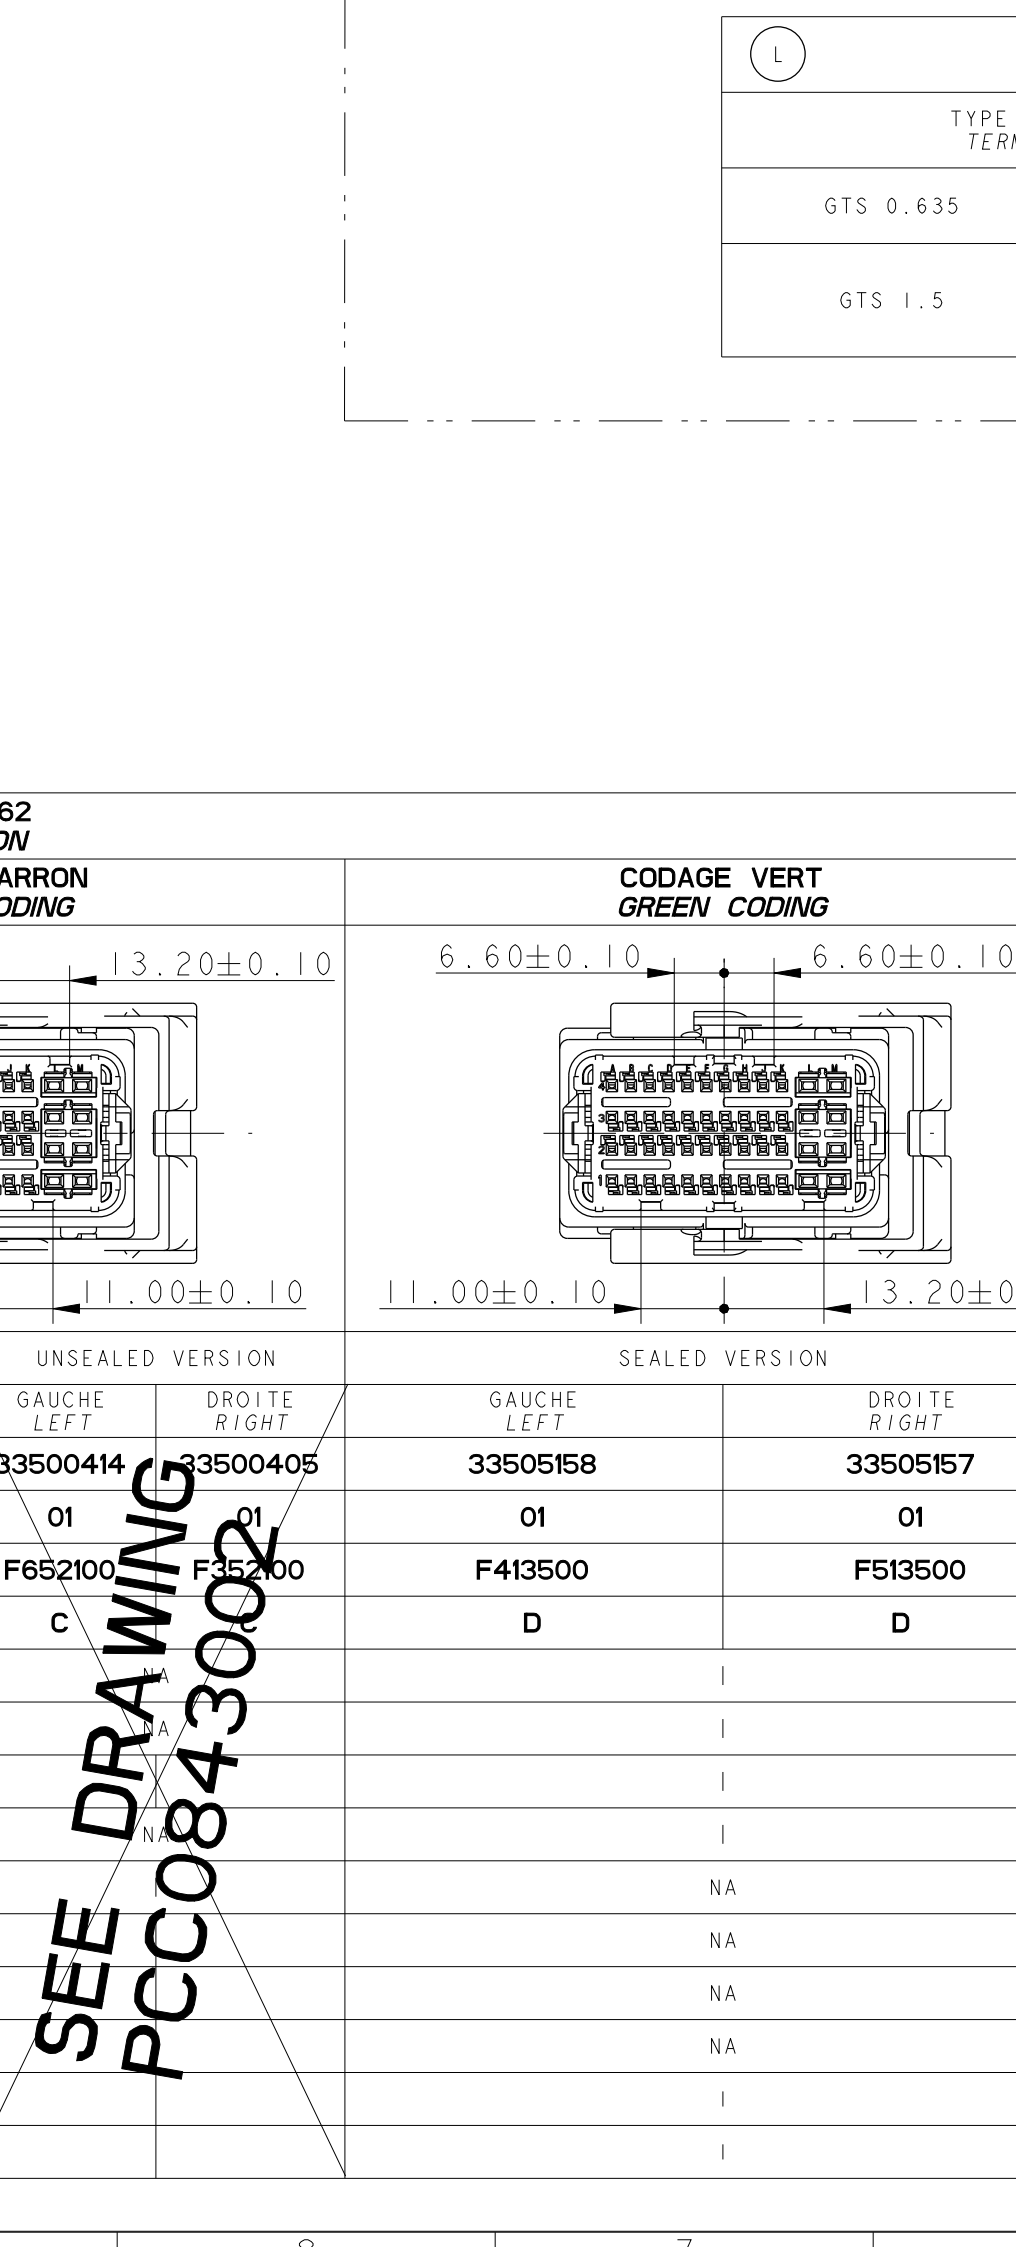

6 5 4 3 2 1

PA 56 GF30

FC

SORTIE FAISCEAU A GAUCHE
LEFT WIRING OUT

XX

XX

X/X

CAPOT COVER		PRODUITS ASSOCIES ASSOCIATED PARTS			
		BOUCHON D'AL CAVITY PL			
		CAVITE 0.635 0.635 CAVITY			
SORTIE DES FILS WIRES OUTPUT	MVL P/N	DELPHI P/N	MVL P/N	DELPHI P/N	MVL P/N
0°	F965000	13956254	PP10001045	13768626	PP10001045
45°	PP10001538	33517228			

	Ø DE FILS MINI ET MAXI SUITABLE MIN. AND MAX. WIRES	Ø TO GUARANTEE THE
DE CONTACT MINAL SIZE	REFERENCE MVL MVL PART NUMBER	REFERENCE DELPHI DELPHI PART NUMBER
0 . 3,5mm²	PP10001619	I3955989
0 . 5,0mm²	PP10000489	I3648598
0 . 5,0mm² - 0 . 8,5mm²	PP10001482	I3712871
1 . 0,0mm² - 1 . 3,0mm²	PP10001483	I3741954
1 . 4,0mm² - 2 . 0,0mm²	PP10001484	I3749482

SEALED VERSION		PRINCIPE MA
		FORCE D'INSERTION DE TERMINAL INSERTION
		EFFORT DE POLARISATION TERMINAL POLARISATION
		EFFORT DE RETENTION RETENTION FORCE WITH
		EFFORT SUR LE LEVIER MATINGS FORCE ON THE
		EFFORT SUR LE LEVIER UNMATING FORCE ON THE
		EFFICACITE DE VERROU FULL ENGAGED EFFICIENCY
		CLASSE DE TEMPERATURE OPERATING TEMPERATURE
		CLASSE DE VIBRATION VIBRATION CLASS
		CLASSE D'ETANCHEITE SEALING CLASS
UNSEALED VERSION		
		B7 GREY
		B7 YELLOW
		CHA CHA
		CHA CHA
		ADD ADD
		ADD ADD
		REM REM
		REV REV
		CHA CHA
SEE DRAWING PCC0843002		ECH.-NO. AWG/SEC POSITION
		PACKAGING SPEC. SPECIF. PRODUIT
		TOLERANCES TOLERANCES
		CONTRIBUT W. CONTRIBUTEUR
		TOO NOT MEASURED DRAWING NE PAS MESURER DE COTES
		DATE NAME
		CREATED BY DATE
		MODIFIED BY DATE
		APPROVED BY DATE
		FILE NAME

20080324	F CHAOTTE
20040904	S LAFOUR
20040909	F FAURE
20040909	Plaque METAL

PCC0420007

SPECIFICATION DE CONDITIONNEMENT PACKAGING SPECIFICATION
FE PA 06 013
CAHIER DES CHARGES SPECIFICATION
NF R 13-462 FE PS 07 023
MISE EN OEUVRE APPLICATION SPECIFICATION
DOSSIER DE PRECONISATION : PU 087 USER'S MANUAL: PU 087

DESIGN OF THE PRODUCT			
OUR FILE REF.	Ø MINI MINIMUM Ø	Ø MAXI MAXIMUM Ø	
	1.30	1.50	
	1.40	1.70	
	2.00	2.20	
	2.10	2.40	
	2.30	2.80	

MECANIQUES PROPERTIES	CT 0635	CT 15
	10N MAXI	12N MAXI
	24 MINI	30 MINI
	80N MINI	100N MINI

90° ET 180° ET 180°	
°C/°C	65N MAXI
NT PC/PC	65N MAXI
	200N MINI
	-40°C / +125°C
	15 g
	±0.5 Bar 1PX9K

	(L)
--	-----

PRODUCED IN TABLE

(B WAS A)

PRODUCED VERSION CONNECTOR AND HOUSING (D WAS C)

VERSIONS, WHICH ARE ONLY PRODUCED IN A VERSION

BE ACCORDANCE WITH OTHER CUSTOMER DRAWINGS

LOSING FOR AUTOMATIC CONTROL

CHANGE DESCRIPTION
MODIFICATION

RIGHT DELPHI CORPORATION AND/OR ITS AFFILIATES. ALL RIGHTS RESERVED. RE
 MARKING IS THE PROPERTY OF DELPHI CORPORATION AND CHANGING DELPHI
 MATERIALS, THE PRODUCTION, DISTRIBUTION AND UTILIZATION
 PROPERTY OF ITS RELATED OR NOT BEING, AS WELL AS CONNECTION
 CONTROL, WITHOUT EXPRESS AUTHORIZATION, IS PROHIBITED.

ÉTAT DE SURFACE

100 UN. CORR
CORE D.E. F.E

X PROJECT

PROJECT

AY. NO.

DISCRIPTION GERE SOUS P.D.S.
PAS DE MODIFICATION EN DEHORS

DELPHI PACKARD ELECTRONICAL ELECTRONIC ARCHITECTURE
EPERON, FRANCE

100 PROTECTION
PRODUCTION 100

REVISION
REV. IND.

PCC0420007

SERIAL RELEASED

See Table

NOMENCLATURE						
PARTS LIST						
TYPE D'ETANCHEITE						
SEALING SPECIFICATION						
SORTIE FAISAU						
WIRING OUT						
REFERENCE DELPHI						
DELPHI PART NUMBER						
DELPHI INDICE						
DELPHI REVISION						
REFERENCE MVL						
MVL PART NUMBER						
MVL INDICE						
MVL REVISION						
7	GROMMET MATE SEAL	SILICONE SILICON	GRIS GREY	PP10000425		C
6	JOINT INTERFACIAL MATING SEAL	SILICONE SILICON	INCOLORE CRISTAL	PP10000428		A
5	LEVIER	P466 GF 30	NOIR BLACK	PP10000416		A
4	GRILLE ARRIERE ETANCHE SEALED REAR GRID	PBT GF 15	GRIS CLAIR LIGHT GREY	C188300		C
3	GRILLE ARR. NON ETANCHE UNSEALED REAR GRID	PBT GF 15	GRIS FONCE DARK GREY	C288300		C
2	GRILLE AVANT FRONT GRID	PBT GF 15	NOIR BLACK	PP10000405		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	GRIS GREY	PP10000406		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	MARRON BROWN	PP10000407		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	VERT GREEN	PP10000408		B (L)
1	ISOLANT PORTE-CLIPS FEMALE HOUSING	PBT GF 15	NOIR BLACK	C088300		D (L)
REP.	DESIGNATION	MATIERE MATERIAL	COULEUR COLOUR	REF. MVL	MVL P/N	INDICE REVISION

CODAGE NOIR BLACK CODING				CODAGE GRIS GREY CODING				CODAGE MARRON BROWN CODING				CODAGE VERT GREEN CODING			
SEALED VERSION		UNSEALED VERSION		SEALED VERSION		UNSEALED VERSION		SEALED VERSION		UNSEALED VERSION		SEALED VERSION			
GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT		
13956021	13956255	33500411	35004000	33500499	33500500	33500417	35004008	33500419	33500420	33500414	35004005	33505158	33505157		
O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1		
PPI0001494	PPI0001495	F552100	F552100	PPI0001496	PPI0001497	F752100	F552100	F765000	F865000	F652100	F352100	F413500	F513500		
D	D	C		D	D	C		D	D	C		D	D		
I				I				I				I			
I				I				I				I			
I				I				I				I			
NA				NA				NA				NA			
I				NA				NA				NA			
NA				I				NA				NA			
NA				NA				I				NA			
NA				NA				NA				I			
I								I				I			
QTE QTY															

SEALED VERSION

UNSEALED VERSION

**SEE DRAWING
PCC0843002**

[illegible][illegible]

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9