

DETAIL ALVEOLES 15
DETAIL CAVITIES 15


8 x 1.00 ± 0.05

0.20 (M) A B C

8 x 1.80 ± 0.05

0.20 (M) A B C (L)

Echelle 5:1 / Scale 5:1

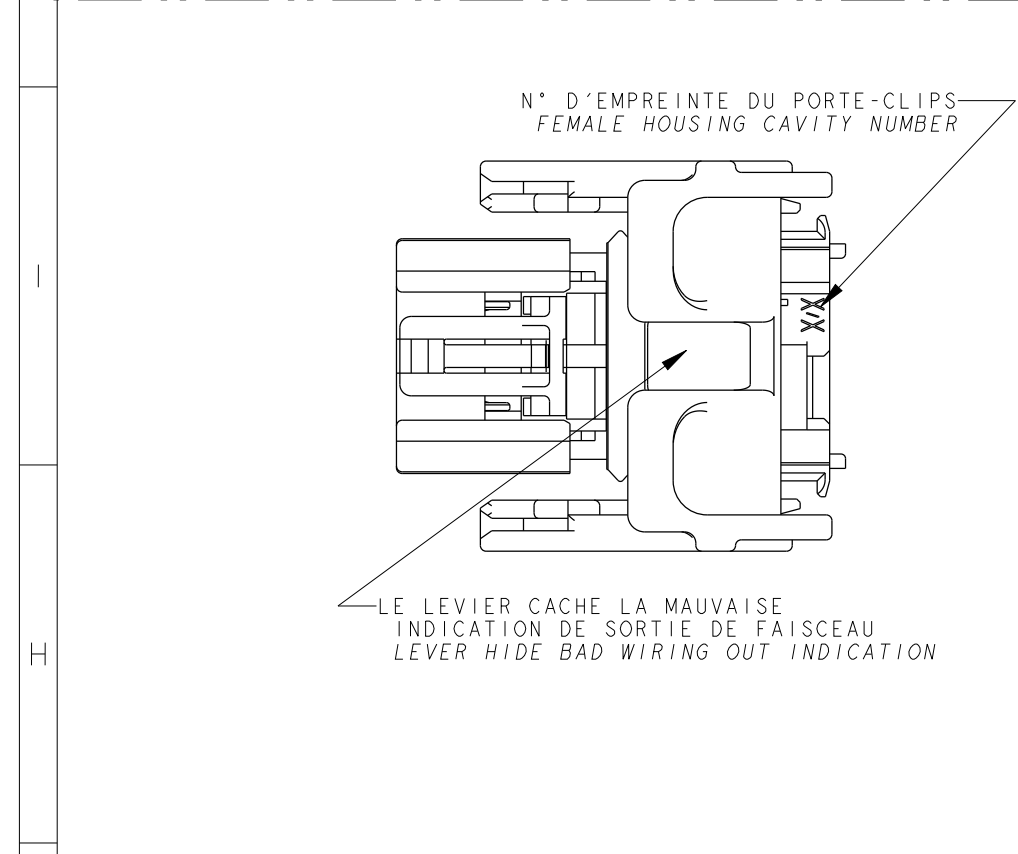

DETAIL ALVEOLES 0.635
DETAIL CAVITIES 0.635

40 x 0.80 ± 0.05


40 x 0.90 ± 0.05

0.20

0.20

E F

ECHELLE 5:1 / SCALE 5:1

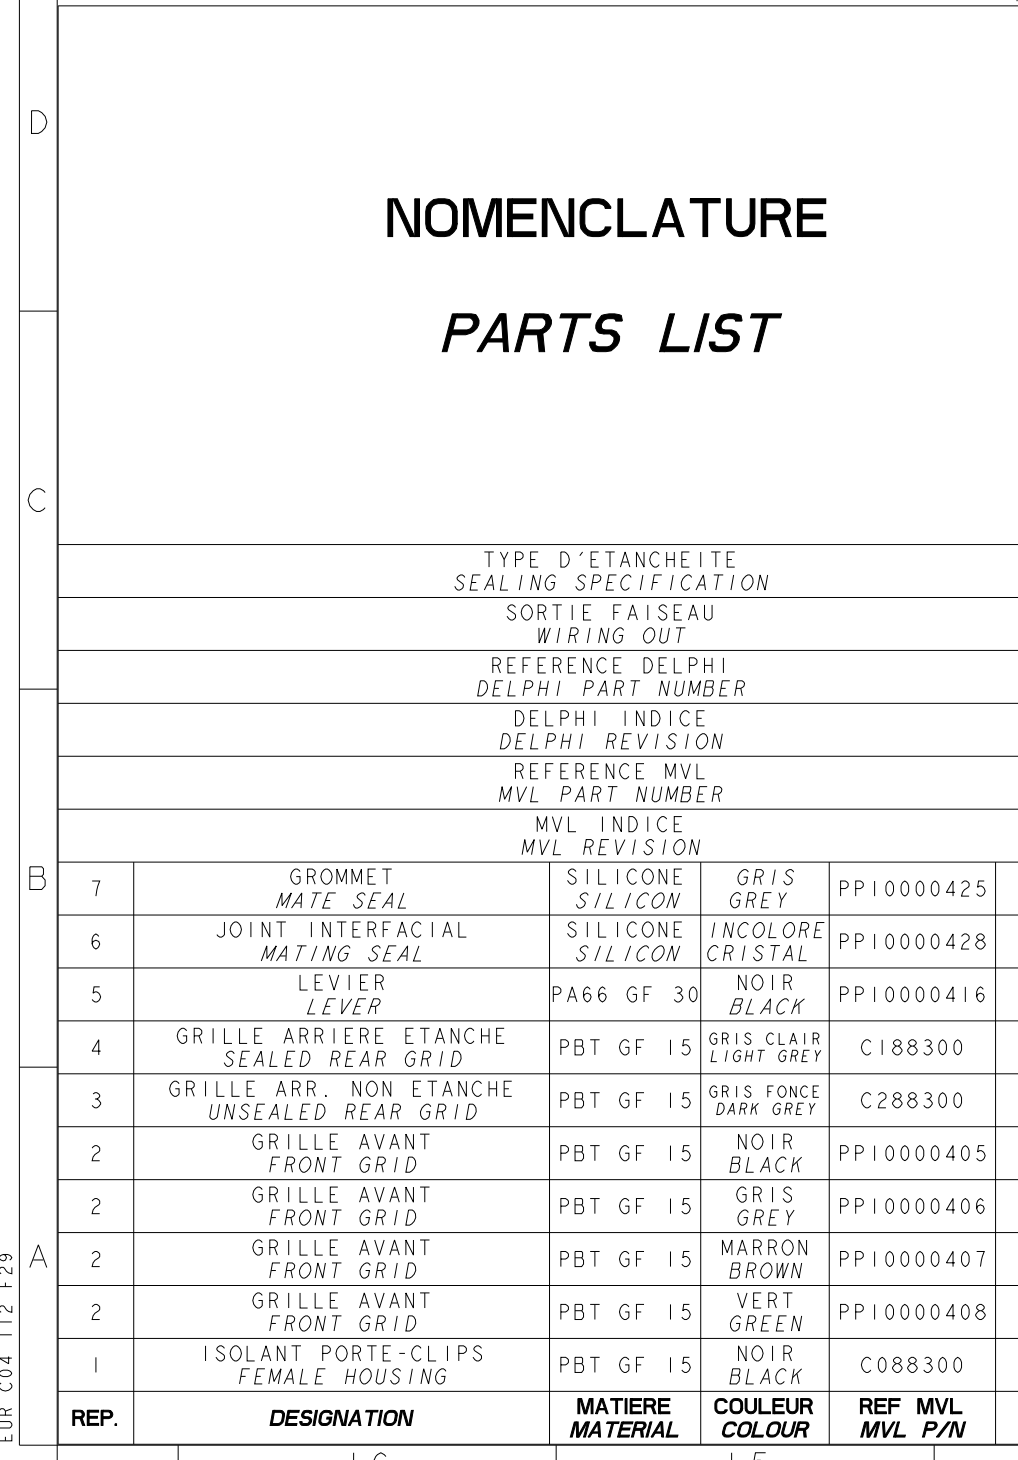


Technical drawing of the right wiring out (SORTIE FAISCEAU A DROITE) showing a perspective view and a detailed dimensioned view.

Perspective View: Shows the lever cavity number (N° D'EMPREINTE DU LEVIER / LEVER CAVITY NUMBER) and the X1/2 marking.

Dimensioned View: Provides precise measurements for the wiring out assembly.

Dimensions:

- Overall width: 43.50
- Width of terminal block: 39.75 ± 0.11
- Terminal block width tolerance: 0.10
- Distance from terminal block to center: 2.650
- Distance from terminal block to right edge: 14.85
- Distance from terminal block to right edge (alternative): 22.50
- Distance from terminal block to right edge (alternative): 3.70
- Distance from terminal block to right edge (alternative): 3.50
- Distance from terminal block to right edge (alternative): 8.40 ± 0.10
- Distance from terminal block to right edge (alternative): 20.70 ± 0.11
- Distance from terminal block to right edge (alternative): 10.10
- Distance from terminal block to right edge (alternative): 12.60
- Distance from terminal block to right edge (alternative): 6.30

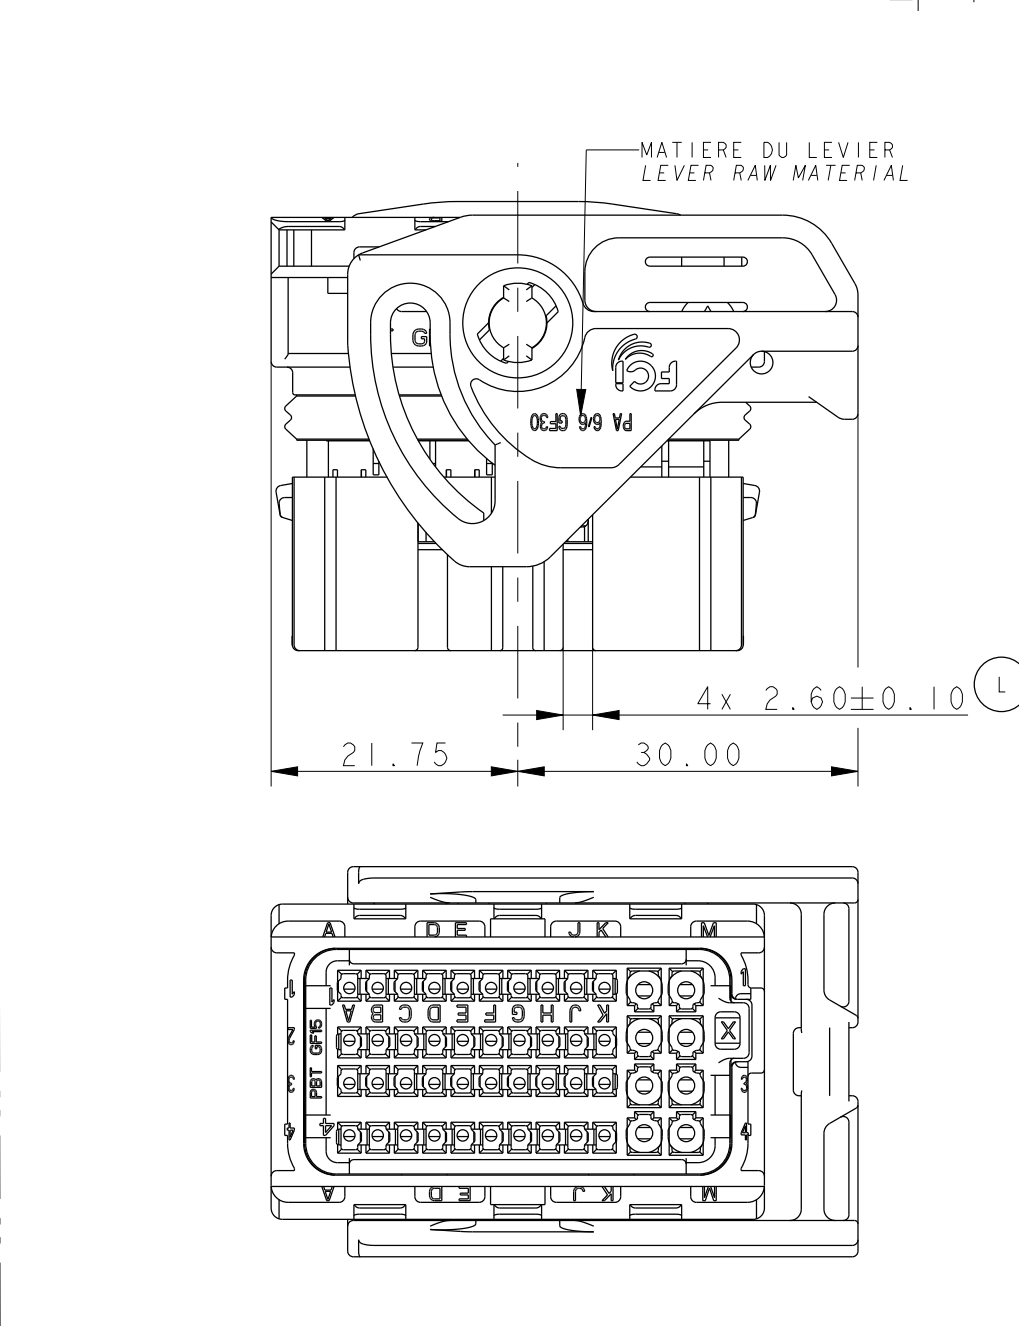

INDICE DU PORTE-CLIPS ASSEMBLE
REVISION LEVEL OF FEMALE CONNECTOR

ZONE DE MARQUAGE
MARKING AREA

**MARQUAGES EN DESSOUS DU LEVIER
(LEVIER ENLEVE POUR CETTE VUE)
(MARKING UNDER LEVER COMPONENT
(LEVER REMOVED FOR THIS VIEW))**


LOGO DELPHI
DELPHI'S LOGO

INDICATION SORTIE FAISCEAU (DROIT)
WIRING OUT INDICATION (RIGHT)

38.20 ± 0.25
GRILLE PRE-VERROUILLEE
(POSITION DE LIVRAISON)
GRID PRE-LOCKED (DELIVERY POSITION)

34.40 ± 0.30
0.20 C


A

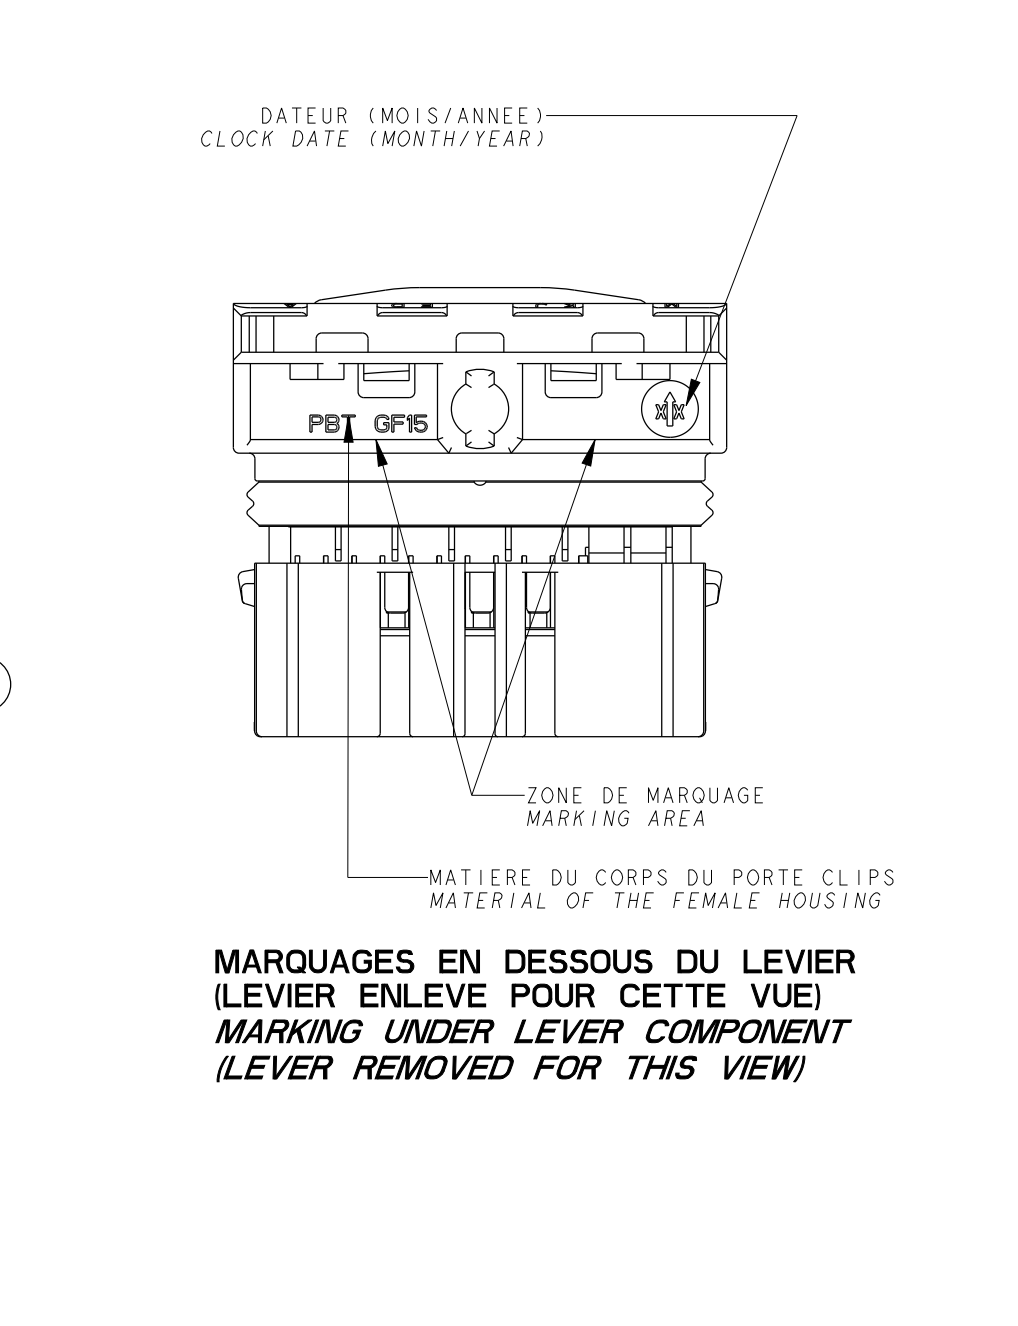

CODAGE : EN ACCORD AVEC LA SPECIFICATION NF R 13
 CODING : IN ACCORDANCE WITH NF R 13-462 SPECIFICATION
 CODAGE GRIS
 GREY CODING

INDICATION SORTIE FAISCEAU (GAUCHE)
 WIRING OUT INDICATION (LEFT)

Technical drawing showing the wiring harness and fuse block assembly. The drawing includes a side view of the fuse block and a top view of the wiring harness. The side view shows the fuse block with a label 'KAB 100 A' and a warning symbol. The top view shows the wiring harness with multiple wires and a label 'KAB 100 A'.

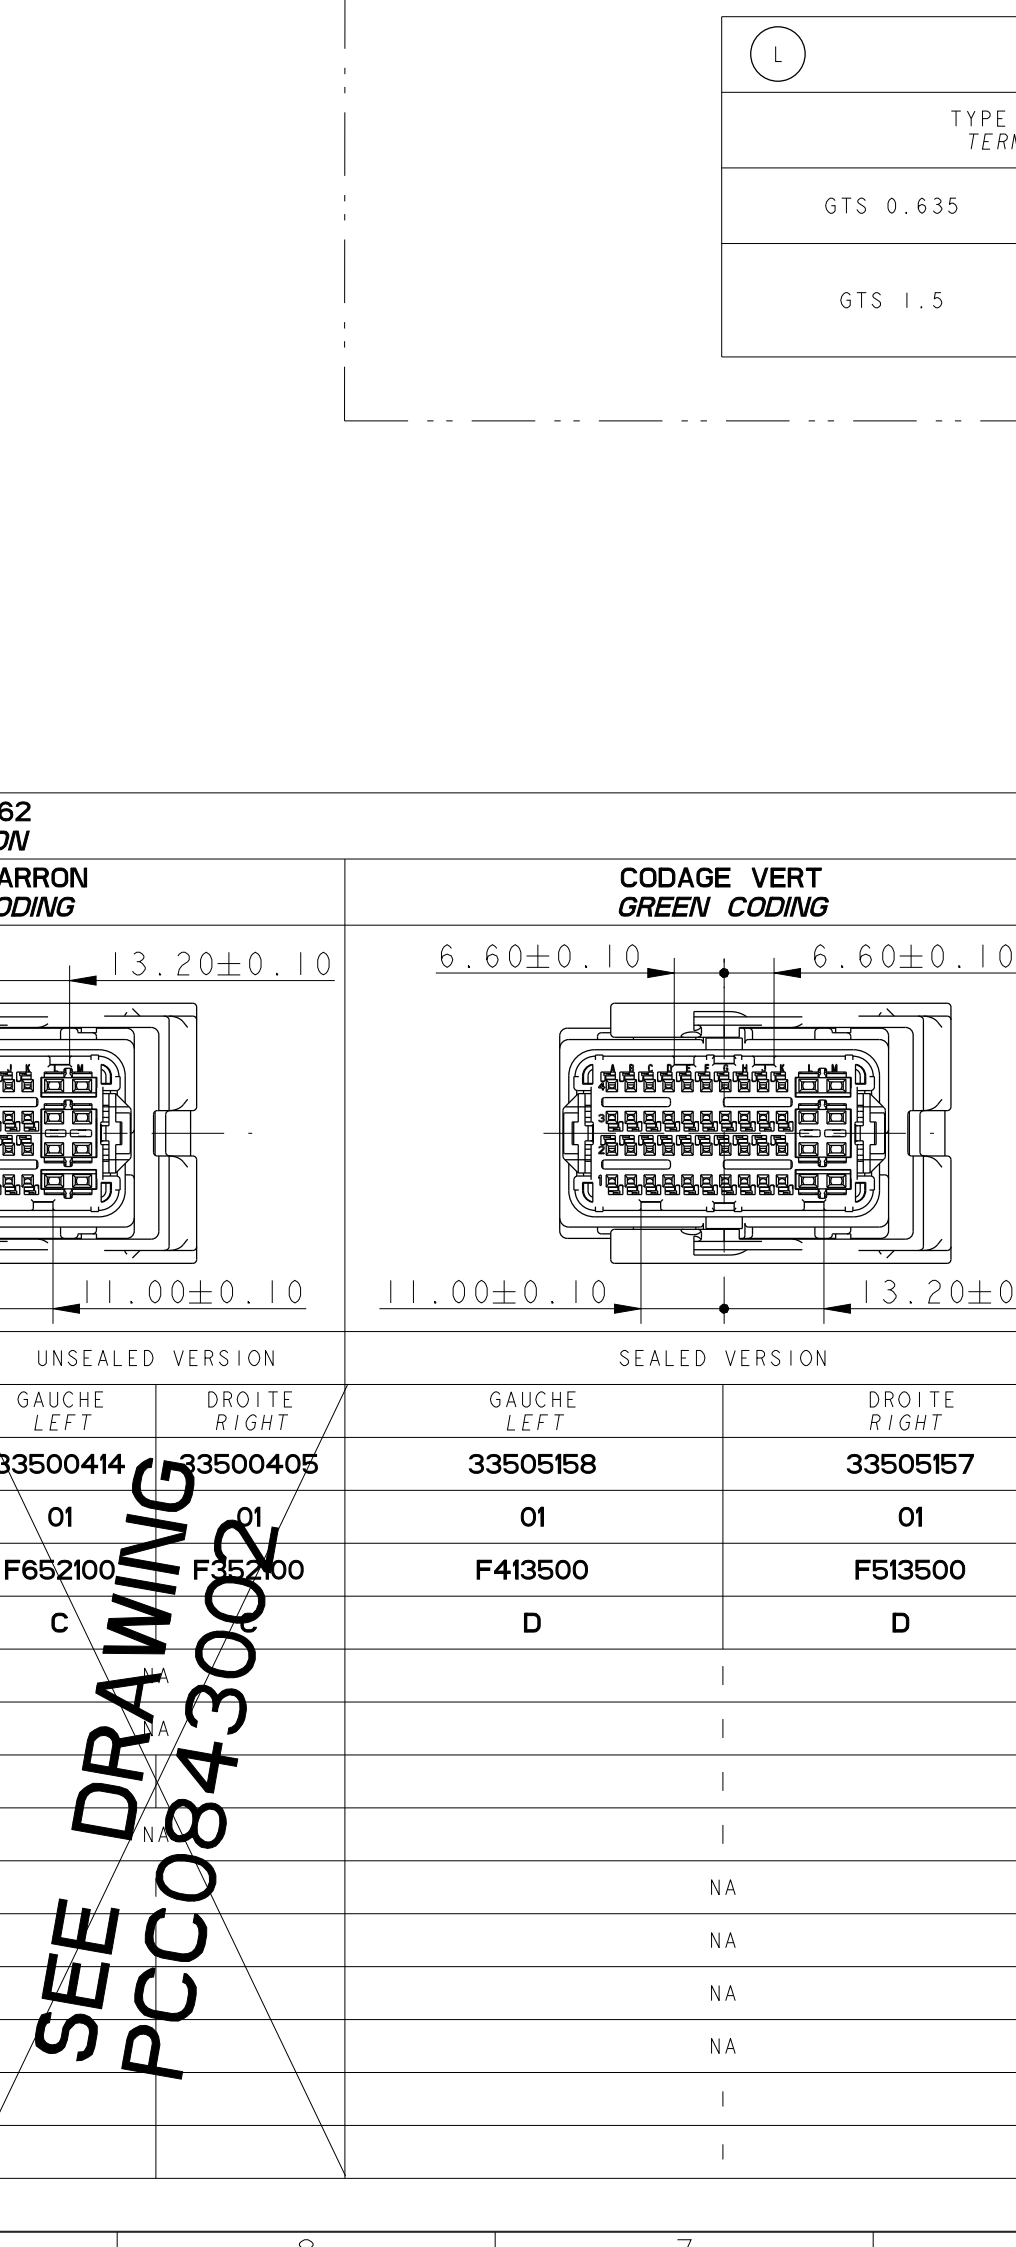

SORTIE FAISCEAU A GAUCHE
LEFT WIRING OUT

CAPOT COVER		BOUCHON D'AL CAVITY PL			
		CAVITE 0.635 0.635 CAVITY			
SORTIE DES FILS WIRES OUTPUT	MVL P/N	DELPHI P/N	MVL P/N	DELPHI P/N	MVL P/N
0°	F965000	13956254	PP10001045	13768626	PP10001045
45°	PP10001538	33517228			

PRODUITS ASSOCIES
ASSOCIATED PARTS

[illegible]

LE LEVIER CACHE LA MAUVAISE
INDICATION DE SORTIE DE FAISCEAU
LEVER HIDE BAD WIRING OUT INDICATION

SPECIFICATION DE CONDITIONNEMENT
PACKAGING SPECIFICATION

FE PA 06 013

CAHIER DES CHARGES
SPECIFICATION

NF R 13-462
FE PS 07 023

MISE EN OEUVRE
APPLICATION SPECIFICATION

DOSSIER DE PRECONISATION : PU 087
USER'S MANUAL: PU 087

[illegible]

NOMENCLATURE						
PARTS LIST						
TYPE D'ETANCHEITE						
SEALING SPECIFICATION						
SORTIE FAISAU						
WIRING OUT						
REFERENCE DELPHI						
DELPHI PART NUMBER						
DELPHI INDICE						
DELPHI REVISION						
REFERENCE MVL						
MVL PART NUMBER						
MVL INDICE						
MVL REVISION						
7	GROMMET MATE SEAL	SILICONE SILICON	GRIS GREY	PP10000425		C
6	JOINT INTERFACIAL MATING SEAL	SILICONE SILICON	INCOLORE CRISTAL	PP10000428		A
5	LEVIER	PA66 GF 30	NOIR BLACK	PP10000416		A
4	GRILLE ARRIERE ETANCHE SEALED REAR GRID	PBT GF 15	GRIS CLAIR LIGHT GREY	C188300		C
3	GRILLE ARR. NON ETANCHE UNSEALED REAR GRID	PBT GF 15	GRIS FONCE DARK GREY	C288300		C
2	GRILLE AVANT FRONT GRID	PBT GF 15	NOIR BLACK	PP10000405		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	GRIS GREY	PP10000406		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	MARRON BROWN	PP10000407		B (L)
2	GRILLE AVANT FRONT GRID	PBT GF 15	VERT GREEN	PP10000408		B (L)
1	ISOLANT PORTE-CLIPS FEMALE HOUSING	PBT GF 15	NOIR BLACK	C088300		D (L)
REP.	DESIGNATION	MATIERE MATERIAL	COULEUR COLOUR	REF. MVL	MVL P/N	INDICE REVISION

CODAGE NOIR BLACK CODING				CODAGE GRIS GREY CODING				CODAGE MARRON BROWN CODING				CODAGE VERT GREEN CODING			
SEALED VERSION		UNSEALED VERSION		SEALED VERSION		UNSEALED VERSION		SEALED VERSION		UNSEALED VERSION		SEALED VERSION			
GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT	GAUCHE LEFT	DROITE RIGHT		
13956021	13956255	33500411	35004000	33500499	33500500	33500417	35004008	33500419	33500420	33500414	35004005	33505158	33505157		
O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1	O1		
PPI0001494	PPI0001495	F552100	F552100	PPI0001496	PPI0001497	F752100	F552100	F765000	F865000	F652100	F352100	F413500	F513500		
D	D	C		D	D	C		D	D	C		D	D		
I				I				I				I			
I				I				I				I			
I				I				I				I			
NA				NA				NA				NA			
I				NA				NA				NA			
NA				I				NA				NA			
NA				NA				I				NA			
NA				NA				NA				I			
I								I				I			
QTE QTY															

SEALED VERSION

UNSEALED VERSION

**SEE DRAWING
PCC0843002**

PRINCIPALES PROPRIETES MECANQUES MAIN MECHANICAL PROPERTIES						CT O635	CT 15
FORCE D'INSERTION D'UN CONTACT TERMINAL INSERTION FORCE						10N MAXI	12N MAXI
EFFORT DE POLARISATION D'UN CONTACT A 90° ET 180° TERMINAL POLARISATION FORCE AT 90° AND 180°						24 MINI	30 MINI
EFFORT DE RETENTION AVEC DV RETENTION FORCE WITH SECONDARY LOCK						80N MINI	100N MINI
EFFORT SUR LE LEVIER D'ACCOUPLEMENT PC/PL MATING FORCE ON THE SLIDER DEVICE						65N MAXI	
EFFORT SUR LE LEVIER DE DESACCOUPLEMENT PC/PL UNMATING FORCE ON THE SLIDER DEVICE						65N MAXI	
EFFECTIVITE DE VERROUILLAGE FULL ENGAGED EFFICIENCY						200N MINI	
CLASSE DE TEMPERATURE OPERATING TEMPERATURE						-40°C / +125°C	
CLASSE DE VIBRATIONS VIBRATION CLASS						15 g	
CLASSE D'ETANCHEITE SEALING CLASS						±0.5 Bar 1PX9K	(L)
- -							
- DELPHI P/N ADDED							
- -							
- -							
- B7 GREEN CODING DETAILS ADDED IN TABLE							
- B7 VIEW MOVED TO D5							
- CHANGE REVISION OF TPA (B WAS A)							
- CHANGE REVISION OF SEALED VERSION CONNECTOR AND HOUSING (D WAS C)							
- ADD DELPHI PART NUMBER							
- ADD DELPHI LOGO							
- REMOVE OF UNSEALED VERSIONS, WHICH ARE ONLY PRODUCED IN A VERSION							
- REVIEW OF TOLERANCES TO BE ACCORDANCE WITH OTHER CUSTOMER DRAWINGS							
- CHANGE TO IMPROVE TPA CLOSING FOR AUTOMATIC CONTROL							
CHANGE DESCRIPTION MODIFICATION							
ECH-NOM REVISED ECH	POSITION POSITION	COPYRIGHT DELPHI CORPORATION AND/OR ITS AFFILIATES. ALL RIGHTS RESERVED. REVISED THIS DRAWING IS THE PROPERTY OF DELPHI CORPORATION AND CONTAINS DELPHI CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION OR UTILIZATION OF ANY PORTION OF IT WITHOUT THE WRITTEN EXPRESS AUTHORIZATION OF DELPHI CORPORATION IS STRICTLY PROHIBITED.					
PRODUCT SPEC. SPECIF. PRODUIT	DRAWING SPEC. SPECIF. ENSEMBLE	APPLICATION SPEC. SPECIF. APPLICATION	COPYRIGHT DELPHI CORPORATION AND/OR ITS AFFILIATES. ALL RIGHTS RESERVED. REVISED THIS DRAWING IS THE PROPERTY OF DELPHI CORPORATION AND CONTAINS DELPHI CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION OR UTILIZATION OF ANY PORTION OF IT WITHOUT THE WRITTEN EXPRESS AUTHORIZATION OF DELPHI CORPORATION IS STRICTLY PROHIBITED.	DELPHI II			ECAD SYSTEM
TOLERANCES TOLERANCES	±0.2 ±2*	MATERIAL : MATIERE :	SEE TABLE	STATE OF SURFACE			
CONTENT N°: CONTENU N°:		COLOR : COULEUR :	SEE TABLE	ECO Loc. Code CODE B & F			
DATE DATE	NOME NOW	TITLE TITLE	DESCRIPTION	DRAWING NUMBER REF. PLAN			
CREATED BY CREE PAR	20060305A	S CHANDOTTE	PROJECT PROJECT	STATE ETAT			
MODIFIED BY MODIFIE PAR	20140308	S LACOTTE	PROJECT PROJECT	PORT NUMBER REF. ARTICLE			
CHECKED BY CHECKE PAR	20140308	F FAUBRE	CMC PROJECT	DRAWING NUMBER REF. PLAN			
APPROVED BY APPR. PAR	20140308	Pascal MENARD	CMC PROJECT	SCALE ECHEL			
TITLE NAME NOM DE FIGURE	PCC0420007	DOCUMENT UNDER PDS CONTROL DOCUMENT GERE SOUS P.D.S.		See Table			

[illegible]

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9