

Helping Customers Innovate, Improve &amp; Grow



VX-501-0255-80M0

**Nominal frequency (f0)**
**80 MHz**
**Performance Specifications**
**Frequency stabilities**

Parameter	Min	Typical	Max	Units	Condition
Additional information	APR > ±20ppm incl. df vs initial, temp -40...85°C, dVs, dLoad, aging				

**Frequency Tuning**

Parameter	Min	Typical	Max	Units	Condition
Absolute pulling range (APR) (df/f0)	20			ppm	ext. tuning voltage @ 0 to 3.3V
Linearity			10	%	
slope (pos./neg.)	positiv				
Frequency control input impedance	1000			kOhm	

**RF output**

Parameter	Min	Typical	Max	Units	Condition
Signal	LVCMOS				
Load	13.5	15	16.5	pF	
Fan out	3				
Rise Time			3	ns	@20 to 80 %Vout
Fall Time			3	ns	@80 to 20 %Vout
Duty cycle	45		55	%	@1.65 V
V Low			0.3	V	
V High	2.97			V	
Spurious			-100	dBc	


Supply voltage					
Parameter	Min	Typical	Max	Units	Condition
Supply voltage (Vs)	3.14	3.3	3.47	V	
Current consumption steady state			24	mA	@ Vsnom & 25 °C

Additional Parameters					
Parameter	Min	Typical	Max	Units	Condition
Phase Noise		-75		dBc/Hz	@10Hz
		-108		dBc/Hz	@100Hz
		-130		dBc/Hz	@1kHz
		-149		dBc/Hz	@10kHz
		-154		dBc/Hz	@100kHz
		-158		dBc/Hz	@1MHz
		-161		dBc/Hz	@10MHz
Jitter			0.1	psec (RMS)	@ 12kHz to 80MHz
Additional information	Jitter typ 0.08psec				
Processing & Packing	handling&processing note				

Additional Environmental Conditions	
Parameter	Description
RoHS compliance	100% RoHS 6 compliant
Washable	non-washable device
ESD HBM	JESD22-A114F Class 1C - 10* 2000V
Mechanical Shock	MIL-STD-202 Meth 213B Cond. C - 100g 6ms 6 shocks in each direction
Vibration, Sine	MIL-STD-883 Meth 2007 Cond A - 20g 20-2000Hz 4x in each 3 axis 4min sweep time
Moisture Sen. Level	JESD22-A113-B - only if > MSL 1
Solderability	J-STD-002C Cond. A, Trough hole device; Cond.B, SMD ( correspond to MIL-STD-883 Meth 2003) - 255°C (dipping Time 5 ±0,5sec.) Dip&Look with 8h damp pre-treatment: solder wetting >95%
High temp operating life(HTOL)	MIL-STD-202 Meth108A Cond C - 1000h @ 105°C under voltage
Low temp operating life(LTOL)	IEC 60068-2-1 Cond. Ae - Ta= -40°C, >1000 hours with bias for OCXO
Reflow Simulation Test	J-STD-020D - Total 3x Lead free profile (for SMD)

Absolute Maximum Ratings					
Parameter	Min	Typical	Max	Units	Condition
Operable temperature range	-40		+85	°C	
Storage temperature range	-40		+90	°C	

# Enclosure

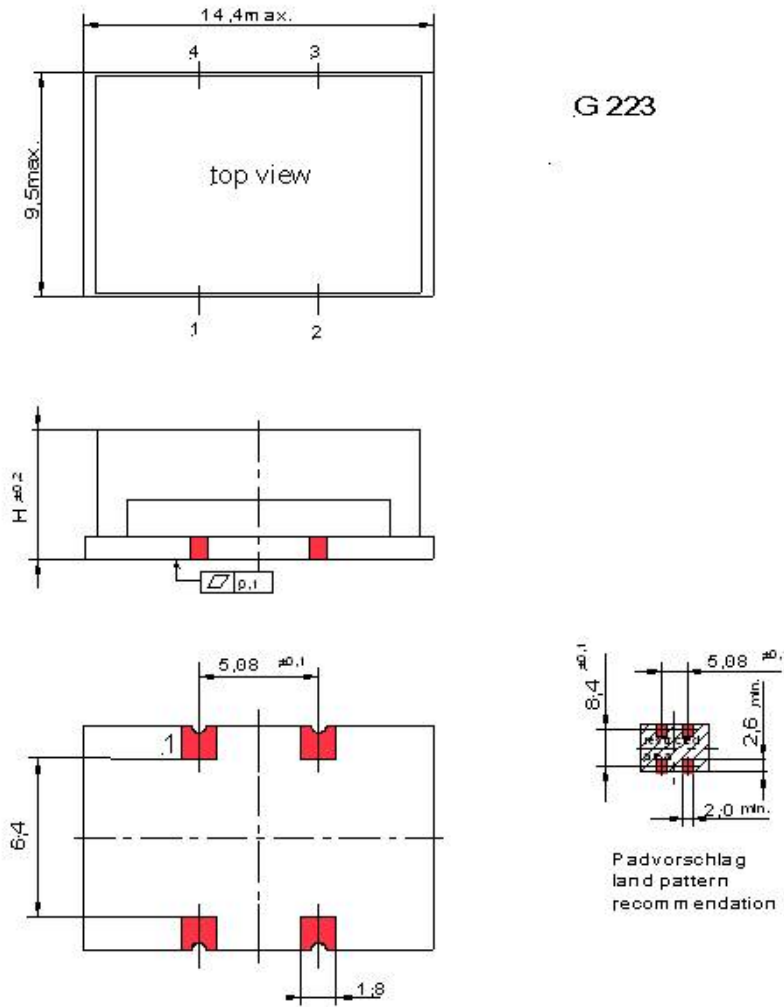

all units in mm

Enclosure Info	
Parameter	Description
Type	G223B
Height	5.9 mm
Pin Connections	1: Vc (control voltage) 2: GND(Case) 3: RF-Output 4: Vs (supply voltage)
Marking	VX-501-0255 80M000 * VI AYYWW * pin-1 marking
Package cover material	Metal
Package base material	FR4


## Solder profile

Recommended reflow solder profile according IPC/JEDEC J-STD-020 (latest revision)

Additional Information:

This SMD oscillator has been designed for pick and place reflow soldering  
SMD oscillators must be on the top side of the PCB during the reflow process.

## Standard shipping method

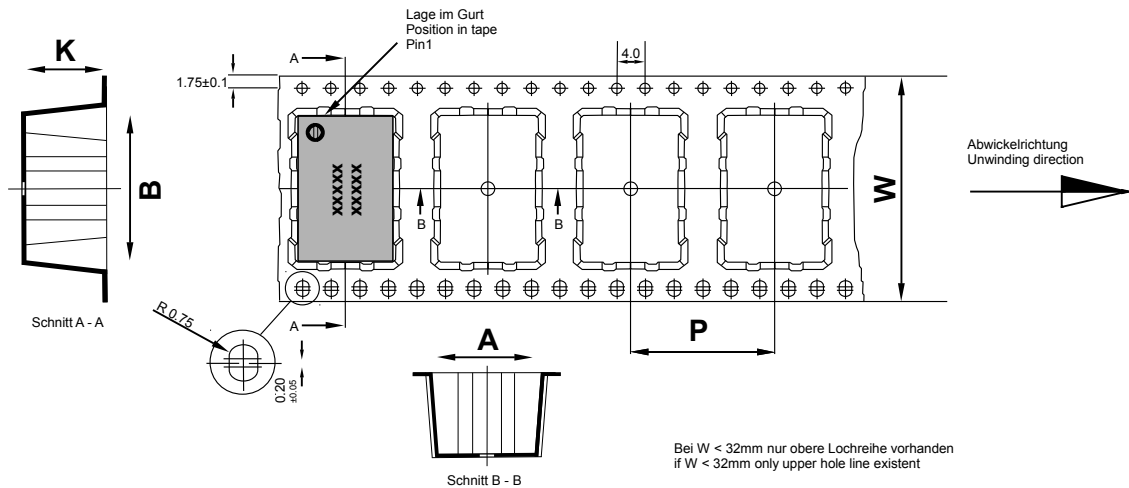

Maßangaben in mm:

A, B und K Maße von Bauelement abhängig

Fertigungstoleranzen entsprechen der DIN IEC 286-3

Dimension in mm:

A, B und K are dependent upon component dimensions

production tolerance complying DIN IEC 286-3

All dimensions in millimeters unless otherwise stated

### Reel Info

Tape width W [mm]	Quantity per meter	Quantity per reel	P [mm]	A [mm]	B [mm]	K [mm]
24	83.3	850	12	9.8	15	6.4

**Notes:** Unless otherwise stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).  
Subject to technical modification.

## For Additional Information, Please Contact

### USA:

Vectron International  
267 Lowell Road, Suite 102  
Hudson, NH 03051  
Tel: 1.888.328.7661  
Fax: 1.888.329.8328

### Europe:

Vectron International  
Landstrasse, D-74924  
Neckarbischofsheim, Germany  
Tel: +49 (0) 7268.801.100  
Fax: +49 (0) 7268.801.282

### Asia:

Vectron International  
68 Yin Cheng Road(C), 22nd Floor  
One LuJiaZui  
Pudong, Shanghai 200120, China  
Tel: +86 21 6194 6886  
Fax: +86 21 6194 6699

### Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9