

# Rheostats

## (Potentiometers) Wirewound



### MODEL C

| Model Type | Watts | Ohmic range | Core     | Max. Voltage (RMS)* | Behind panel "B" (in./mm Ref.) | Diameter "D" (in./mm Ref.) | Dimension "C" (in./mm Ref.) | Shaft torque   | Rotation (±5°) |
|------------|-------|-------------|----------|---------------------|--------------------------------|----------------------------|-----------------------------|----------------|----------------|
| C RCS/RCL  | 7.5   | 10.0-5K     | enclosed | 305                 | 0.875/22.23                    | 0.515/ 13.08               | —                           | 0.25-3 oz. in. | 300°           |


\* See Catalog #203 for complete details.



### MODEL E

| Model Type | Watts | Ohmic range | Core     | Max. Voltage (RMS)* | Behind panel "B" (in./mm Ref.) | Diameter "D" (in./mm Ref.) | Dimension "C" (in./mm Ref.) | Shaft torque | Rotation (±5°) |
|------------|-------|-------------|----------|---------------------|--------------------------------|----------------------------|-----------------------------|--------------|----------------|
| E RES/REL  | 12.5  | 1.0-15K     | open     | 305                 | 0.688/17.46                    | 0.875/ 22.23               | 0.594/15.08                 | 1-6 oz. in.  | 300°           |
| E REE      | 12.5  | 1.0-15K     | enclosed | 305                 | 1.219/30.96                    | 1.047/ 26.59               | —                           | 1-6 oz. in.  | 300°           |

\* See Catalog #203 for complete details.

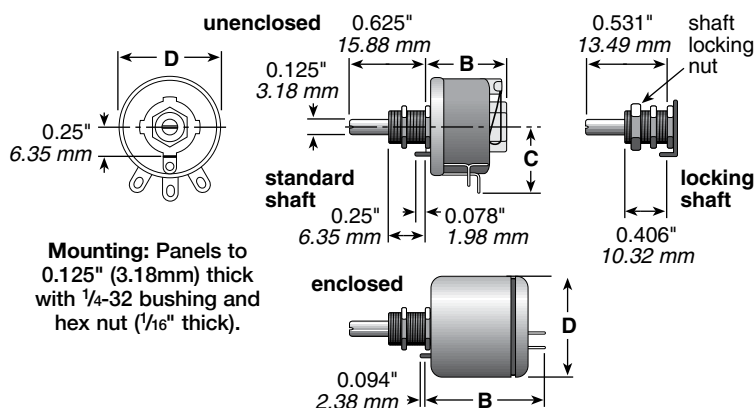

Dimensions for reference only; consult factory for details.

Since all rheostats/potentiometers are electro-mechanical devices, they are subject to mechanical wear and, therefore, have a finite life.

Models H, J, K, L and N are listed under UL File No. E-10946 and CSA File No. 21309 unless noted otherwise.

All rheostats are 10% tolerance.

# Rheostats

## (Potentiometers) Wirewound

### MODELS H, J, G, K, L

| Model | Type    | Watts | Ohmic range | Core | Max. Voltage (RMS)* | Behind panel "B" (in./mm Ref.) | Diameter "D" (in./mm Ref.) | Dimension "C" (in./mm Ref.) | Shaft torque     | Rotation (±5°) |
|-------|---------|-------|-------------|------|---------------------|--------------------------------|----------------------------|-----------------------------|------------------|----------------|
| H     | RHS/RHL | 25    | 1.0-25K     | open | 500                 | 1.375/34.93                    | 1.560/ 39.62               | 0.940/23.88                 | 0.25-0.5 lb. in. | 300°           |
| J     | RJS     | 50    | 0.5-50K     | open | 750                 | 1.375/34.93                    | 2.31 / 58.67               | 1.56 /39.62                 | 0.25-2 lb. in.   | 300°           |
| G     | RGS     | 75    | 0.5-50K     | open | 900                 | 1.750/44.45                    | 2.75 / 69.25               | 1.78 /45.21                 | 0.5-2 lb. in.    | 300°           |
| K     | RKS     | 100   | 0.5-50K     | open | 1000                | 1.750/44.45                    | 3.125/ 79.38               | 1.91 /48.51                 | 0.5-2 lb. in.    | 300°           |
| L     | RLS     | 150   | 0.5-50K     | open | 1200                | 2.000 / 50.8                   | 4.00 /101.60               | 2.28 /57.91                 | 0.5-3 lb. in.    | 300°           |

• Models H, J, G, and K also available in enclosed versions.

• See Catalog #203 for complete details.



**Mounting:** Panels to 0.25" (6.35mm) thick with 3/8-32 bushing and hex nut (3/32" thick) (or with 10-32 x 0.75 flat-head screws for model L only).

### MODELS P, N, R, U

| Model | Type | Watts | Ohmic range | Core | Max. Voltage (RMS)* | Behind panel "B" (in./mm Ref.) | Diameter "D" (in./mm Ref.) | Dimension "C" (in./mm Ref.) | Shaft torque  | Rotation (±5°) |
|-------|------|-------|-------------|------|---------------------|--------------------------------|----------------------------|-----------------------------|---------------|----------------|
| P     | RPS  | 225   | 1.0-30K     | open | 1300                | 2.125/53.98                    | 5.00 /127.00               | 2.97 /75.44                 | 2.5-4 lb. in. | 310°           |
| N     | RNS  | 300   | 1.0-50K     | open | 1225                | 2.375/60.33                    | 6.00 /152.40               | 3.44 /87.38                 | 2.5-5 lb. in. | 320°           |
| R     | RRS  | 500   | 1.0-20K     | open | 1450                | 2.125/53.98                    | 8.00 /203.20               | 4.31/109.47                 | 4.5-7 lb. in. | 325°           |
| U     | RUS  | 1000  | 1.0-20K     | open | 1600                | 3.000 / 76.2                   | 12.00 /304.80              | 6.38/162.05                 | 3.5-7 lb. in. | 335°           |

• See Catalog #203 for complete details.



(continued)

# Rheostats

## (Potentiometers) Wirewound

### ORDERING INFORMATION

| Code | Watts | Model | Shaft    | Core     |
|------|-------|-------|----------|----------|
| CL = | 7.5   | C     | Locking  | Enclosed |
| CS = | 7.5   | C     | Standard | Enclosed |
| EE = | 12.5  | E     | Locking  | Open     |
| EL = | 12.5  | E     | Standard | Open     |
| ES = | 12.5  | E     | Standard | Open     |
| GS = | 75    | G     | Standard | Open     |
| HL = | 25    | H     | Locking  | Open     |
| HS = | 25    | H     | Standard | Open     |
| JS = | 50    | J     | Standard | Open     |
| KS = | 100   | K     | Standard | Open     |
| LS = | 150   | L     | Standard | Open     |
| NS = | 300   | N     | Standard | Open     |
| PS = | 225   | P     | Standard | Open     |
| RS = | 500   | R     | Standard | Open     |
| US = | 1000  | U     | Standard | Open     |

Series —  
Rheostats  
Wirewound  
Potentiometers

E = RoHS compliant

**R C S R 5 0 E**

\*Check table for standard resistance values and maximum current values

#### Resistance Value\*

Example:  
R50 = 0.50Ω  
1R0 = 1Ω  
7R5 = 7.5Ω  
250 = 250Ω  
1K0 = 1,000Ω  
1K75 = 1,750Ω  
4K5 = 4,500Ω  
50K = 50,000Ω

• RoHS compliant product available. Add "E" suffix to part number to specify.

• Made-to-order rheostats available: Contact nearest Ohmite sales office.

\* Voltage rating dependent on resistance value.

| Ohmic value | Part No.<br>Prefix ➤<br>Suffix ▼ | 7.5W Model C      |                |           | 12.5W Model E     |                |                 | 25W Model H |                   |                | 50W<br>Model J | 75W<br>Model G | 100W<br>Model K | 150W<br>Model L | 225W<br>Model P | 300W<br>Model N | 500W<br>Model R | 1000W<br>Model U |      |
|-------------|----------------------------------|-------------------|----------------|-----------|-------------------|----------------|-----------------|-------------|-------------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|------|
|             |                                  | Std. shaft<br>RCS | Locking<br>RCL | Amps max. | Std. shaft<br>RES | Locking<br>REL | Enclosed<br>REE | Amps max.   | Std. shaft<br>RHS | Locking<br>RHL | Amps max.      | Amps max.      | Amps max.       | Amps max.       | Amps max.       | Amps max.       | Amps max.       | Amps max.        |      |
| 0.5 —R50    |                                  |                   |                |           | ✓                 | ✓              | ✓               | 3.53        | ✓                 | ✓              | 5.00           | ✓              | 10.0            | ✓               | 12.3            | ✓               | 14.1            | ✓                | 17.3 |
| 1 —1R0      |                                  |                   |                |           | ✓                 | ✓              | ✓               | 2.50        | ✓                 | ✓              | 3.54           | ✓              | 7.07            | ✓               | 8.66            | ✓               | 10              | ✓                | 12.3 |
| 1.5 —1R5    |                                  |                   |                |           | ✓                 | ✓              | ✓               | 2.24        | ✓                 | ✓              | 2.04           | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 2 —2R0      |                                  |                   |                |           | ✓                 | ✓              | ✓               | 1.58        | ✓                 | ✓              | 1.44           | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 2.5 —2R5    |                                  |                   |                |           | ✓                 | ✓              | ✓               | 1.25        | ✓                 | ✓              | 1.12           | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 3 —3R0      |                                  |                   |                |           | ✓                 | ✓              | ✓               | 0.91        | ✓                 | ✓              | 0.845          | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 4 —4R0      |                                  |                   |                |           | ✓                 | ✓              | ✓               | 0.71        | ✓                 | ✓              | 0.60           | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 5 —5R0      |                                  |                   |                |           | ✓                 | ✓              | ✓               | 0.50        | ✓                 | ✓              | 0.40           | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 6 —6R0      |                                  |                   |                |           | ✓                 | ✓              | ✓               | 0.36        | ✓                 | ✓              | 0.32           | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 7.5 —7R5    |                                  |                   |                |           | ✓                 | ✓              | ✓               | 0.29        | ✓                 | ✓              | 0.25           | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 8 —8R0      |                                  | ✓                 | ✓              | 0.86      | ✓                 | ✓              | ✓               | 0.22        | ✓                 | ✓              | 0.19           | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 10 —10R     |                                  | ✓                 | ✓              | 0.71      | ✓                 | ✓              | ✓               | 0.16        | ✓                 | ✓              | 0.13           | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 12 —12R     |                                  | ✓                 | ✓              | 0.55      | ✓                 | ✓              | ✓               | 0.10        | ✓                 | ✓              | 0.086          | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 12.5 —12R5  |                                  | ✓                 | ✓              | 0.46      | ✓                 | ✓              | ✓               | 0.071       | ✓                 | ✓              | 0.060          | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 15 —15R     |                                  | ✓                 | ✓              | 0.39      | ✓                 | ✓              | ✓               | 0.050       | ✓                 | ✓              | 0.040          | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 16 —16R     |                                  | ✓                 | ✓              | 0.32      | ✓                 | ✓              | ✓               | 0.036       | ✓                 | ✓              | 0.032          | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 22 —22R     |                                  | ✓                 | ✓              | 0.27      | ✓                 | ✓              | ✓               | 0.029       | ✓                 | ✓              | 0.025          | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 25 —25R     |                                  | ✓                 | ✓              | 0.22      | ✓                 | ✓              | ✓               | 0.022       | ✓                 | ✓              | 0.019          | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 35 —35R     |                                  | ✓                 | ✓              | 0.17      | ✓                 | ✓              | ✓               | 0.016       | ✓                 | ✓              | 0.013          | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 40 —40R     |                                  | ✓                 | ✓              | 0.15      | ✓                 | ✓              | ✓               | 0.013       | ✓                 | ✓              | 0.010          | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 50 —50R     |                                  | ✓                 | ✓              | 0.12      | ✓                 | ✓              | ✓               | 0.010       | ✓                 | ✓              | 0.0086         | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 75 —75R     |                                  | ✓                 | ✓              | 0.086     | ✓                 | ✓              | ✓               | 0.0071      | ✓                 | ✓              | 0.0060         | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 80 —80R     |                                  | ✓                 | ✓              | 0.071     | ✓                 | ✓              | ✓               | 0.0060      | ✓                 | ✓              | 0.0050         | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 100 —100R   |                                  | ✓                 | ✓              | 0.060     | ✓                 | ✓              | ✓               | 0.0050      | ✓                 | ✓              | 0.00445        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 125 —125R   |                                  | ✓                 | ✓              | 0.050     | ✓                 | ✓              | ✓               | 0.00445     | ✓                 | ✓              | 0.00375        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 150 —150R   |                                  | ✓                 | ✓              | 0.040     | ✓                 | ✓              | ✓               | 0.00375     | ✓                 | ✓              | 0.00316        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 160 —160R   |                                  | ✓                 | ✓              | 0.039     | ✓                 | ✓              | ✓               | 0.00316     | ✓                 | ✓              | 0.00267        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 175 —175R   |                                  | ✓                 | ✓              | 0.032     | ✓                 | ✓              | ✓               | 0.00267     | ✓                 | ✓              | 0.00222        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 200 —200R   |                                  | ✓                 | ✓              | 0.027     | ✓                 | ✓              | ✓               | 0.00222     | ✓                 | ✓              | 0.00182        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 225 —225R   |                                  | ✓                 | ✓              | 0.022     | ✓                 | ✓              | ✓               | 0.00182     | ✓                 | ✓              | 0.00150        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 250 —250R   |                                  | ✓                 | ✓              | 0.017     | ✓                 | ✓              | ✓               | 0.00150     | ✓                 | ✓              | 0.00123        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 300 —300R   |                                  | ✓                 | ✓              | 0.012     | ✓                 | ✓              | ✓               | 0.00123     | ✓                 | ✓              | 0.00100        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 325 —325R   |                                  | ✓                 | ✓              | 0.011     | ✓                 | ✓              | ✓               | 0.00111     | ✓                 | ✓              | 0.00091        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 350 —350R   |                                  | ✓                 | ✓              | 0.010     | ✓                 | ✓              | ✓               | 0.00100     | ✓                 | ✓              | 0.000845       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 400 —400R   |                                  | ✓                 | ✓              | 0.0086    | ✓                 | ✓              | ✓               | 0.000845    | ✓                 | ✓              | 0.00071        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 500 —500R   |                                  | ✓                 | ✓              | 0.0071    | ✓                 | ✓              | ✓               | 0.00071     | ✓                 | ✓              | 0.00060        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 600 —600R   |                                  | ✓                 | ✓              | 0.0060    | ✓                 | ✓              | ✓               | 0.00060     | ✓                 | ✓              | 0.00050        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 700 —700R   |                                  | ✓                 | ✓              | 0.0050    | ✓                 | ✓              | ✓               | 0.00050     | ✓                 | ✓              | 0.000445       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 750 —750R   |                                  | ✓                 | ✓              | 0.00445   | ✓                 | ✓              | ✓               | 0.000445    | ✓                 | ✓              | 0.000375       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 800 —800R   |                                  | ✓                 | ✓              | 0.0040    | ✓                 | ✓              | ✓               | 0.00040     | ✓                 | ✓              | 0.00033        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 900 —900R   |                                  | ✓                 | ✓              | 0.0036    | ✓                 | ✓              | ✓               | 0.00036     | ✓                 | ✓              | 0.00030        | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 1000 —1K0   |                                  | ✓                 | ✓              | 0.0032    | ✓                 | ✓              | ✓               | 0.00032     | ✓                 | ✓              | 0.000267       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 1200 —1K2   |                                  | ✓                 | ✓              | 0.0027    | ✓                 | ✓              | ✓               | 0.00027     | ✓                 | ✓              | 0.000222       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 1250 —1K25  |                                  | ✓                 | ✓              | 0.0025    | ✓                 | ✓              | ✓               | 0.00025     | ✓                 | ✓              | 0.000208       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 1500 —1K5   |                                  | ✓                 | ✓              | 0.0022    | ✓                 | ✓              | ✓               | 0.00022     | ✓                 | ✓              | 0.000182       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 1600 —1K6   |                                  | ✓                 | ✓              | 0.0020    | ✓                 | ✓              | ✓               | 0.00020     | ✓                 | ✓              | 0.000167       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 1750 —1K75  |                                  | ✓                 | ✓              | 0.0018    | ✓                 | ✓              | ✓               | 0.00018     | ✓                 | ✓              | 0.000150       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 1800 —1K8   |                                  | ✓                 | ✓              | 0.0017    | ✓                 | ✓              | ✓               | 0.00017     | ✓                 | ✓              | 0.000141       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 2000 —2K0   |                                  | ✓                 | ✓              | 0.0015    | ✓                 | ✓              | ✓               | 0.00015     | ✓                 | ✓              | 0.000123       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 2250 —2K25  |                                  | ✓                 | ✓              | 0.0014    | ✓                 | ✓              | ✓               | 0.00014     | ✓                 | ✓              | 0.000111       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 2500 —2K5   |                                  | ✓                 | ✓              | 0.0012    | ✓                 | ✓              | ✓               | 0.00012     | ✓                 | ✓              | 0.000100       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 3000 —3K0   |                                  | ✓                 | ✓              | 0.0010    | ✓                 | ✓              | ✓               | 0.00010     | ✓                 | ✓              | 0.000086       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 3500 —3K5   |                                  | ✓                 | ✓              | 0.0009    | ✓                 | ✓              | ✓               | 0.00009     | ✓                 | ✓              | 0.000075       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 4500 —4K5   |                                  | ✓                 | ✓              | 0.0008    | ✓                 | ✓              | ✓               | 0.00008     | ✓                 | ✓              | 0.000067       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 5000 —5K0   |                                  | ✓                 | ✓              | 0.0007    | ✓                 | ✓              | ✓               | 0.00007     | ✓                 | ✓              | 0.000060       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 7500 —7K5   |                                  | ✓                 | ✓              | 0.0006    | ✓                 | ✓              | ✓               | 0.00006     | ✓                 | ✓              | 0.000050       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 8000 —8K0   |                                  | ✓                 | ✓              | 0.0005    | ✓                 | ✓              | ✓               | 0.00005     | ✓                 | ✓              | 0.0000445      | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 10000 —10K  |                                  | ✓                 | ✓              | 0.0004    | ✓                 | ✓              | ✓               | 0.00004     | ✓                 | ✓              | 0.000033       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 12500 —12K5 |                                  | ✓                 | ✓              | 0.0003    | ✓                 | ✓              | ✓               | 0.00003     | ✓                 | ✓              | 0.000025       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 15000 —15K  |                                  | ✓                 | ✓              | 0.0003    | ✓                 | ✓              | ✓               | 0.00003     | ✓                 | ✓              | 0.000022       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 20000 —20K  |                                  | ✓                 | ✓              | 0.0002    | ✓                 | ✓              | ✓               | 0.00002     | ✓                 | ✓              | 0.000017       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 25000 —25K  |                                  | ✓                 | ✓              | 0.0002    | ✓                 | ✓              | ✓               | 0.00002     | ✓                 | ✓              | 0.000015       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 30000 —30K  |                                  | ✓                 | ✓              | 0.0001    | ✓                 | ✓              | ✓               | 0.00001     | ✓                 | ✓              | 0.000012       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 40000 —40K  |                                  | ✓                 | ✓              | 0.0001    | ✓                 | ✓              | ✓               | 0.00001     | ✓                 | ✓              | 0.000010       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |
| 50000 —50K  |                                  | ✓                 | ✓              | 0.0001    | ✓                 | ✓              | ✓               | 0.00001     | ✓                 | ✓              | 0.000009       | ✓              | 5.00            | ✓               | 6.12            | ✓               | 7.07            | ✓                | 8.65 |

✓ = Standard values; check availability  
Rheostats are silicone-ceramic coated at and above the following ohmic values:  
Model C: all  
Model E: 750Ω  
Model H: 2000Ω  
Model J: 5000Ω  
Model G: 5000Ω  
Model K: 5000Ω  
Model L: 7500Ω

✓ = Standard values; check availability  
Rheostats are silicone-ceramic coated at and above the following ohmic values:  
Model C: all  
Model E: 750Ω  
Model H: 2000Ω  
Model J: 5000Ω  
Model G: 5000Ω  
Model K: 5000Ω  
Model L: 7500Ω

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9