

### CA Varistor Series



#### Description

The CA Series of transient surge suppressors are industrial high-energy disc varistors (MOVs) intended for special applications requiring unique electrical contact or packaging methods provided by the customer. The electrode finish of these devices is solderable and can also be used with pressure contacts. Discs of the same diameter may be stacked.

This series of industrial disc varistors are nominal 60mm diameter, with disc thickness ranging from 2.7mm to 32mm. The voltage range is 250V to 2800 V<sub>(AC)RMS</sub>.

For information on soldering considerations, refer to EC637 "Recommendations for Soldering Terminal Leads to MOV Varistor Discs."

#### Features

- Standard disc size nominal 60mm diameter
- Discs have edge passivation insulation
- High peak pulse current range 50000A to 70000A
- Very high-energy capability  $W_{tm}$  880J to 10000J

#### Absolute Maximum Ratings

• For ratings of individual members of a series, see Device Ratings and Specifications chart

| Continuous                                                                                  | CA Series        | Units |
|---------------------------------------------------------------------------------------------|------------------|-------|
| Steady State Applied Voltage:                                                               |                  |       |
| AC Voltage Range (V <sub>M(AC)RMS</sub> )                                                   | 250 to 2800      | V     |
| DC Voltage Range (V <sub>M(DC)</sub> )                                                      | 330 to 3500      | V     |
| Transient:                                                                                  |                  |       |
| Peak Pulse Current (I <sub>TM</sub> )                                                       |                  |       |
| For 8/20μs Current Wave(See Figure 2)                                                       | 20,000 to 70,000 | A     |
| Single-Pulse Energy Range                                                                   |                  |       |
| For 2ms Current Square Wave (W <sub>TM</sub> )                                              | 880 to 10,000    | J     |
| Operating Ambient Temperature Range (T <sub>A</sub> )                                       | -55 to +85       | °C    |
| Storage Temperature Range (T <sub>STG</sub> )                                               | - 55 to +85      | °C    |
| Temperature Coefficient (V) of Clamping Voltage (V <sub>C</sub> ) at Specified Test Current | <0.01            | %/°C  |

**CAUTION:** Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

### CA Series Ratings & Specifications

| Part Number<br>Device Branding | Size<br><br>(mm) | Maximum Rating (85°C) |                    |                 |                             | Specifications (25°C)                      |                  |      |                                                                    |                                        |
|--------------------------------|------------------|-----------------------|--------------------|-----------------|-----------------------------|--------------------------------------------|------------------|------|--------------------------------------------------------------------|----------------------------------------|
|                                |                  | Continuous            |                    | Transient       |                             | Varistor Voltage at 1mA<br>DC Test Current |                  |      | Max Clamping<br>Volt V <sub>C</sub> at 200A<br>Current<br>(8/20μs) | Typical<br>Capacitance<br><br>f = 1MHz |
|                                |                  | V <sub>RMS</sub>      | V <sub>DC</sub>    | Energy<br>(2ms) | Peak<br>Current<br>(8/20μs) |                                            |                  |      |                                                                    |                                        |
|                                |                  | V <sub>M(AC)</sub>    | V <sub>M(DC)</sub> | W <sub>TM</sub> | I <sub>TM</sub>             | Min                                        | V <sub>NOM</sub> | Max  | V <sub>C</sub>                                                     | (pF)                                   |
| V251CA60                       | 60               | 250                   | 330                | 880             | 50000                       | 354                                        | 390              | 429  | 620                                                                | 10000                                  |
| V271CA60                       | 60               | 275                   | 369                | 950             | 50000                       | 389                                        | 430              | 473  | 680                                                                | 9000                                   |
| V321CA60                       | 60               | 320                   | 420                | 1100            | 50000                       | 462                                        | 510              | 561  | 760                                                                | 7500                                   |
| V421CA60                       | 60               | 420                   | 560                | 1500            | 70000                       | 610                                        | 680              | 748  | 1060                                                               | 6000                                   |
| V481CA60                       | 60               | 480                   | 640                | 1600            | 70000                       | 670                                        | 750              | 825  | 1160                                                               | 5500                                   |
| V511CA60                       | 60               | 510                   | 675                | 1800            | 70000                       | 735                                        | 820              | 910  | 1300                                                               | 5000                                   |
| V571CA60                       | 60               | 575                   | 730                | 2100            | 70000                       | 805                                        | 910              | 1000 | 1420                                                               | 4500                                   |
| V661CA60                       | 60               | 660                   | 850                | 2300            | 70000                       | 940                                        | 1050             | 1160 | 1640                                                               | 4000                                   |
| V751CA60                       | 60               | 750                   | 970                | 2600            | 70000                       | 1080                                       | 1200             | 1320 | 1880                                                               | 3500                                   |
| V881CA60                       | 60               | 880                   | 1150               | 3200            | 70000                       | 1290                                       | 1500             | 1650 | 2340                                                               | 2700                                   |
| V112CA60                       | 60               | 1100                  | 1400               | 3800            | 70000                       | 1620                                       | 1800             | 2060 | 2940                                                               | 2200                                   |
| V142CA60                       | 60               | 1400                  | 1750               | 5000            | 70000                       | 2020                                       | 2200             | 2550 | 3600                                                               | 1800                                   |
| V172CA60                       | 60               | 1700                  | 2150               | 6000            | 70000                       | 2500                                       | 2700             | 3030 | 4300                                                               | 1500                                   |
| V202CA60                       | 60               | 2000                  | 2500               | 7500            | 70000                       | 2970                                       | 3300             | 3630 | 5200                                                               | 1200                                   |
| V242CA60                       | 60               | 2400                  | 3000               | 8800            | 70000                       | 3510                                       | 3900             | 4290 | 6200                                                               | 1000                                   |
| V282CA60                       | 60               | 2800                  | 3500               | 10000           | 70000                       | 4230                                       | 4700             | 5170 | 7400                                                               | 800                                    |

NOTE: Average power dissipation of transients should not exceed 2.5W for CA60 discs.

### Power Dissipation Ratings



Figure 1

Should transients occur in rapid succession, the average power dissipation result is the energy (watt-seconds) per pulse times the number of pulses per second. The power so developed must be within the specifications shown on the Device Ratings and Specifications table for the specific device. Furthermore, the operating values need to be derated at high temperatures as shown in above. Because varistors can only dissipate a relatively small amount of average power they are, therefore, not suitable for repetitive applications that involve substantial amounts of average power dissipation.

### Peak Pulse Current Test Waveform

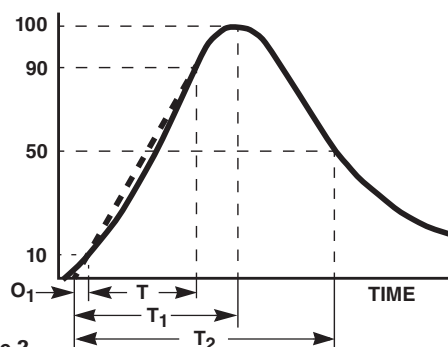


Figure 2

O<sub>1</sub> = Virtual Origin of Wave  
 T = Time from 10% to 90% of Peak  
 T<sub>1</sub> = Rise Time = 1.25 x T  
 T<sub>2</sub> = Decay Time

**Example** - For an 8/20 μs Current Waveform:

8μs = T<sub>1</sub> = Rise Time

20μs = T<sub>2</sub> = Decay Time

### Maximum Clamping Voltage for 60mm Parts

#### V251CA60 - V881CA60

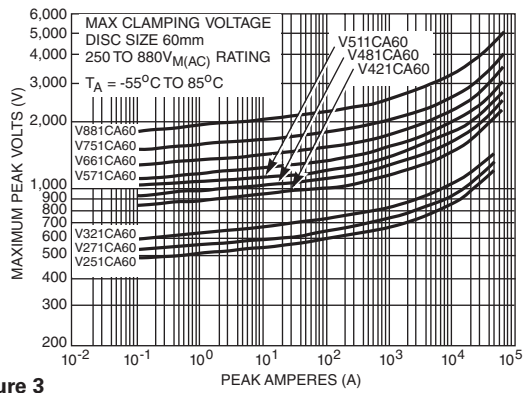


Figure 3

### Repetitive Surge Capability for 60mm Parts

#### V251CA60 - V321CA60

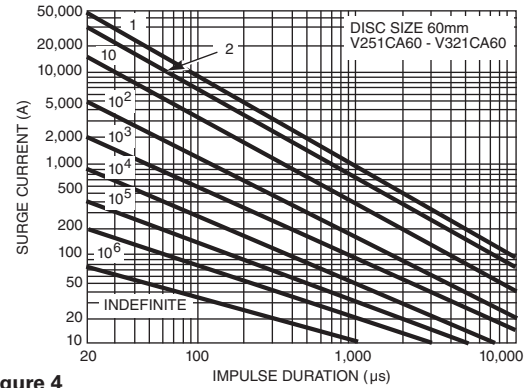


Figure 4

#### V112CA60 - V282CA60

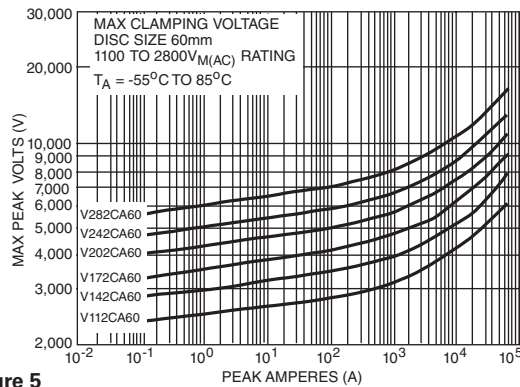


Figure 5

#### V421CA60 - V282CA60

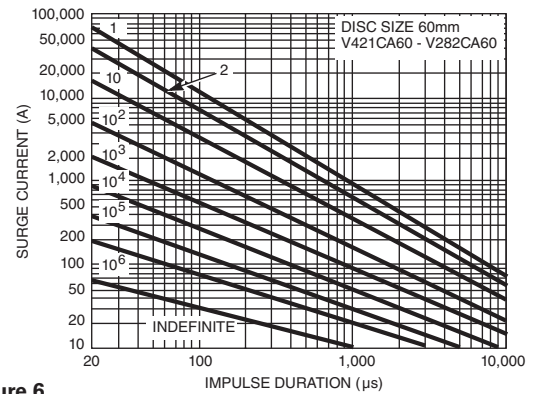



Figure 6

NOTE: If pulse ratings are exceeded, a shift of  $V_{NIDC}$  (at specified current) of more than  $\pm 10\%$  could result. This type of shift, which normally results in a decrease of  $V_{NIDC}$ , may result in the device not meeting the original published specifications, but does not prevent the device from continuing to function, and to provide ample protection.

### Physical Specifications

|                                  |                                            |
|----------------------------------|--------------------------------------------|
| <b>Soldering Characteristics</b> | Solderability per MIL-STD-202, Method 208E |
| <b>Insulating Material</b>       | glass passivation on edge only             |
| <b>Device Labeling</b>           | none                                       |

### Product Dimensions (mm)

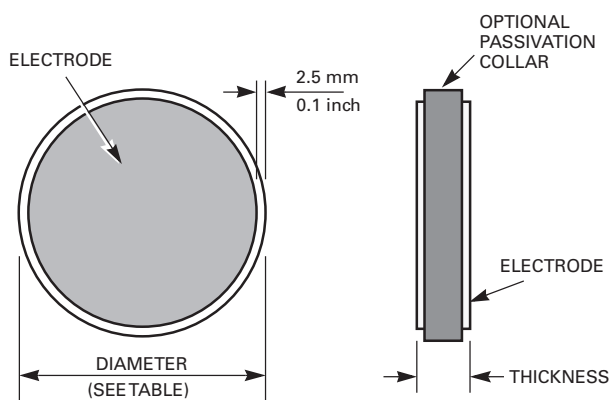

| Model Size | Disc Diameter |      |        |       |
|------------|---------------|------|--------|-------|
|            | Millimeters   |      | Inches |       |
|            | Min           | Max  | Min    | Max   |
| 60         | 58.0          | 62.0 | 2.283  | 2.441 |

| Model<br>$V_{RMS}$<br>$V_{M(AC)}$ | Disc Thickness |      |        |       |
|-----------------------------------|----------------|------|--------|-------|
|                                   | Millimeters    |      | Inches |       |
|                                   | Min.           | Max. | Min.   | Max.  |
| 250                               | 2.0            | 2.7  | 0.079  | 0.106 |
| 275                               | 2.2            | 3.0  | 0.087  | 0.118 |
| 320                               | 2.6            | 3.5  | 0.102  | 0.138 |
| 420                               | 3.5            | 4.7  | 0.138  | 0.185 |
| 510                               | 4.2            | 5.7  | 0.165  | 0.224 |
| 575                               | 4.6            | 6.3  | 0.181  | 0.248 |
| 660                               | 5.3            | 7.2  | 0.209  | 0.283 |
| 750                               | 6.1            | 8.3  | 0.240  | 0.327 |
| 880                               | 7.3            | 10.3 | 0.287  | 0.406 |
| 1100                              | 9.2            | 13.0 | 0.362  | 0.512 |
| 1400                              | 11.5           | 16.0 | 0.453  | 0.630 |
| 1700                              | 14.0           | 19.0 | 0.551  | 0.748 |
| 2000                              | 17.0           | 22.5 | 0.669  | 0.886 |
| 2400                              | 20.0           | 27.0 | 0.787  | 1.063 |
| 2800                              | 24.0           | 32.0 | 0.945  | 1.260 |

### Environmental Specifications

|                                      |                                                            |
|--------------------------------------|------------------------------------------------------------|
| <b>Operating/Storage Temperature</b> | -55°C to +85°C                                             |
| <b>Humidity Aging</b>                | +85°C, 85% RH, 1000 hours<br>+/-10% typical voltage change |
| <b>Thermal Shock</b>                 | +85°C to -55°C 10 times<br>+/-10% typical voltage change   |
| <b>Solvent Resistance</b>            | MIL-STD-202, Method 215F                                   |
| <b>Moisture Sensitivity</b>          | Level 1, J-STD-020C                                        |

### Weight

| Model Number | Typical Discweight (Grams) |
|--------------|----------------------------|
| V251CA60     | 39                         |
| V271CA60     | 42                         |
| V321CA60     | 50                         |
| V421CA60     | 66                         |
| V481CA60     | 71                         |
| V511CA60     | 80                         |
| V571CA60     | 88                         |
| V661CA60     | 101                        |
| V751CA60     | 116                        |
| V881CA60     | 141                        |
| V112CA60     | 178                        |
| V142CA60     | 220                        |
| V172CA60     | 265                        |
| V202CA60     | 317                        |
| V242CA60     | 377                        |
| V282CA60     | 450                        |

### Passivation Layer

The standard CA Series is supplied with passivation layer around the outside perimeter of the disc forming an electrical insulator as detailed in the dimensional drawing. For other options contact factory. (See Ordering Information)


### Encapsulated Recommendations

After lead attachment, the disc/lead assembly may be coated or encapsulated in a package to provide electrical insulation and isolation from environmental contamination as required by the application. Coating/Filler materials for containers may include silicones, polyurethanes, and some epoxy resins. Materials containing halogens, sulfides, or alkalines are not recommended.

### Stacking and Contact Pressure Recommendations

When applications require the stacking of CA60 discs, or when an electrical connection is made by pressure contacts, the pressure applied to the CA60 disc electrode surface should be minimum 2.2kgs (5 pounds) and maximum 4N/CM<sup>2</sup> (5.7LBs/IN<sup>2</sup>).


### Part Numbering System

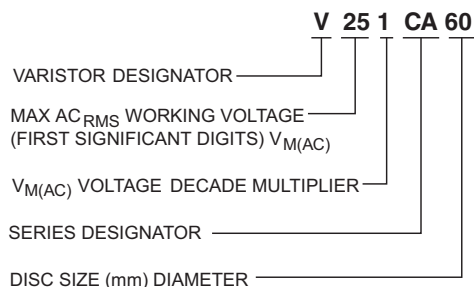

### Electrode Metallization

CA60 discs are supplied as standard with sintered Silver electrodes. For other available options please contact Littelfuse.

### Recommended Reflow Temperature Profile

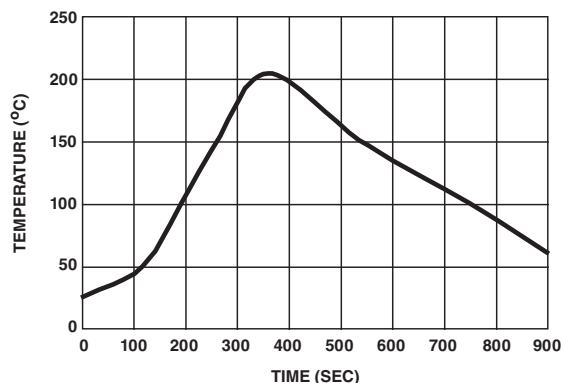

### Packaging and Shipping

The CA Series is supplied in bulk for shipment. Discs are packaged in compartmentalized cartons to protect from scratching or edge-chipping during shipment.

No branding or any other type of marking appears on the CA disc itself.

CA60 discs are supplied as standard with sintered Silver electrodes and glass passivation. For other available options please contact factory.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9