


IndustrialNet™ M12 D-Code Category 5e Overmolded Cordsets

specifications

Industrial Ethernet cordsets shall be constructed of Category 5e, industrial grade, stranded, twisted pair cable for UTP and STP installations. Each cordset shall be pre-terminated and overmolded to include Category 5e M12 or RJ45 industrial plugs on each end which are wired according to the T568B and IEC 60603-7-41 standards.

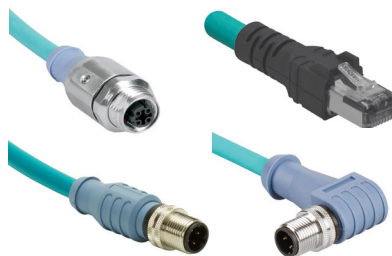

technical information

| | |
|--|--|
| Category 5e/ Class D channel and component performance: | Exceeds channel and component requirements of ANSI/TIA-556-C.2 Category 5e and ISO11801 Class D standards at swept frequencies of 1 to 100 MHz |
| FCC and ANSI compliance: | Meets ANSI/TIA-1096-A; contacts plated with 50 micro-inches of gold for superior performance |
| IEC compliance: | <ul style="list-style-type: none"> • ANSI/TIA 568-C.2: Category 5e • ISO 11801 Class D standards at swept frequencies up to 100 MHz • ANSI/TIA-1005-A: Telecommunications Infrastructure Standard for Industrial Premises. • IEC 61076-2-101 Connectors for Electronic Equipment: Circular connectors – Detail specification for connectors with M 12 x 1 screw-locking, for data transmission frequencies up to 100 MHz |
| IP compliance: | Rated IP67/68 for dust protection and temporary liquid immersion. 10 million plus flex cycles |
| NEMA/UL compliance: | NEMA, 1, 3, 4, 6, 6P and IEC IP67/68, UL Type 12 |
| PoE compliance: | Meets IEEE 802.3af and IEEE 802.3at for PoE applications |
| RoHS compliance: | Compliant |
| Temperature rating: | -40° to +75°C (32° to +167°F) |
| Materials: | Constructed of 24 AWG UTP or STP stranded industrial grade TPE cable and IP67/68 overmolded connectors; Coupling nut: nickel plated over copper-zinc alloy; Contact pins: gold plated over copper-zinc alloy |

key features and benefits

| | |
|-----------------------------------|---|
| IP/NEMA/UL/CE rated | Withstands light wash down and temporary submerged conditions without loss of performance to ensure reliability in harsh factory environments |
| TPE jacket | Protects cable against weld splatter, chemicals and abrasions; suitable for high-flex applications for increased reliability |
| Factory terminated | Helps reduce termination errors in the field; assures reliability and saves time |
| Extended temperature range | Provides durable connection in extreme conditions to increase system reliability |
| Robust construction | Rated to 10 million flex cycles, providing durability and reliability |
| Optional RJ45 connector | Offers industry standard solution familiar to end users to speed deployment |

applications

IndustrialNet™ M12 D-Code Category 5e Overmolded Cordsets provide fast, reliable connections from machines and devices to switches and enclosures on the plant floor for Ethernet, PROFINET, Modbus and EtherCAT. The cordsets are rated to IP67/68, NEMA 1,3,4,6,6P, UL and M.I.C.E., ensuring high

performance and longevity under harsh environmental conditions. In mated conditions, these cordsets can withstand high temperature and high vibration commonly found in harsh industrial applications such as automotive, food and beverage, oil and gas, transportation and mining.

IndustrialNet™ M12 D-Code Category 5e Overmolded Cordsets

M12 bulkhead female D-code, STP, teal: ICD45T1NTL0.5M

M12 bulkhead female D-code, RJ45 plug, STP, teal: *ICD44T1NTL1M

M12 male D-code, straight connector, STP, teal: *ICD15T2NTL1M

M12 female D-Code, straight connector, STP, teal: *ICD35T2NTL1M

M12 male D-Code, angled connector, STP, teal: *ICD25T2NTL1M

M12 male to male D-Code, straight connector, UTP, teal: *ICD11T2NTL1M

M12 male to male D-Code, straight connector, STP, teal: *ICD11T1NTL1M

M12 male to male D-Code, angled connector, STP, teal: *ICD22T1NTL1M

M12 male D-Code, straight connector, RJ45 plug, STP, teal: *ICD14T1NTL1M

Accessories

IndustrialNet™ M12 D-Code female to RJ45 jack panel mount adapter: ICAM12DRJS

IndustrialNet™ Category 5e M12 D-Code field terminable plug: ISPS5E44MFA

IndustrialNet™ Copper Cable

Category 5e, SF/UTP, 24/7 AWG stranded, CM 2-pair: ISFCH5C02A**-XG

*For other lengths, change the length designation (1M) of the part number to the desired standard length (.5M, 2M, 3M, 5M, 10M, 15M or 20M).

** To designate color, add suffix TL (Teal), BL (Black), RD (Red), BU (Blue), GY (Gray), or YL (Yellow).

IndustrialNet™ M12 D-Code Category 5e Overmolded Cordsets

ICD45T1NTL0.5M



ICD44T1NTL



ICD15T2NTL



ICD35T2NTL



ICD25T2NTL



ICD11T2NTL



ICD11T1NTL



ICD22T1NTL



ICD14T1NTL



WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300



©2018 Panduit Corp.
ALL RIGHTS RESERVED.
COSP425--WW-ENG
2/2018

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9