



Specification

Part No. : **FNS.01.1F11**

Description : Shockwave Scout FirstNet Band 14 Terminal Robust

Antenna N Type(M) Small Thread

Features : Applicable for First Net Band 14

Over 50% efficiency and 2.3 dBi gain

Mechanically robust for indoor/outdoor applications

Height: 79.45mm (3.13")
Diameter: 42mm (1.65")
IP67 and IP69K Waterproof

N type(M) connector

RoHS compliant







1. Introduction

The Shockwave Response FNS.01.1F11 is a permanent mount, waterproof, external antenna operating at band 14 for FirstNet specific uses with an N type male connector. It has been designed to be used on a Ground Plane.

FirstNet is a dedicated communications tool for First Responders in the US. It is an isolated network to provide faster critical information and data-sharing between First Responders and their agencies. New FirstNet devices are being deployed to allow for the multitude of services and applications which will be using the network for the following mission critical applications:

- Computer-aided dispatch (vehicle location)
- EMS Electronic Patient Care Reporting
- Vehicle Mounted RMS/ Citations/ Scanners
- Video Streaming

This antenna has superior performance over wide-bands compared to traditional whip antennas. Up to 90% efficiency and with a minimum 2.3dBi peak gain over all cellular bands result when mounted on a 30x30 cm ground plane. Stable radiation patterns over low angles provide consistent gain in the horizontal plane, meaning that it is especially suitable for cellular applications.

A unique indent tab on the base of the antenna allows a wrench to be used to solidly lock the antenna on top of its mounting location, where an N type female connector juts out from a metal panel. Waterproof O-rings around the bottom base prevent water from leaking under the antenna.

The FNS.01.1F11 antenna is IP67 waterproof and IP69K resistant against high pressure water jets in commercial cleaning environments, which makes the antenna ideal for FirstNet Band 14 applications either in indoor or in harsh outdoor environments.





2. Specification

ELECTRICAL										
Operation Bands	LTE	GSM850	GSM900	GPS	DCS	PCS	WCDMA I	LTE	LTE 2300	LTE 3500
Frequency (MHz)	698~803	824~896	880~960	1575.4 2	1710~ 1880	1850~ 1990	1920~2 170	2300~2 700	2305 ~2360	3400 ~3600
Efficiency (%)	95.20	85.53	83.23	55.14	70.11	62.73	61.41	54.23		
Peak Gain (dBi)	3.10	3.11	3.29	0.29	3.31	2.60	2.29	4.02		
Average Gain (dBi)	-0.21	-0.68	-0.80	-2.58	-1.55	-2.02	-2.12	-2.77		
Return Loss (dB)	<-6	<-10	<-8	<-5	<-6	<-6	<-6	<-7		
Impedance		50 Ω								
Polarization	Vertical									
Radiation Property	Omni-Directional									
Max Input Power	100W									
MECHANICAL										
Dimension (mm)	Height: 79.45mm(3.13"); Diameter: 42mm(1.65")									
Connector	N type (M)									
Material	Housing: UV Resistant ABS, Base: Nickel Plated Zinc Alloy									
Weight (g)	130									
Rec. Torque for Mounting	4.018 N·m									
Max. Torque for Mounting	9.8 N·m									
ENVIRONMENTAL										
Waterproof Rating	IP67 and IP69K									
Operation Temperature	-40°C to 85°C									
Humidity	Non-condensing 65°C 95% RH									

• The antenna performance was measured on a 30cm*30cm ground plane.





LTE BANDS								
Band Number	LTE / LTE-Advanced	/ WCDMA / HSPA / HSPA+	/ TD-SCDMA					
	Uplink	Downlink	Covered					
1	UL: 1920 to 1980	DL: 2110 to 2170	✓					
2	UL: 1850 to 1910	DL: 1930 to 1990	✓					
3	UL: 1710 to 1785	DL: 1805 to 1880	✓					
4	UL: 1710 to 1755	DL: 2110 to 2155	✓					
5	UL: 824 to 849	DL: 869 to 894	✓					
7	UL: 2500 to 2570	DL:2620 to 2690	✓					
8	UL: 880 to 915	DL: 925 to 960	✓					
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓					
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✓					
12	UL: 699 to 716	DL: 729 to 746	✓					
13	UL: 777 to 787	DL: 746 to 756	✓					
14	UL: 788 to 798	DL: 758 to 768	✓					
17	UL: 704 to 716	DL: 734 to 746 (LTE only)	✓					
18	UL: 815 to 830	DL: 860 to 875 (LET only)	✓					
19	UL: 830 to 845	DL: 875 to 890	✓					
20	UL: 832 to 862	DL: 791 to 821	✓					
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✓					
22	UL: 3410 to 3490	DL: 3510 to 3590	×					
23	UL:2000 to 2020	DL: 2180 to 2200 (LTE only)	✓					
24	UL:1625.5 to 1660.5	DL: 1525 to 1559 (LTE only)	✓					
25	UL: 1850 to 1915	DL: 1930 to 1995	✓					
26	UL: 814 to 849	DL: 859 to 894	✓					
27	UL: 807 to 824	DL: 852 to 869 (LTE only)	✓					
28	UL: 703 to 748	DL: 758 to 803 (LTE only)	✓					
29	UL: -	DL: 717 to 728 (LTE only)	✓					
30	UL: 2305 to 2315	DL: 2350 to 2360 (LTE only)	✓					
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5 (LTE only)	×					
32	UL: -	DL: 1452 - 1496	×					
35	1850 t	✓						
38	2570 t	✓						
39	1880 t	✓						
40	2300 to 2400 ✓							
41	2496 to 2690 ✓							
42	3400 to 3600 ×							
43	3600 t	×						


^{*}Covered bands represent an efficiency greater than 20%






3. Antenna Characteristics

3.1. Return Loss

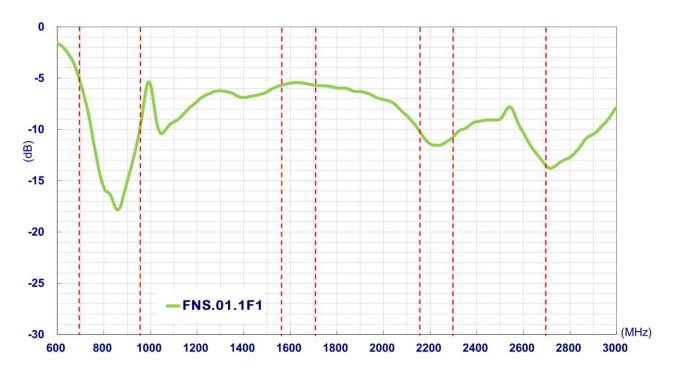

3.2. Efficiency

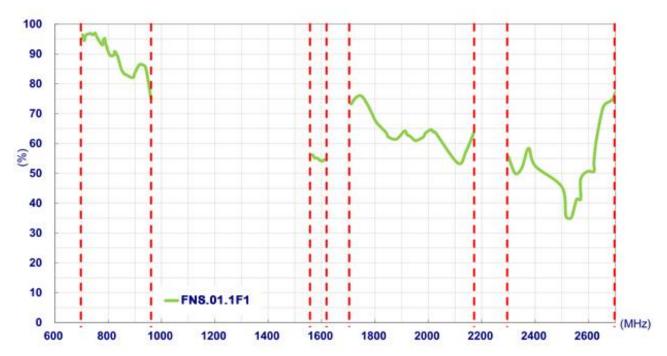


SPE-18-8-076/A/TH Page 5 of 15






3.3. Average Gain

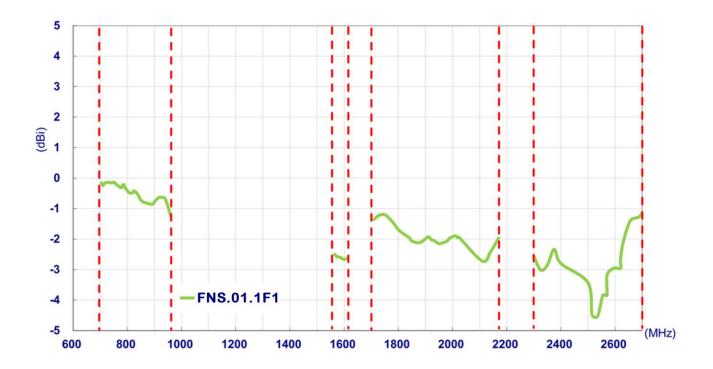

3.4. Peak Gain

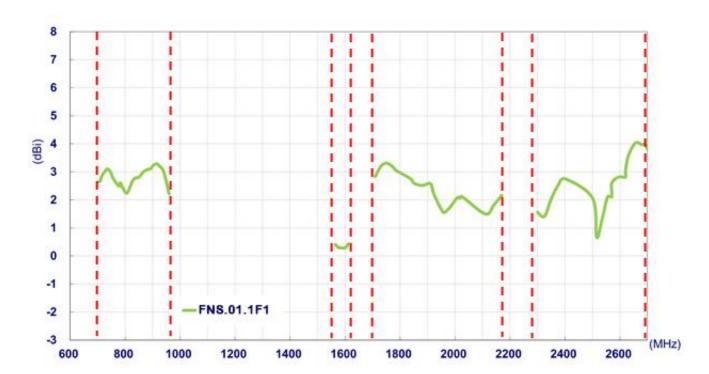

SPE-18-8-076/A/TH Page 6 of 15






4. Antenna Radiation Pattern

4.1. Measurement Setup

The FNS.01 antenna is tested in a CTIA certified ETS-Lindgren Anechoic Chamber. The test setup is shown below.

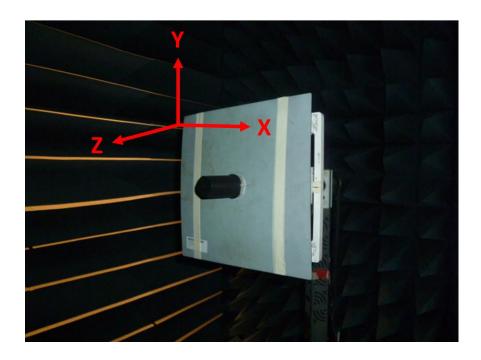







4.2. 2D Radiation Pattern



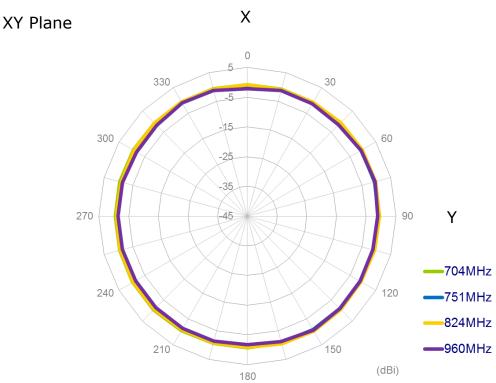

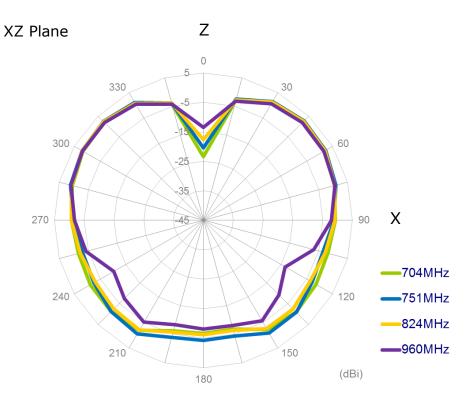


SPE-18-8-076/A/TH Page 8 of 15





YZ Plane

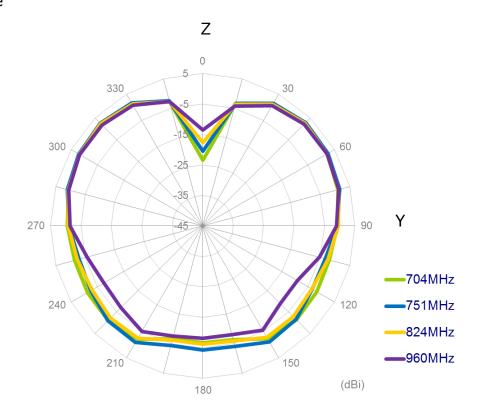







4.3. 3D Radiation Pattern


@704MHz

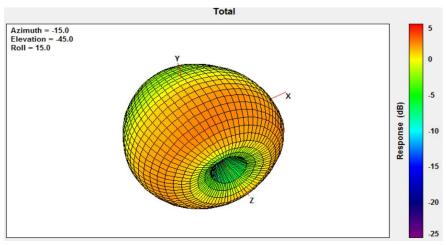

@751MHz

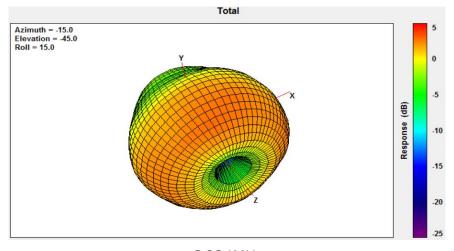

@824MHz

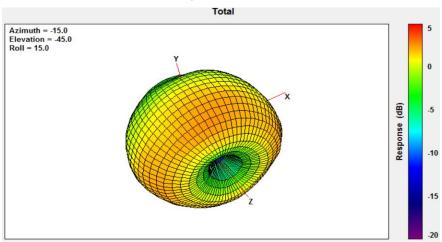


SPE-18-8-076/A/TH Page 10 of 15






@960MHz

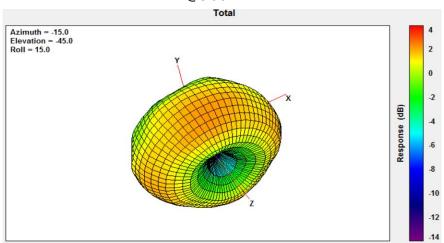





5. Mechanical Drawing

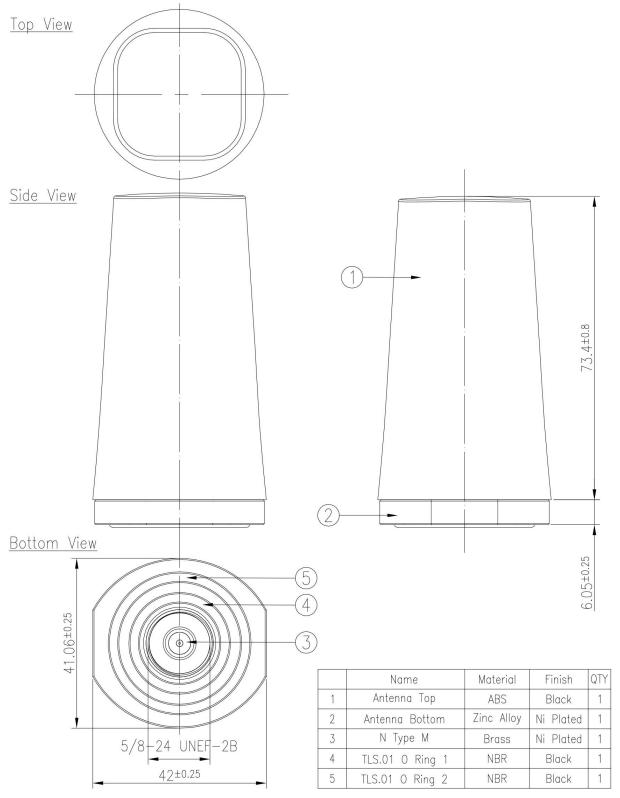


SPE-18-8-076/A/TH Page 12 of 15





6. Installation

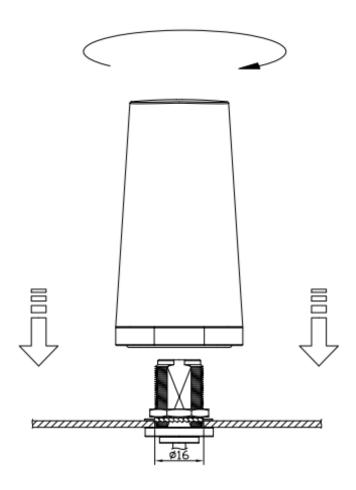


Recommended torque for mounting is 4.018 N.m or 41 kgf.cm Maximum torque for mounting is 9.8 N.m or 100 kgf.cm






7. Packaging


1 No. FNS.01.1F1 per small box Box Dimensions - 66 x 66 x 115mm Weight - 170g



1 Outer Carton Carton Dimensions - 430 x 380 x 280mm 60 pcs FNS.01.1F1 per carton Weight - 10.59Kg

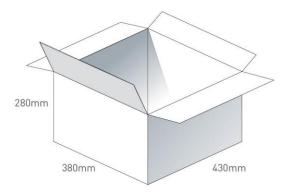

Pallet Dimensions 1100*1100*1550mm 30 Cartons per Pallet 10 Cartons per layer 3 Layers

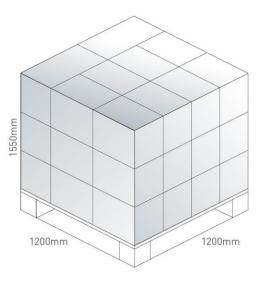

SPE-18-8-076/A/TH Page 14 of 15





Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

SPE-18-8-076/A/TH Page 15 of 15

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9