

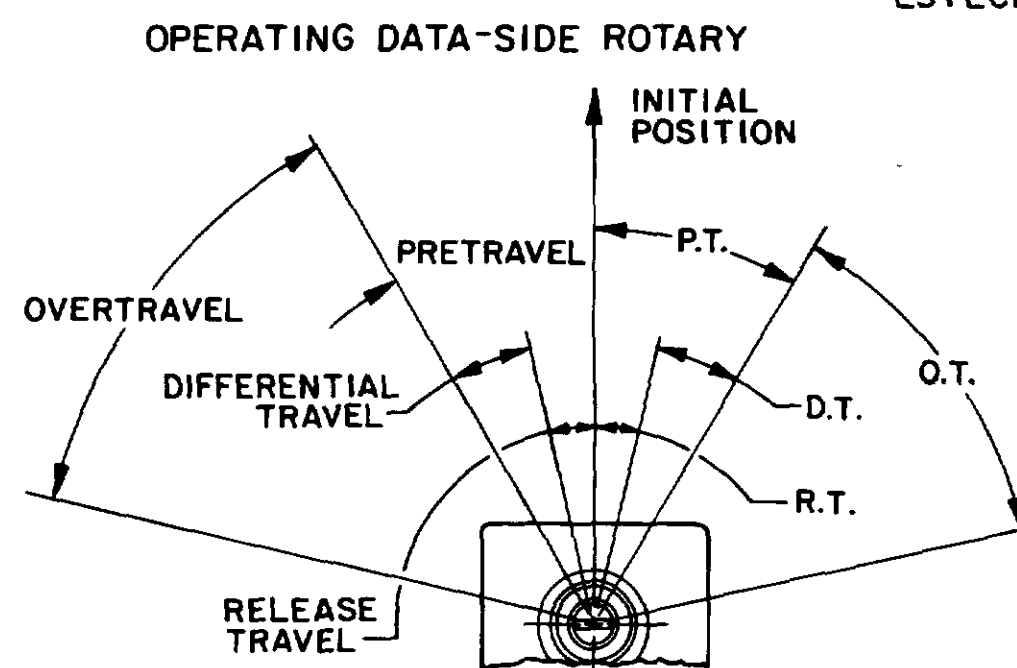
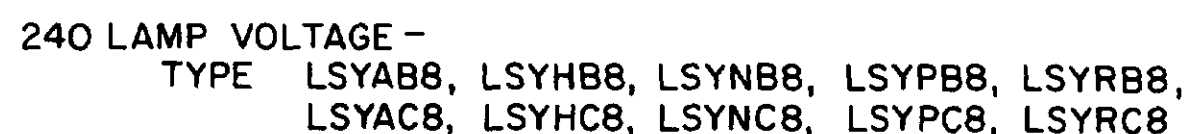


DOUBLE POLE

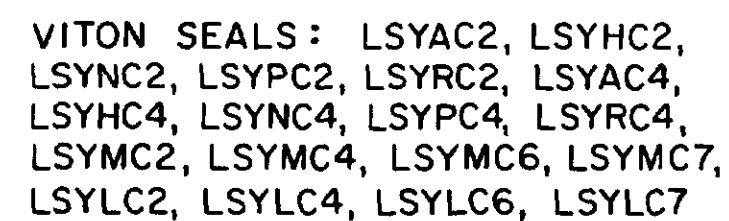

MANIFOLD MOUNT (PLUG-IN ONLY)  
SINGLE POLE AND DOUBLE POLE  
TYPE LSYA THROUGH LSYW SERIES


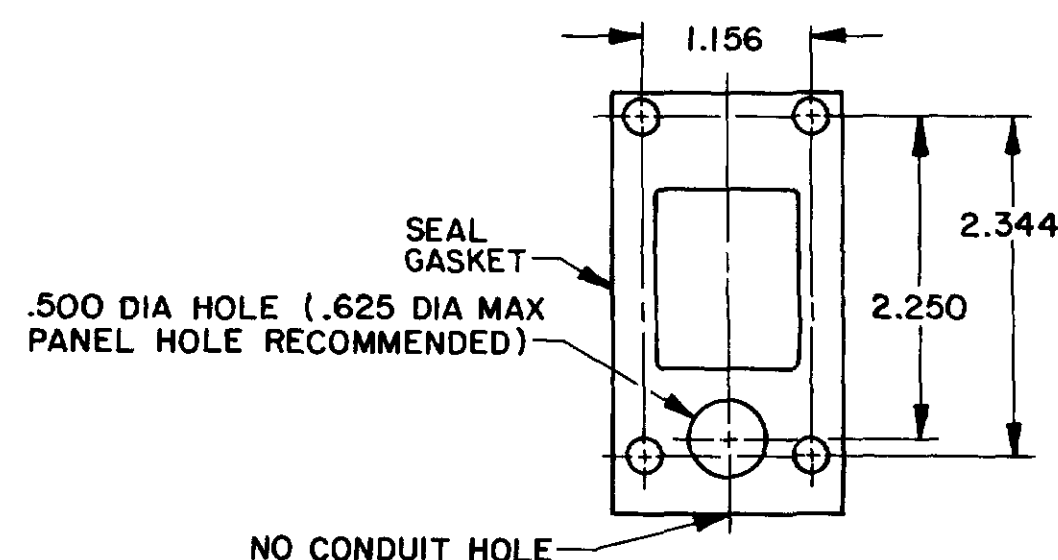


NOTE  
1 - ALL UNITS AVAILABLE WITH  
FLUOROSILICONE AND VITON SEALS



|                                                                                                                                                                                            |                                                                                                                   |                                 |                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|---------------------------------|-----------------------------------------------------------------------|
| <p>THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.</p> | <p><b>MICRO SWITCH</b></p> <p>FREEPORT ILLINOIS U.S.A.<br/>A DIVISION OF HONEYWELL</p> <p>TEL. 408. 608. 7100</p> | <p><b>SWITCH - ENCLOSED</b></p> | <p>CATALOG LISTING</p> <p><b>LSY SERIES</b></p> <p><b>CHART 1</b></p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|---------------------------------|-----------------------------------------------------------------------|

[illegible]



## SIDE ROTARY CAM TRACKING

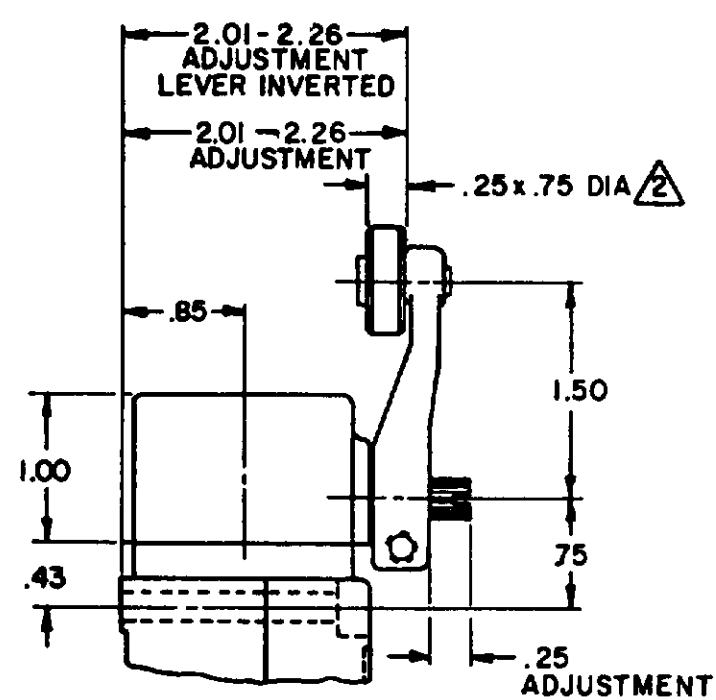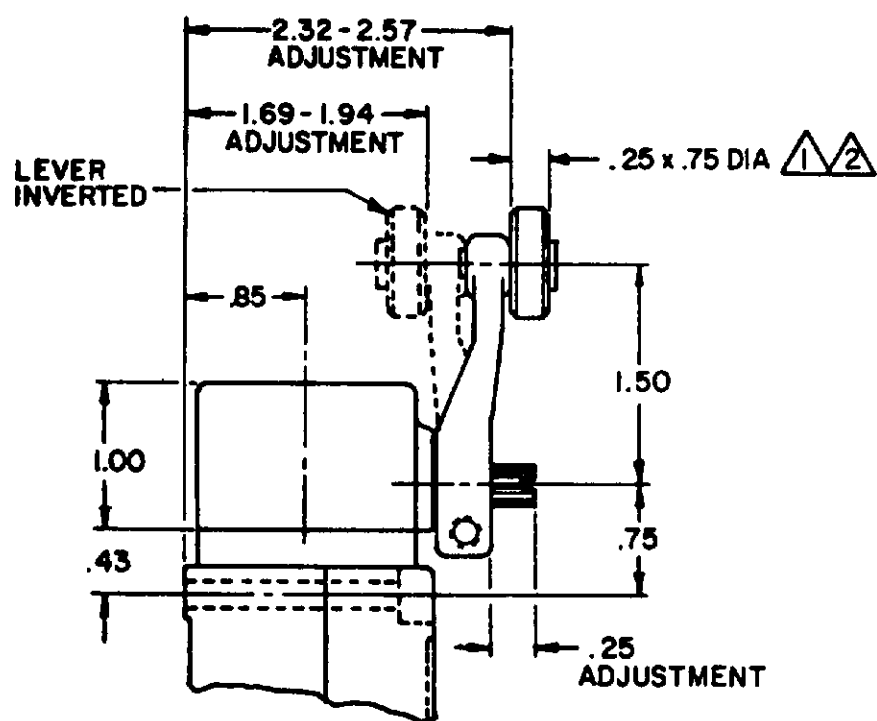

## LSZ51 TYPE LEVERS

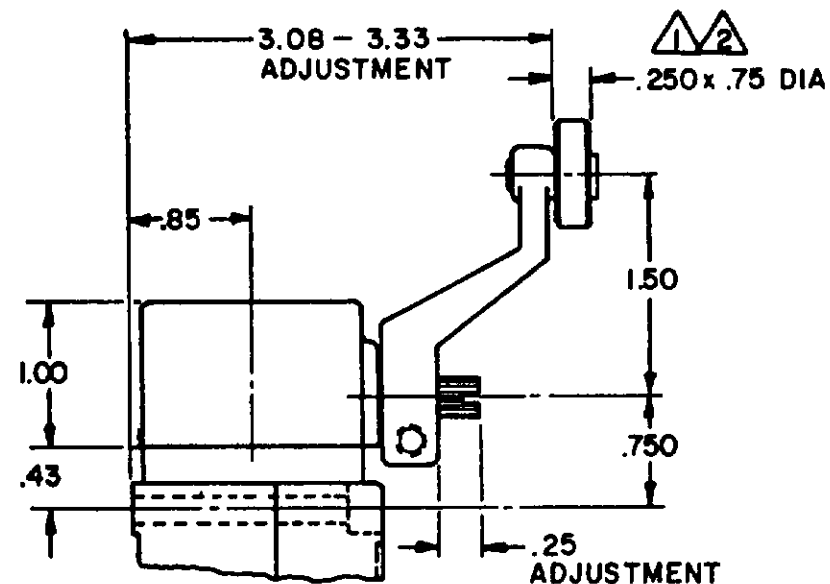
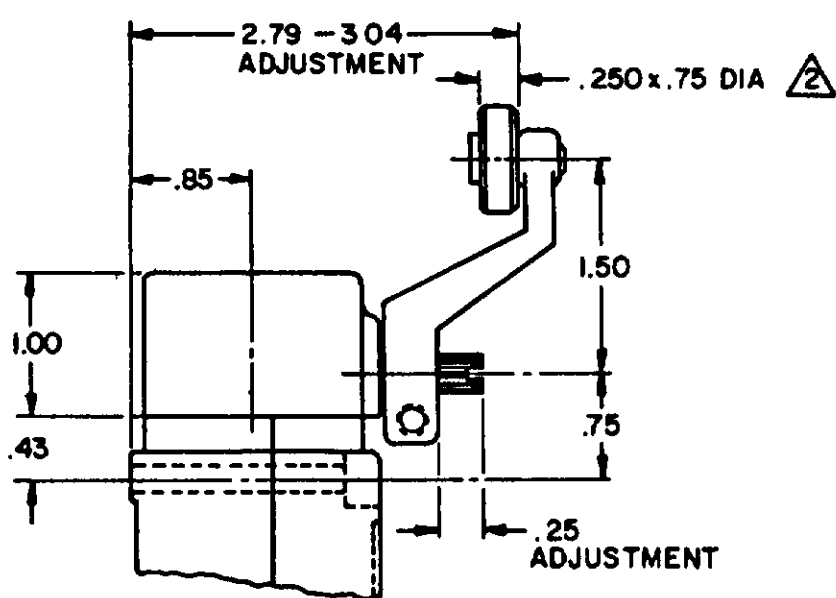


## LSZ55 TYPE LEVERS

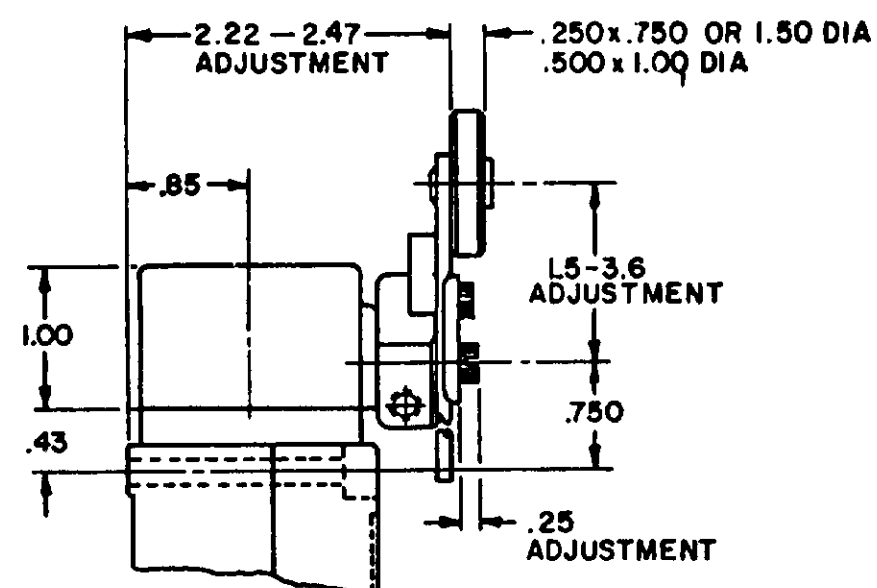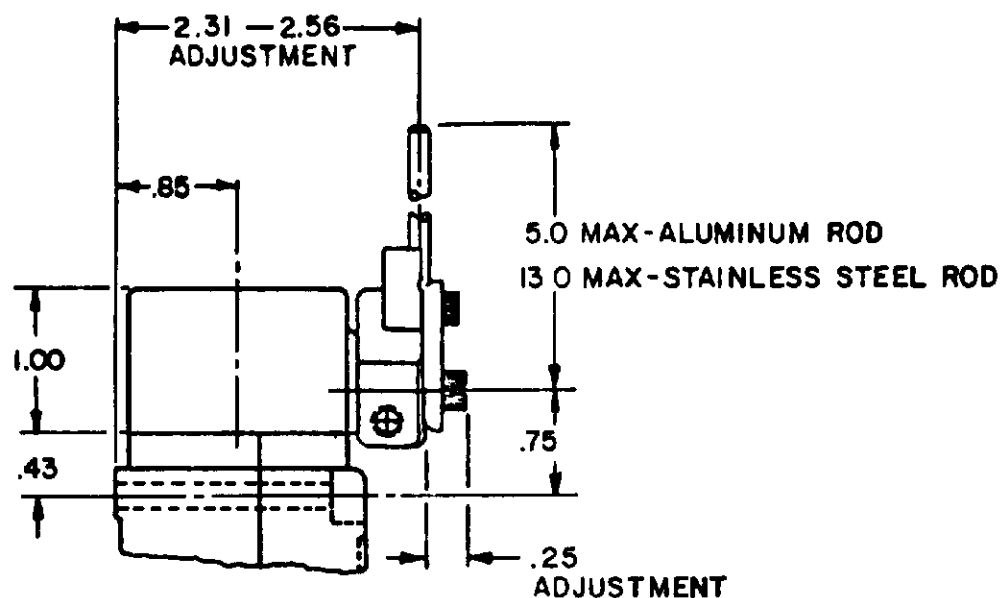

## LSZ54 TYPE LEVER

## LSZ52 TYPE LEVER

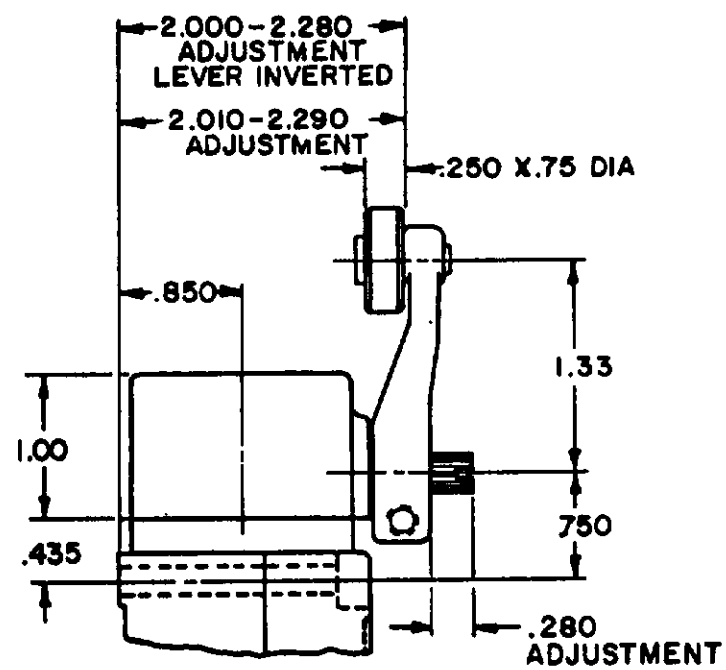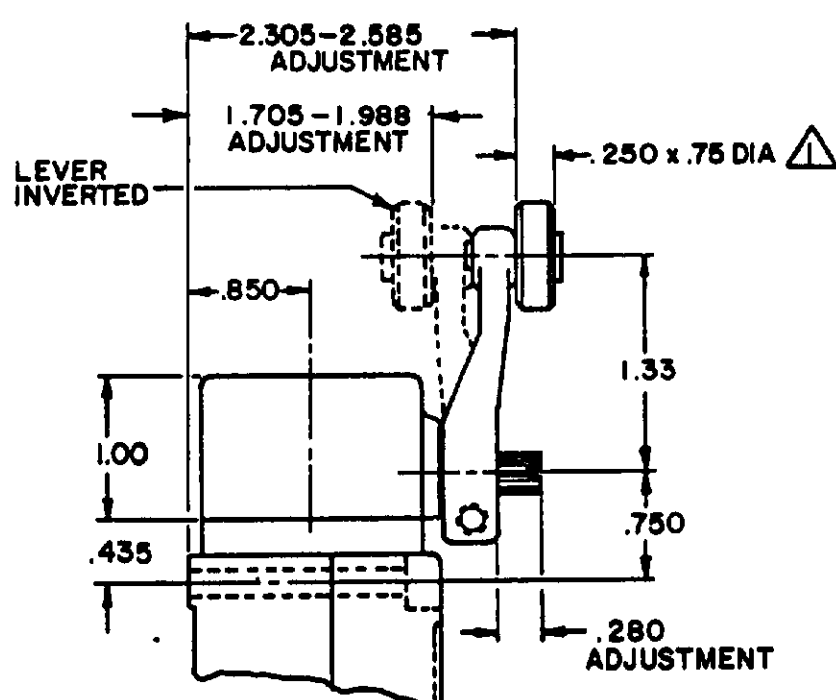

## LSZ59 TYPE LEVERS

### NOTES

- 1 - ALSO AVAILABLE IN .250 X 1.500 DIA NYLON, BUT LEVER CANNOT BE INVERTED
- 2 - FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO (M)
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 (M)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**MICRO SWITCH**  
a Honeywell Division

FEEDING CODE 31829

CHART 1

LSY SERIES

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ± .030


TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±


## TOP ROTARY

### SINGLE POLE

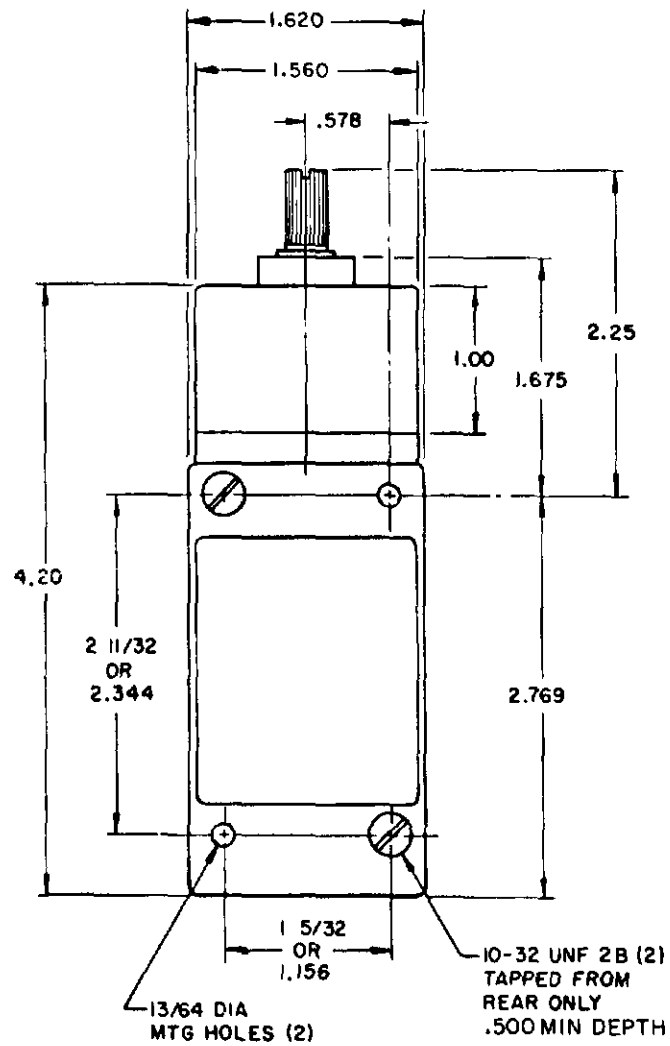


FLOUROSILICONE SEALS  
LSYBB1 & LSYBB3

VITON SEALS  
LSYBC1 & LSYBC3

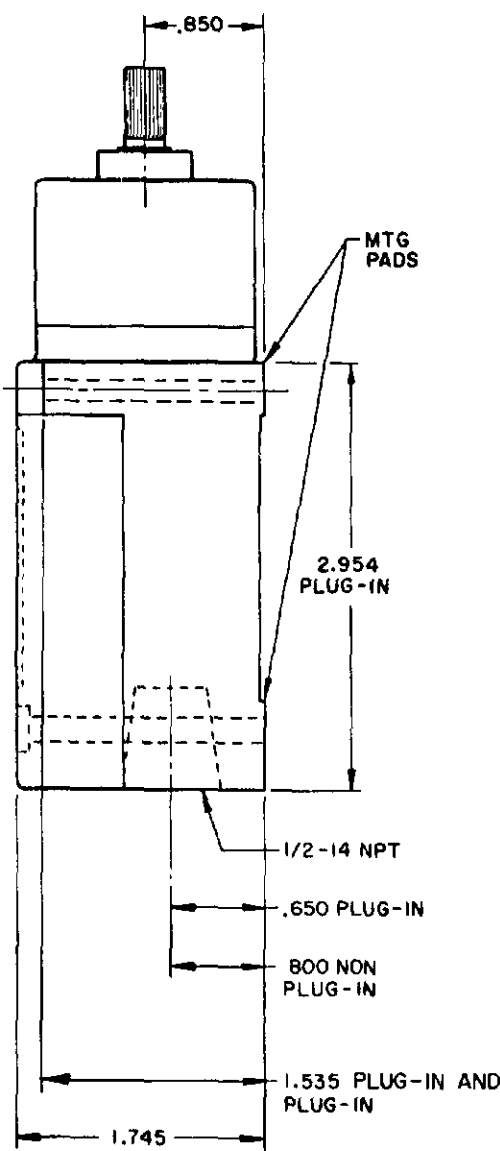

|                         |                    |                    |
|-------------------------|--------------------|--------------------|
| PRETRAVEL MAX           | SINGLE POLE<br>25° | DOUBLE POLE<br>25° |
| OVERTRAVEL MIN          | 110°               | 110°               |
| DIFFERENTIAL TRAVEL MAX | 10°                | 12°                |
| OPERATING TORQUE MAX    | 2.5 IN. LBS        | 2.5 IN. LBS        |
| TOTAL TRAVEL (REF)      | 135°               | 135°               |

### DOUBLE POLE

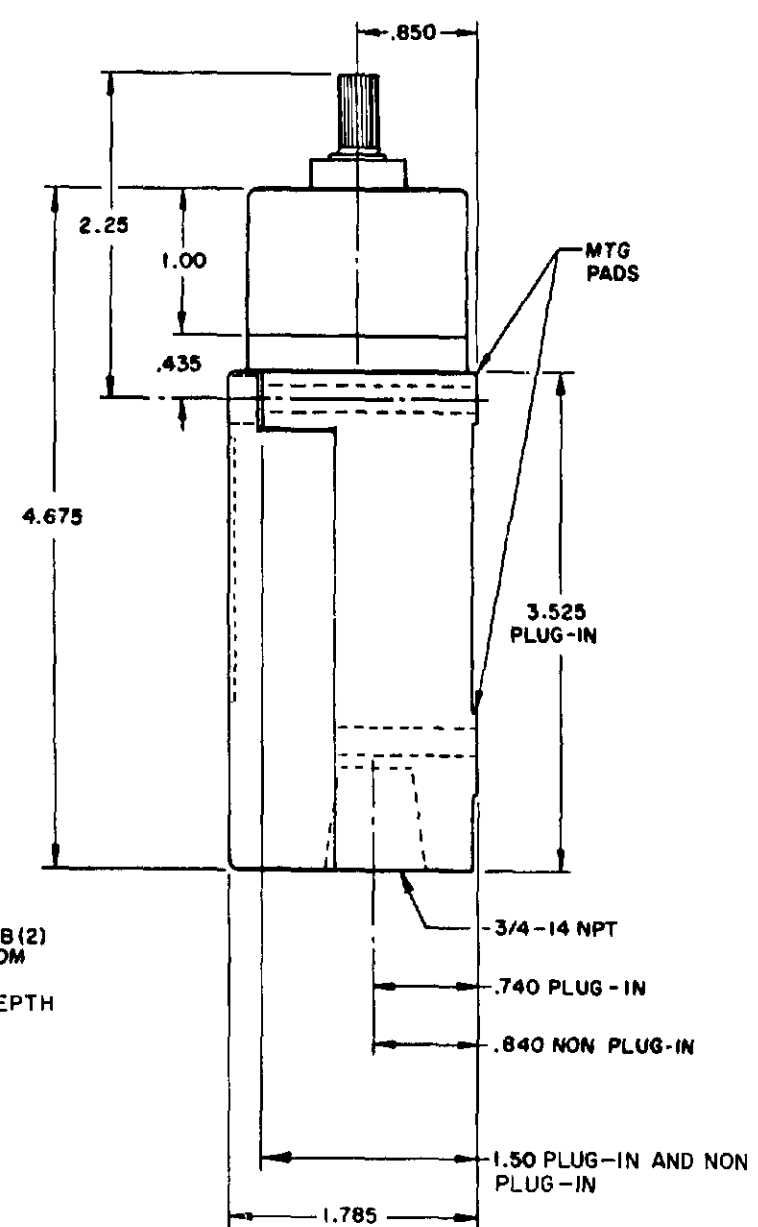

FLOUROSILICONE SEALS  
LSYBB2 & LSYBB4  
LSYBB6 & LSYBB7 HAVE 1/2-14NPT  
CONDUIT HOLE

VITON SEALS  
LSYBC2 & LSYBC4, LSYBC6 & LSYBC7  
HAVE 1/2-14NPT CONDUIT HOLE

### ELECTRICAL RATINGS

10 AMP CONT.

| A.C. VOLTAGE | AMPS AT .35 POWER FACTOR |       |             |       |
|--------------|--------------------------|-------|-------------|-------|
|              | SINGL. POL.              |       | DOUBLE POL. |       |
|              | MAKE                     | BREAK | MAKE        | BREAK |
| 120          | 60                       | 6     | 10          | 3     |
| 240          | 30                       | 3     | 15          | 1.5   |
| 480          | 15                       | 1.5   | 7.5         | .75   |
| 600          | 12                       | 1.2   | 6           | .6    |

| D.C. VOLTAGE | MAKE & BREAK<br>INDUCTIVE | RESISTIVE |
|--------------|---------------------------|-----------|
| 120          | 0.25                      | 0.80      |
| 240          | 0.15                      | 0.40      |


ELECTRONIC DUTY BASIC SWITCH  
10 AMP CONT.

| VOLTAGE        |             |
|----------------|-------------|
| 5 AC OR DC MIN | .01 AMP MIN |
| 600 AC         | 720 VA      |
| 240 DC         | 30 WATT     |


### WIRING BASIC SWITCH (SAME POLARITY MUST BE OBSERVED FOR EACH POLE)

#### SINGLE POLE

##### MOMENTARY

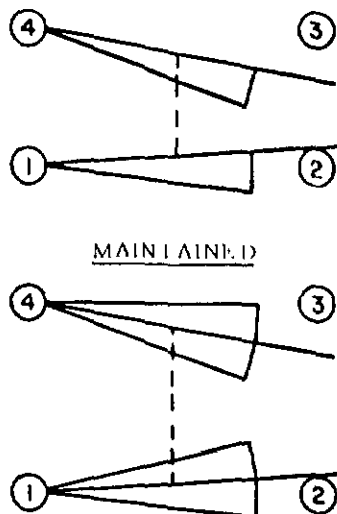


##### MAINTAINED



#### SINGLE POLE


##### ELECTRONIC DUTY

##### MOMENTARY

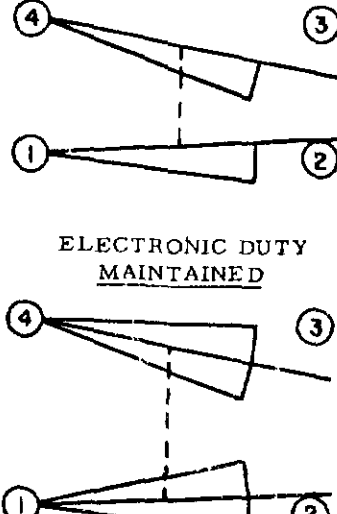

##### ELECTRONIC DUTY

##### MAINTAINED




#### DIRECT ACTING




#### DOUBLE POLE

##### MOMENTARY

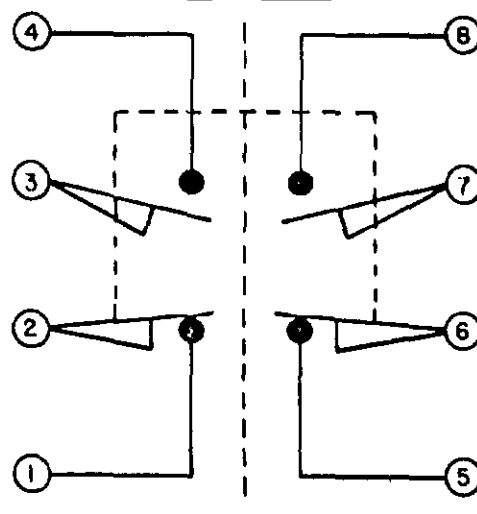

##### MAINTAINED

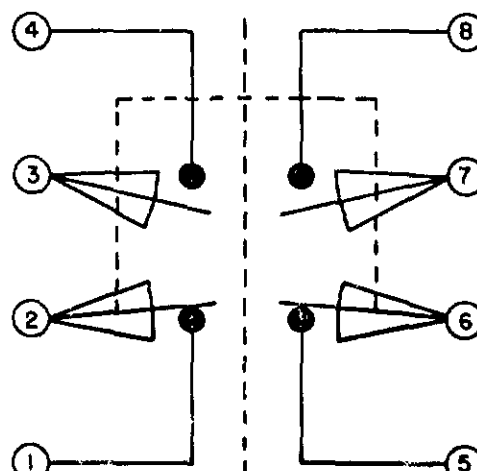

DIRECT ACTING (ALSO RATED AT A.C. 10  
AMP CONT.)

| D.C. VOLTAGE | MAKE AND BREAK AMPS |           |
|--------------|---------------------|-----------|
|              | INDUCTIVE           | RESISTIVE |
| 30           | 4.2                 | 4.2       |
| 120          | 1.1                 | 1.1       |
| 240          | .55                 | .55       |

NOTES:

1 - ALL UNITS AVAILABLE WITH  
FLOUROSILICONE AND VITON SEALS

2 DIFFERENTIAL TRAVEL ON ALL  
OPERATING CHARACTERISTICS NOT  
APPLICABLE

SCALE NONE  
DO NOT SCALE PRINT


MICRO SWITCH  
FREEPORT, L.I., N.Y. U.S.A.  
A DIVISION OF HONEYWELL  
FID. MFG. CODE 91918

SWITCH - ENCLOSED



LSY SERIES  
CHART 1

# PLUNGER TYPE TOP


## SINGLE POLE

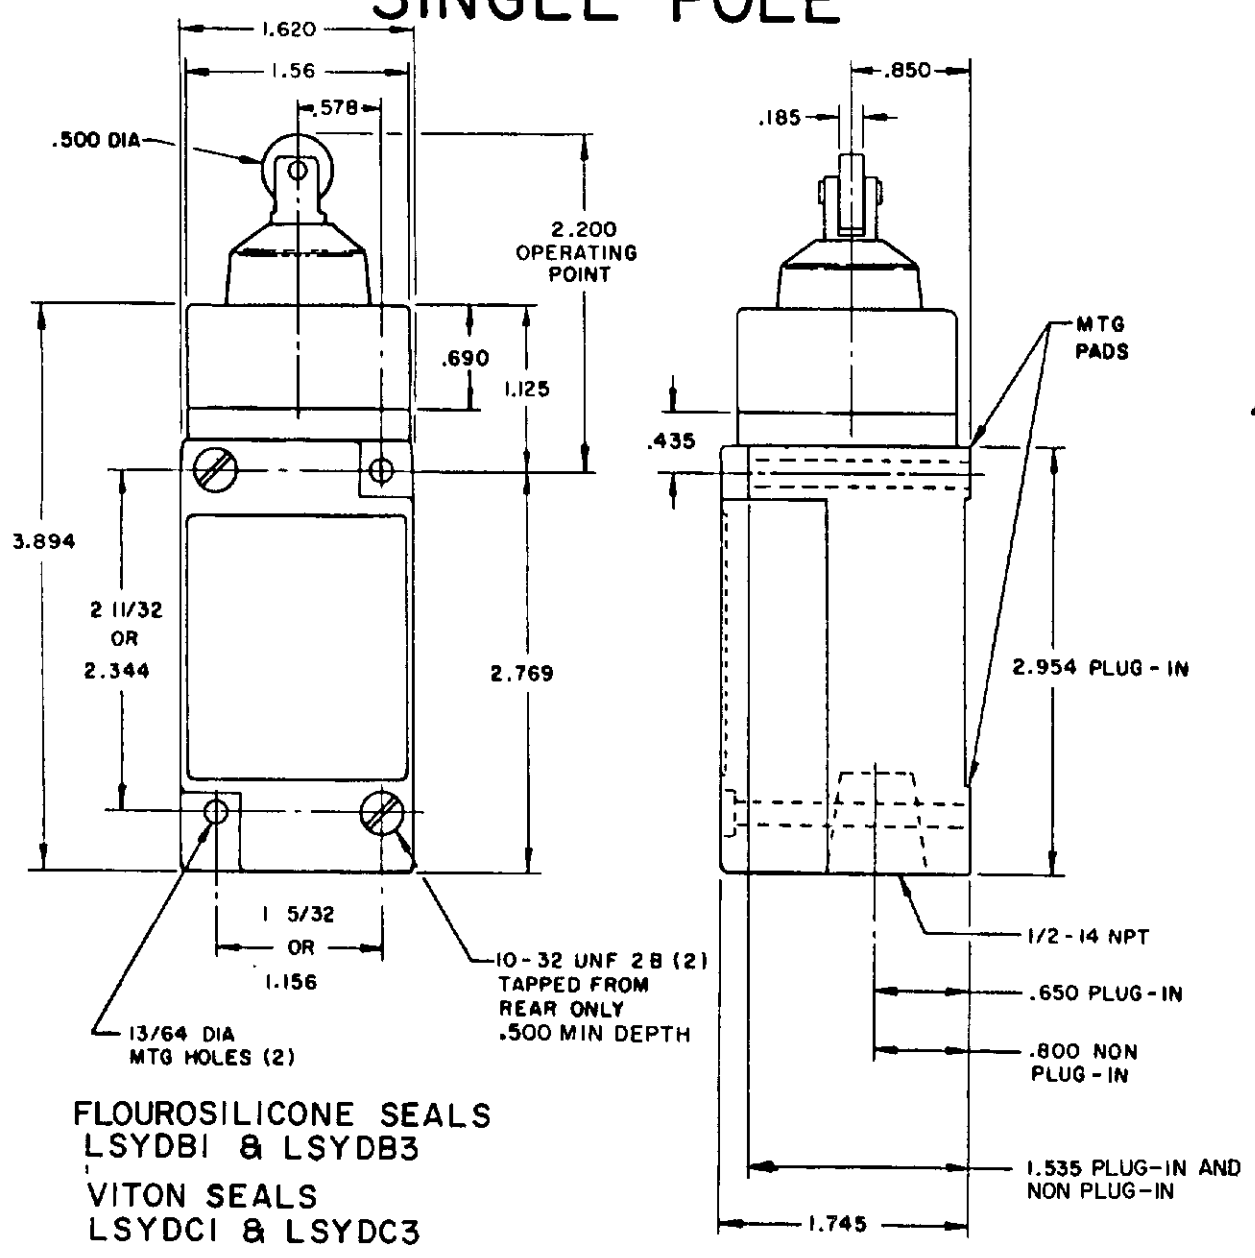


## DOUBLE POLE

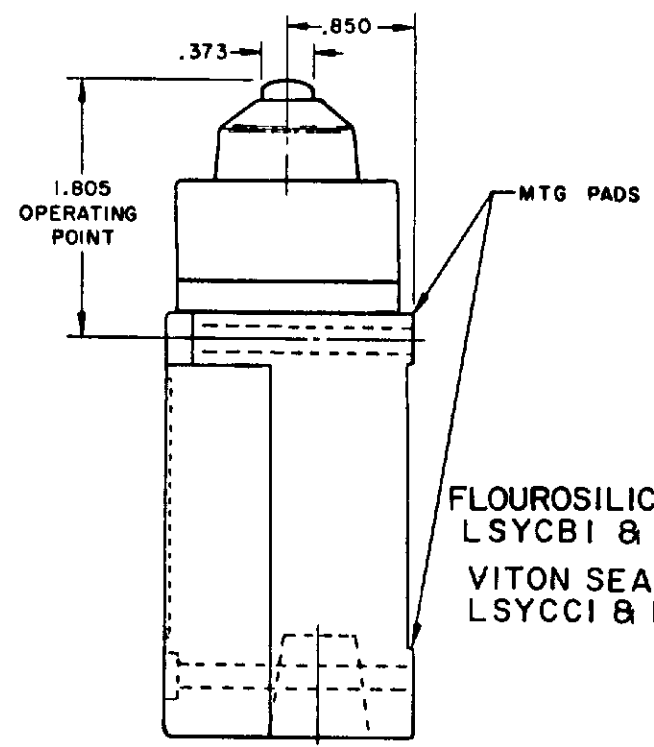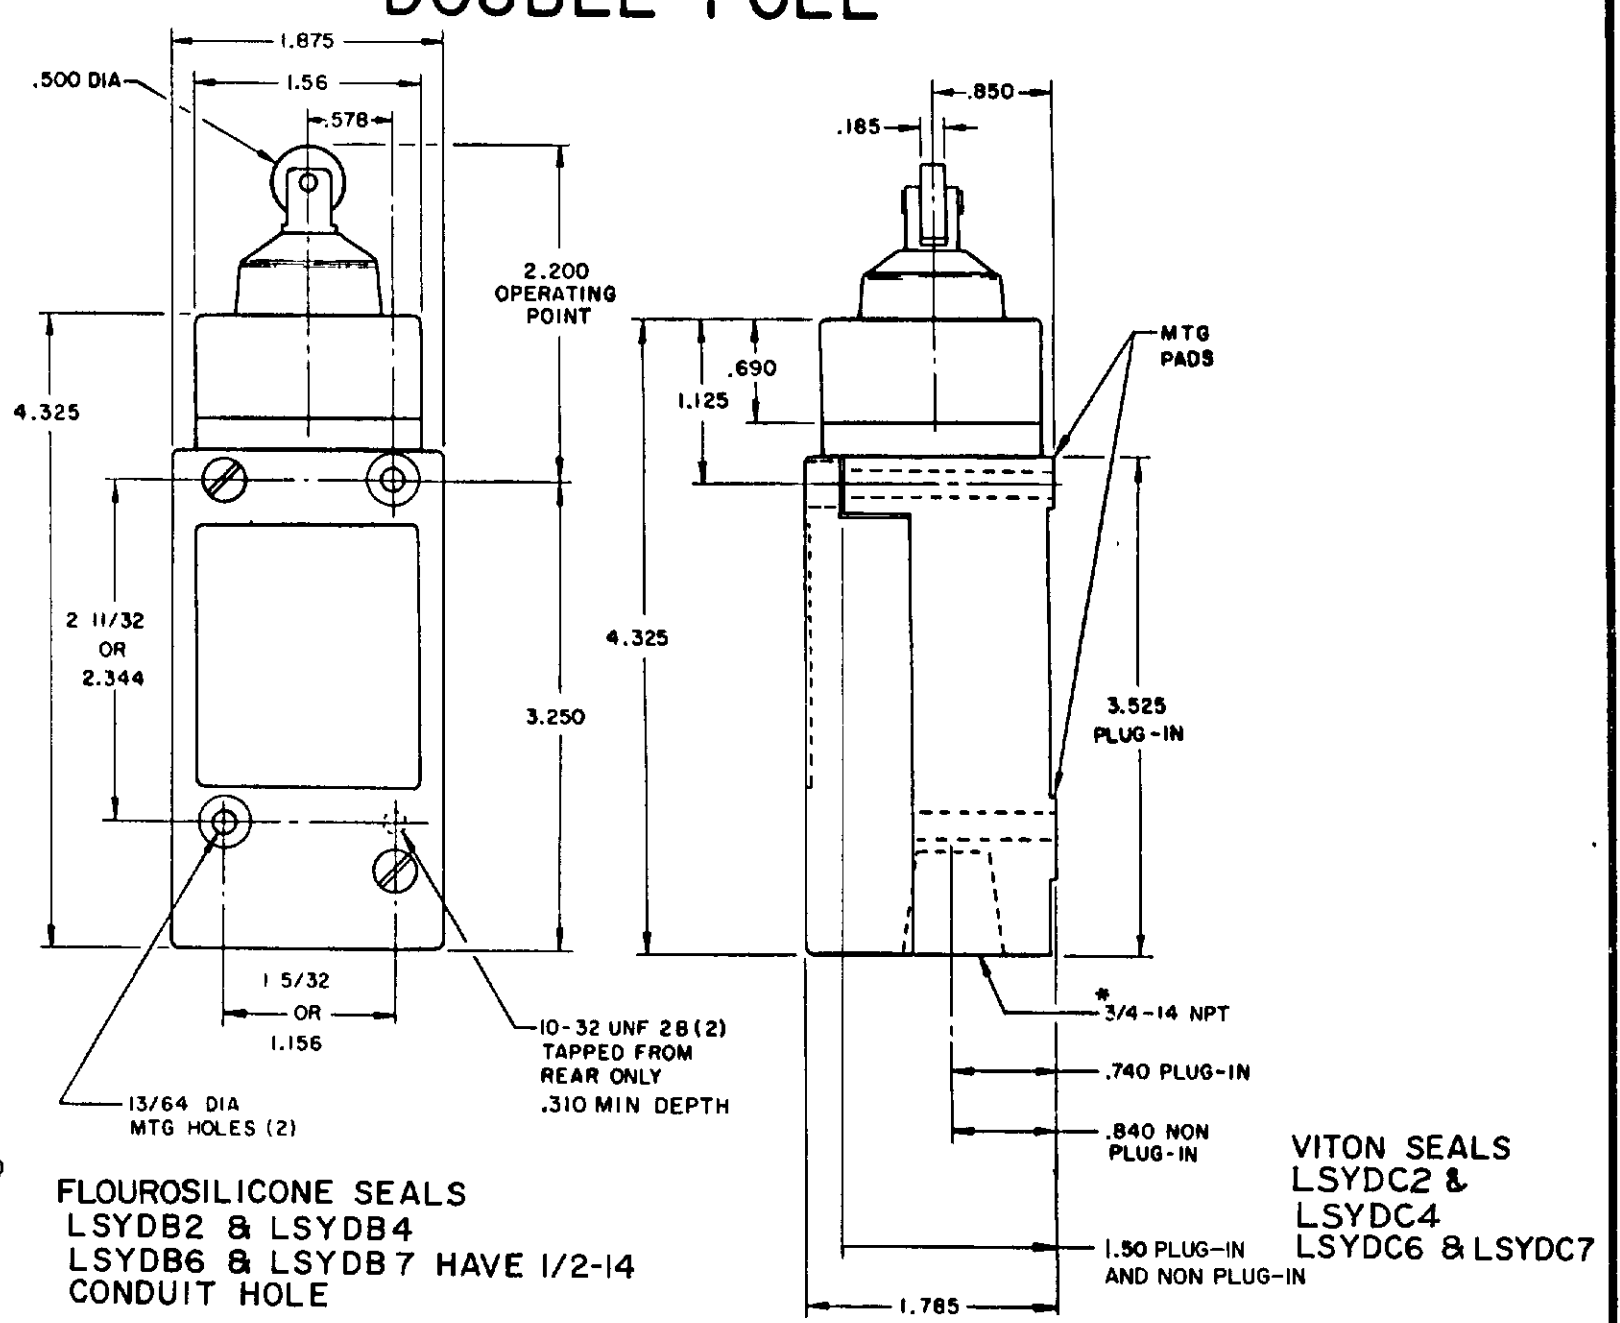



SINGLE POLE PLUG-IN ONLY  
WITH INDICATOR LAMP

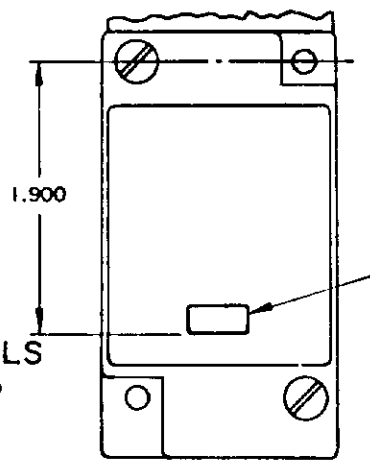


120 LAMP VOLTAGE -  
LSYCB 5, LSYDB5, LSYVB5  
LSYCC5, LSYDC5, LSYVC5  
240 LAMP VOLTAGE -  
LSYCB8, LSYDB8, LSYVB8  
LSYCC8, LSYDC8, LSYVC8

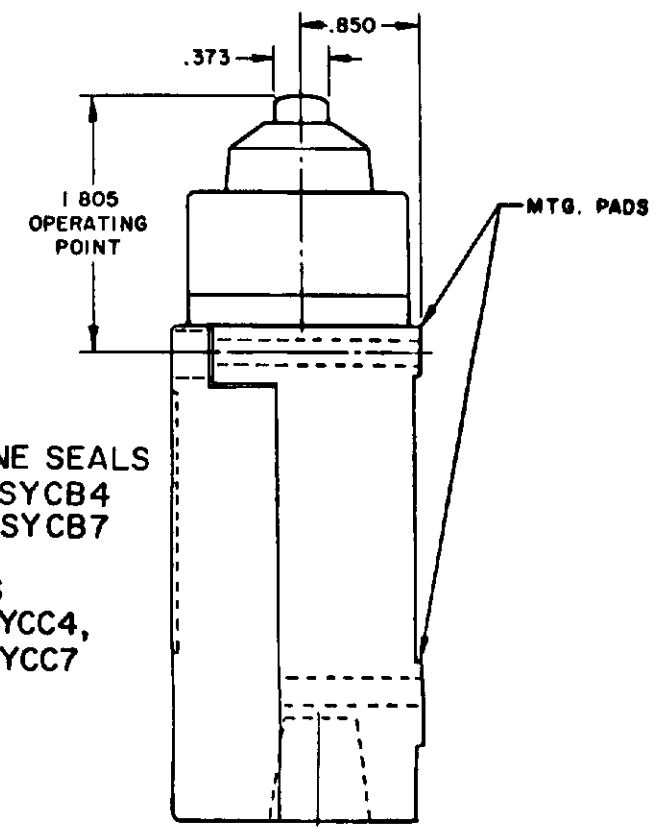

MANIFOLD MOUNT (PLUG-IN ONLY)  
SINGLE POLE AND DOUBLE POLE  
TYPE LSYA THROUGH LSYW SERIES

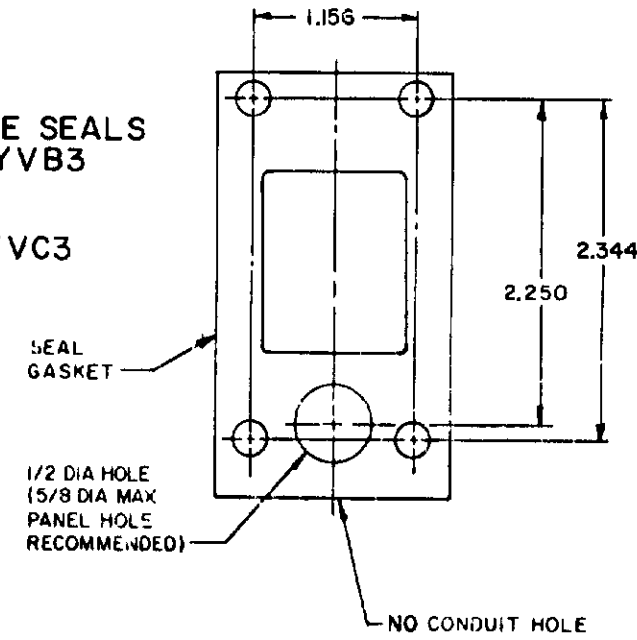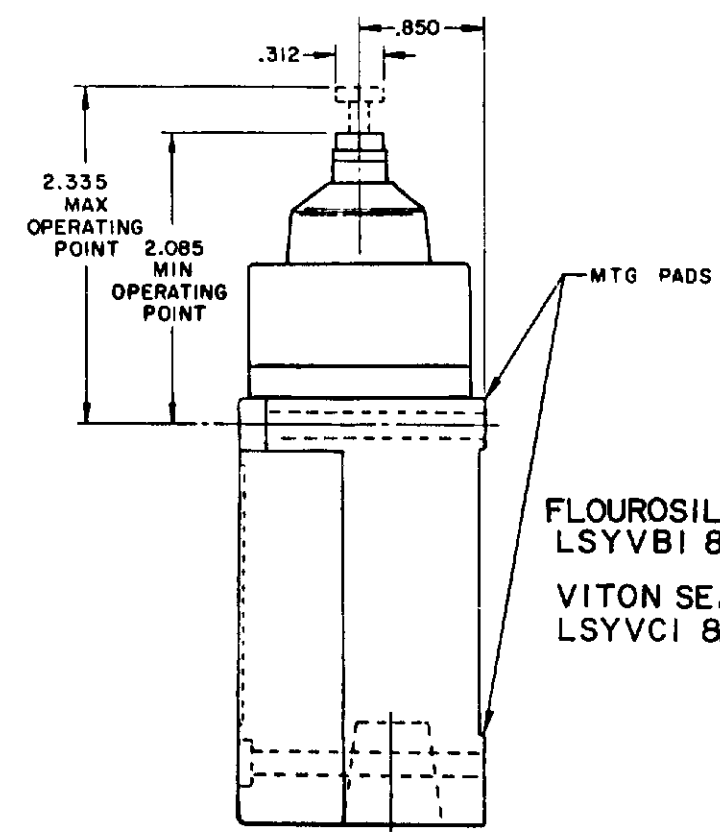

FLOUROSILICONE SEALS  
LSYVB2 & LSYVB4,  
LSYVB6 & LSYVB7  
VITON SEALS  
LSYVC2 & LSYVC4,  
LSYVC6 & LSYVC7

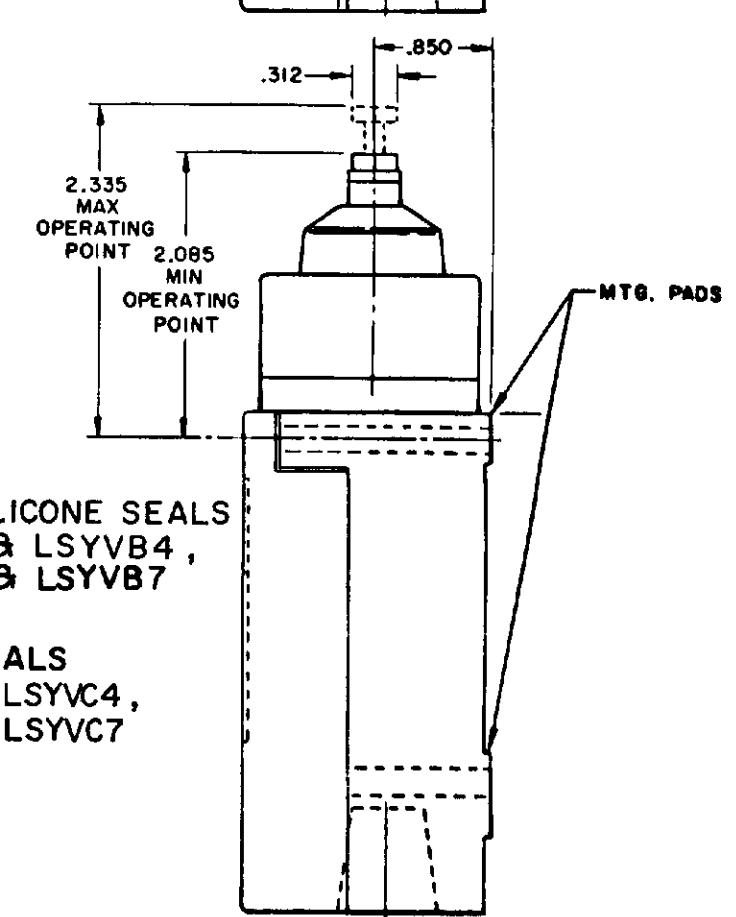

NOTES:  
1 - ALL UNITS AVAILABLE WITH  
FLUOROSILICONE AND VITON SEALS

**MICRO SWITCH**  
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF  
MONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.  
A DIVISION OF MONEYWELL  
FID. REG. CO. 1988






**SWITCH - ENCLOSED**

**LSY SERIES**  
CATALOG LISTING  
CHART 1

## SIDE PLUNGER TYPE


### SINGLE POLE

### DOUBLE POLE

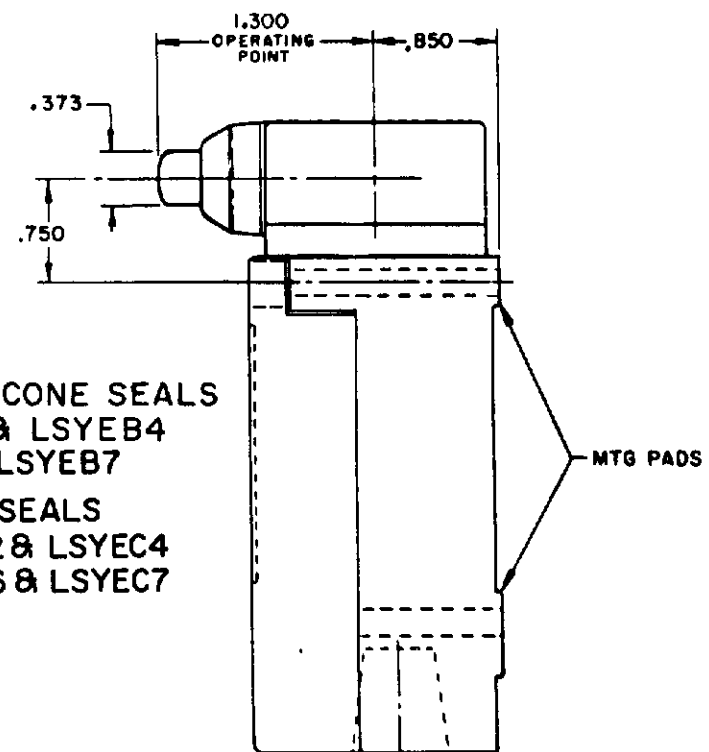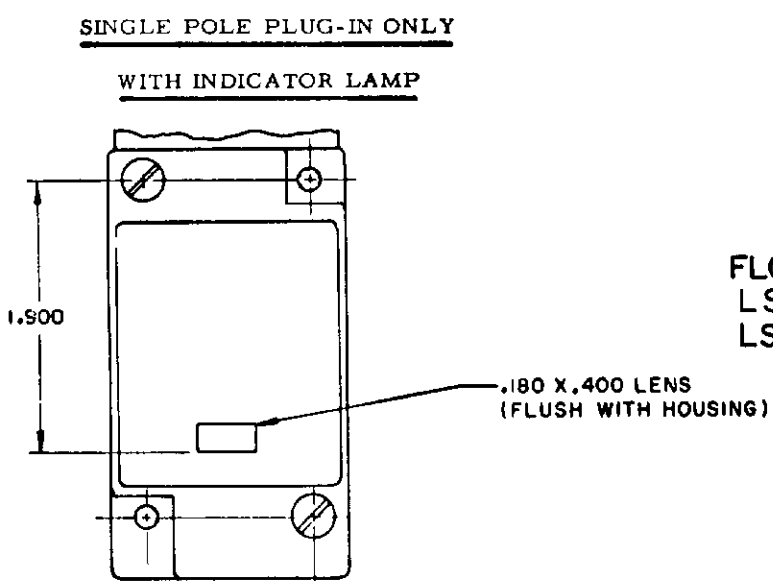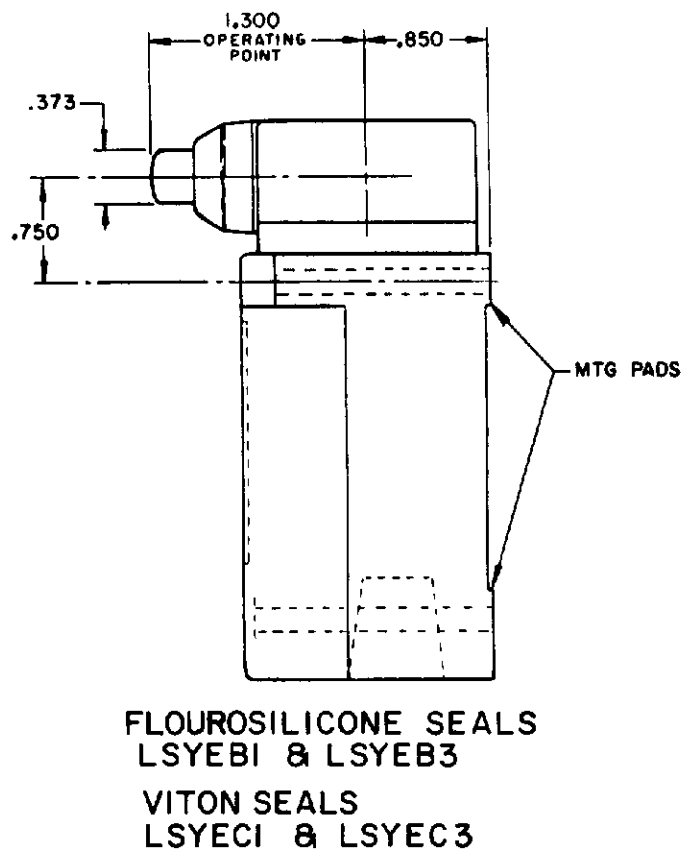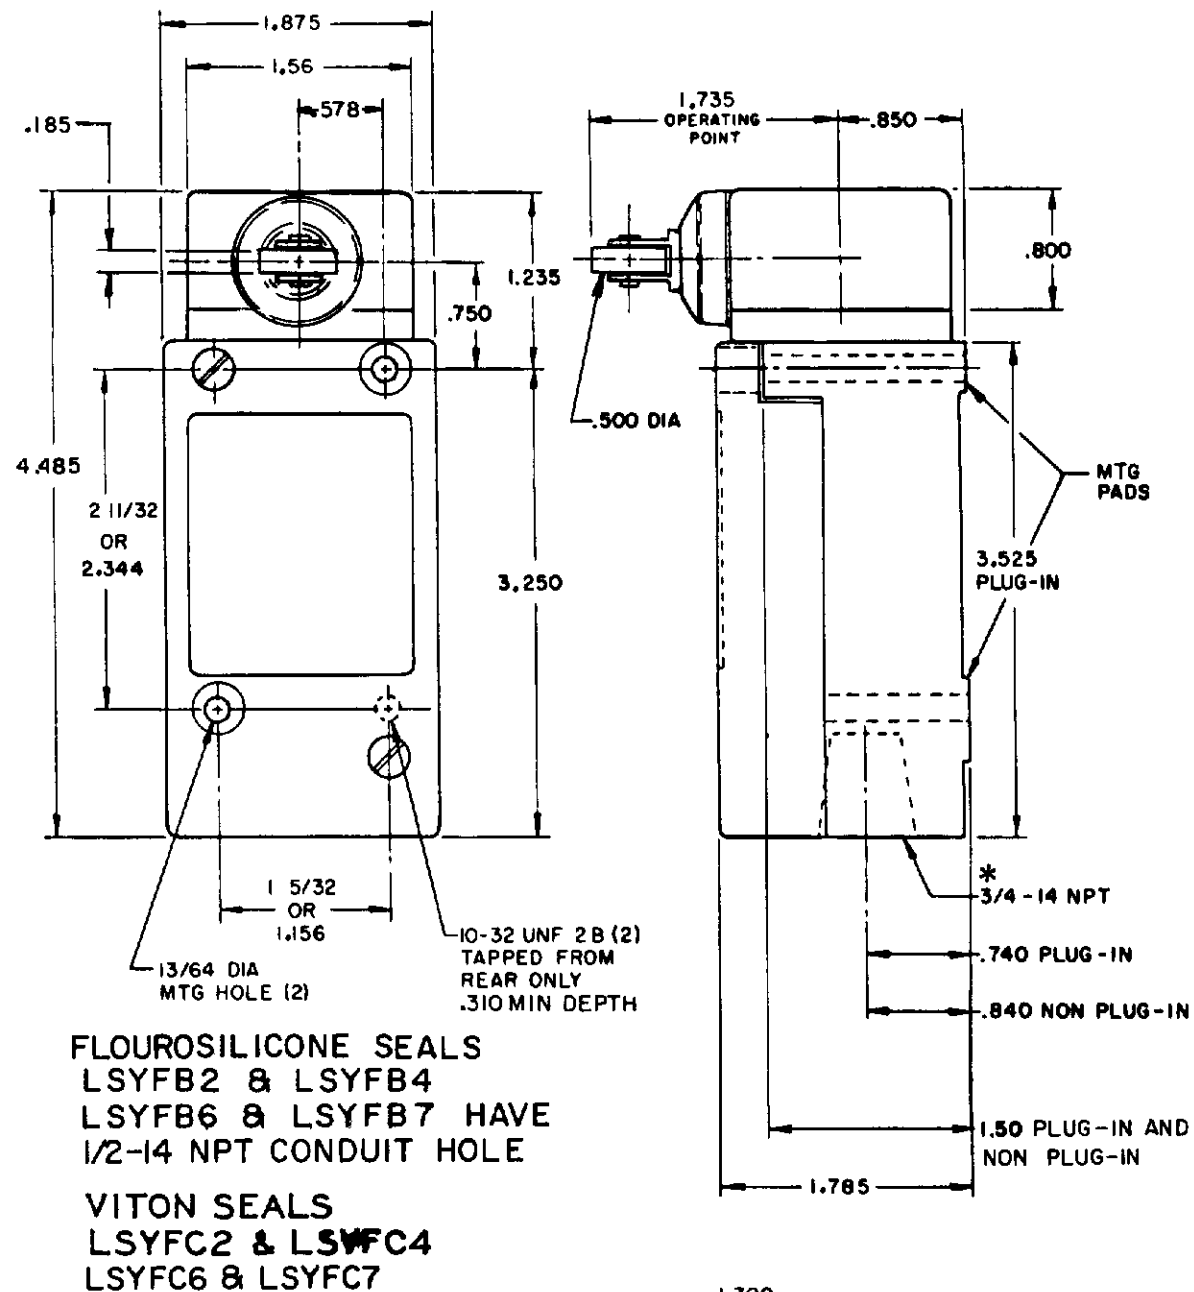
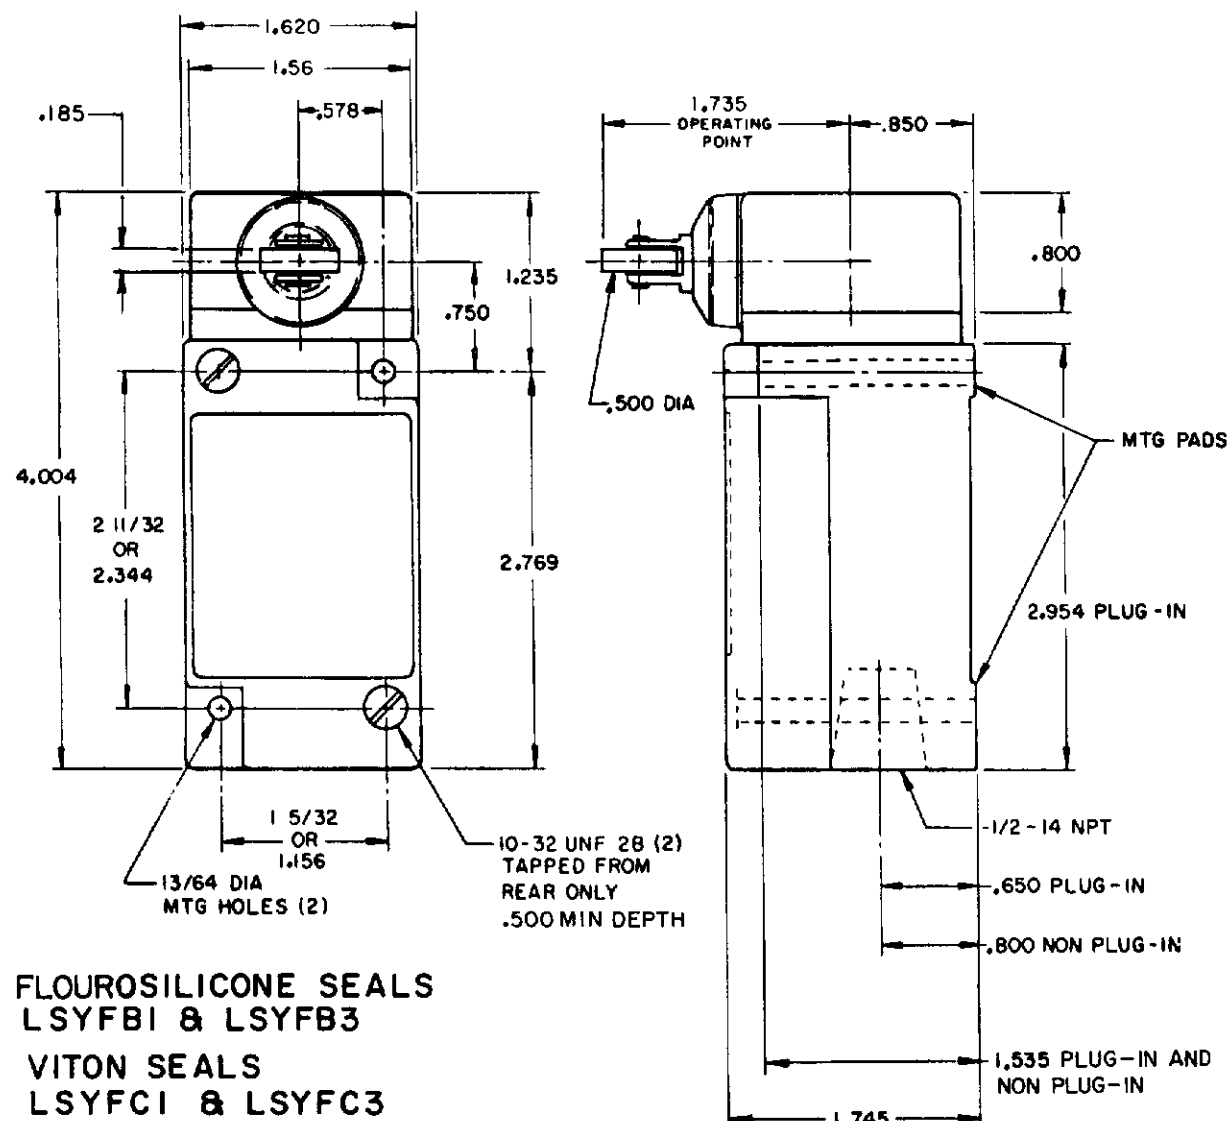


120 LAMP VOLTAGE -  
LSYFB5, LSYEB5, LSYWB5  
LSYFC5, LSYEC5, LSYWC5

240 LAMP VOLTAGE -  
LSYFB8, LSYEB8, LSYWB8  
LSYFC8, LSYEC8, LSYWC8

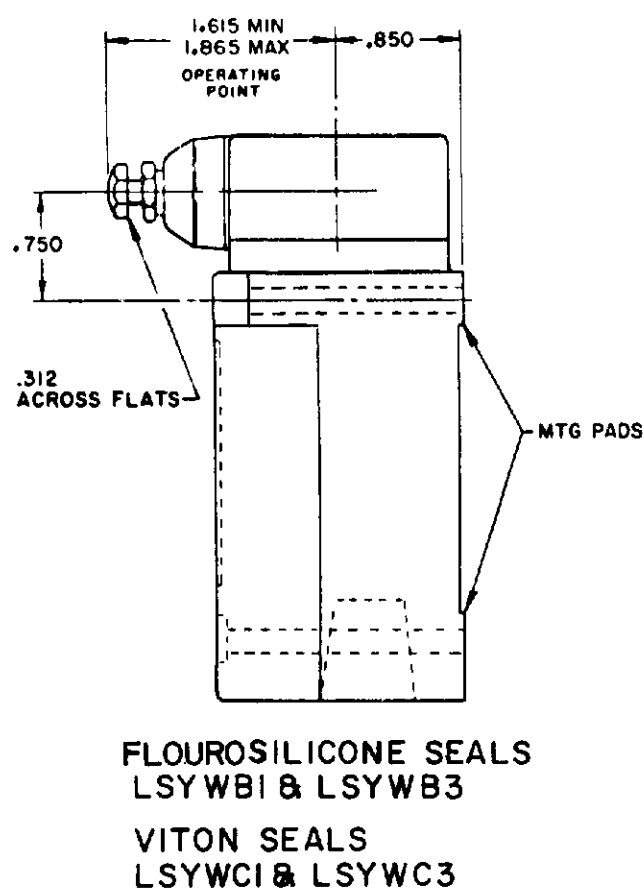

MANIFOLD MOUNT (PLUG-IN ONLY)  
SINGLE POLE AND DOUBLE POLE  
TYPE LSYA THROUGH LSYW SERIES

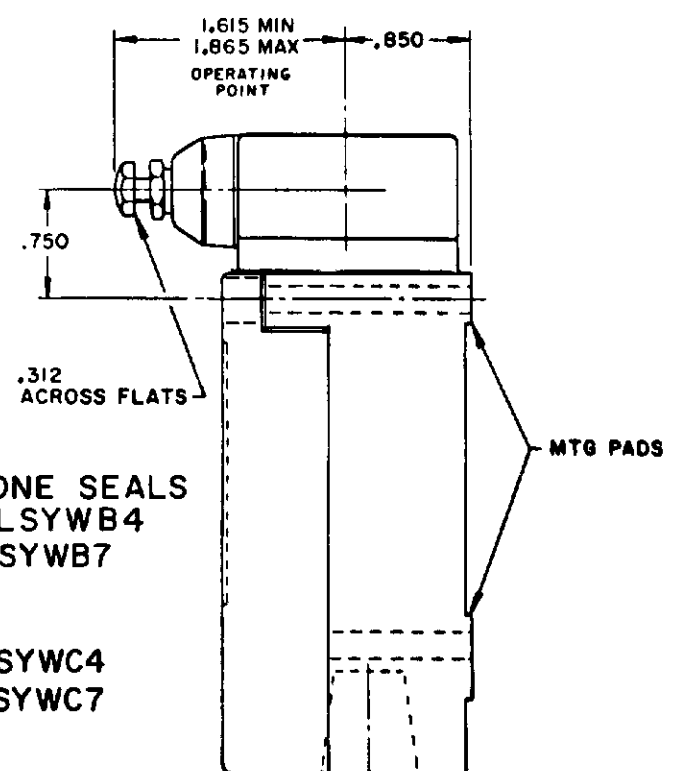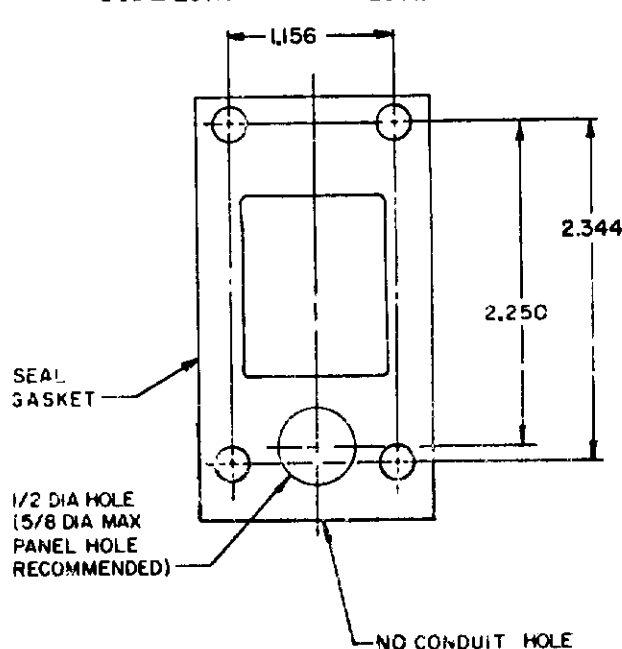


NOTES:  
1 - ALL UNITS AVAILABLE WITH  
FLOUROSILICONE AND VITON SEALS

**MICRO SWITCH**  
FREEPORT ILLINOIS U.S.A.  
A DIVISION OF HONEYWELL

**SWITCH - ENCLOSED**

**LSY SERIES**  
CATALOG LISTING  
CHART 1

SCALE NONE  
DO NOT SCALE PRINT

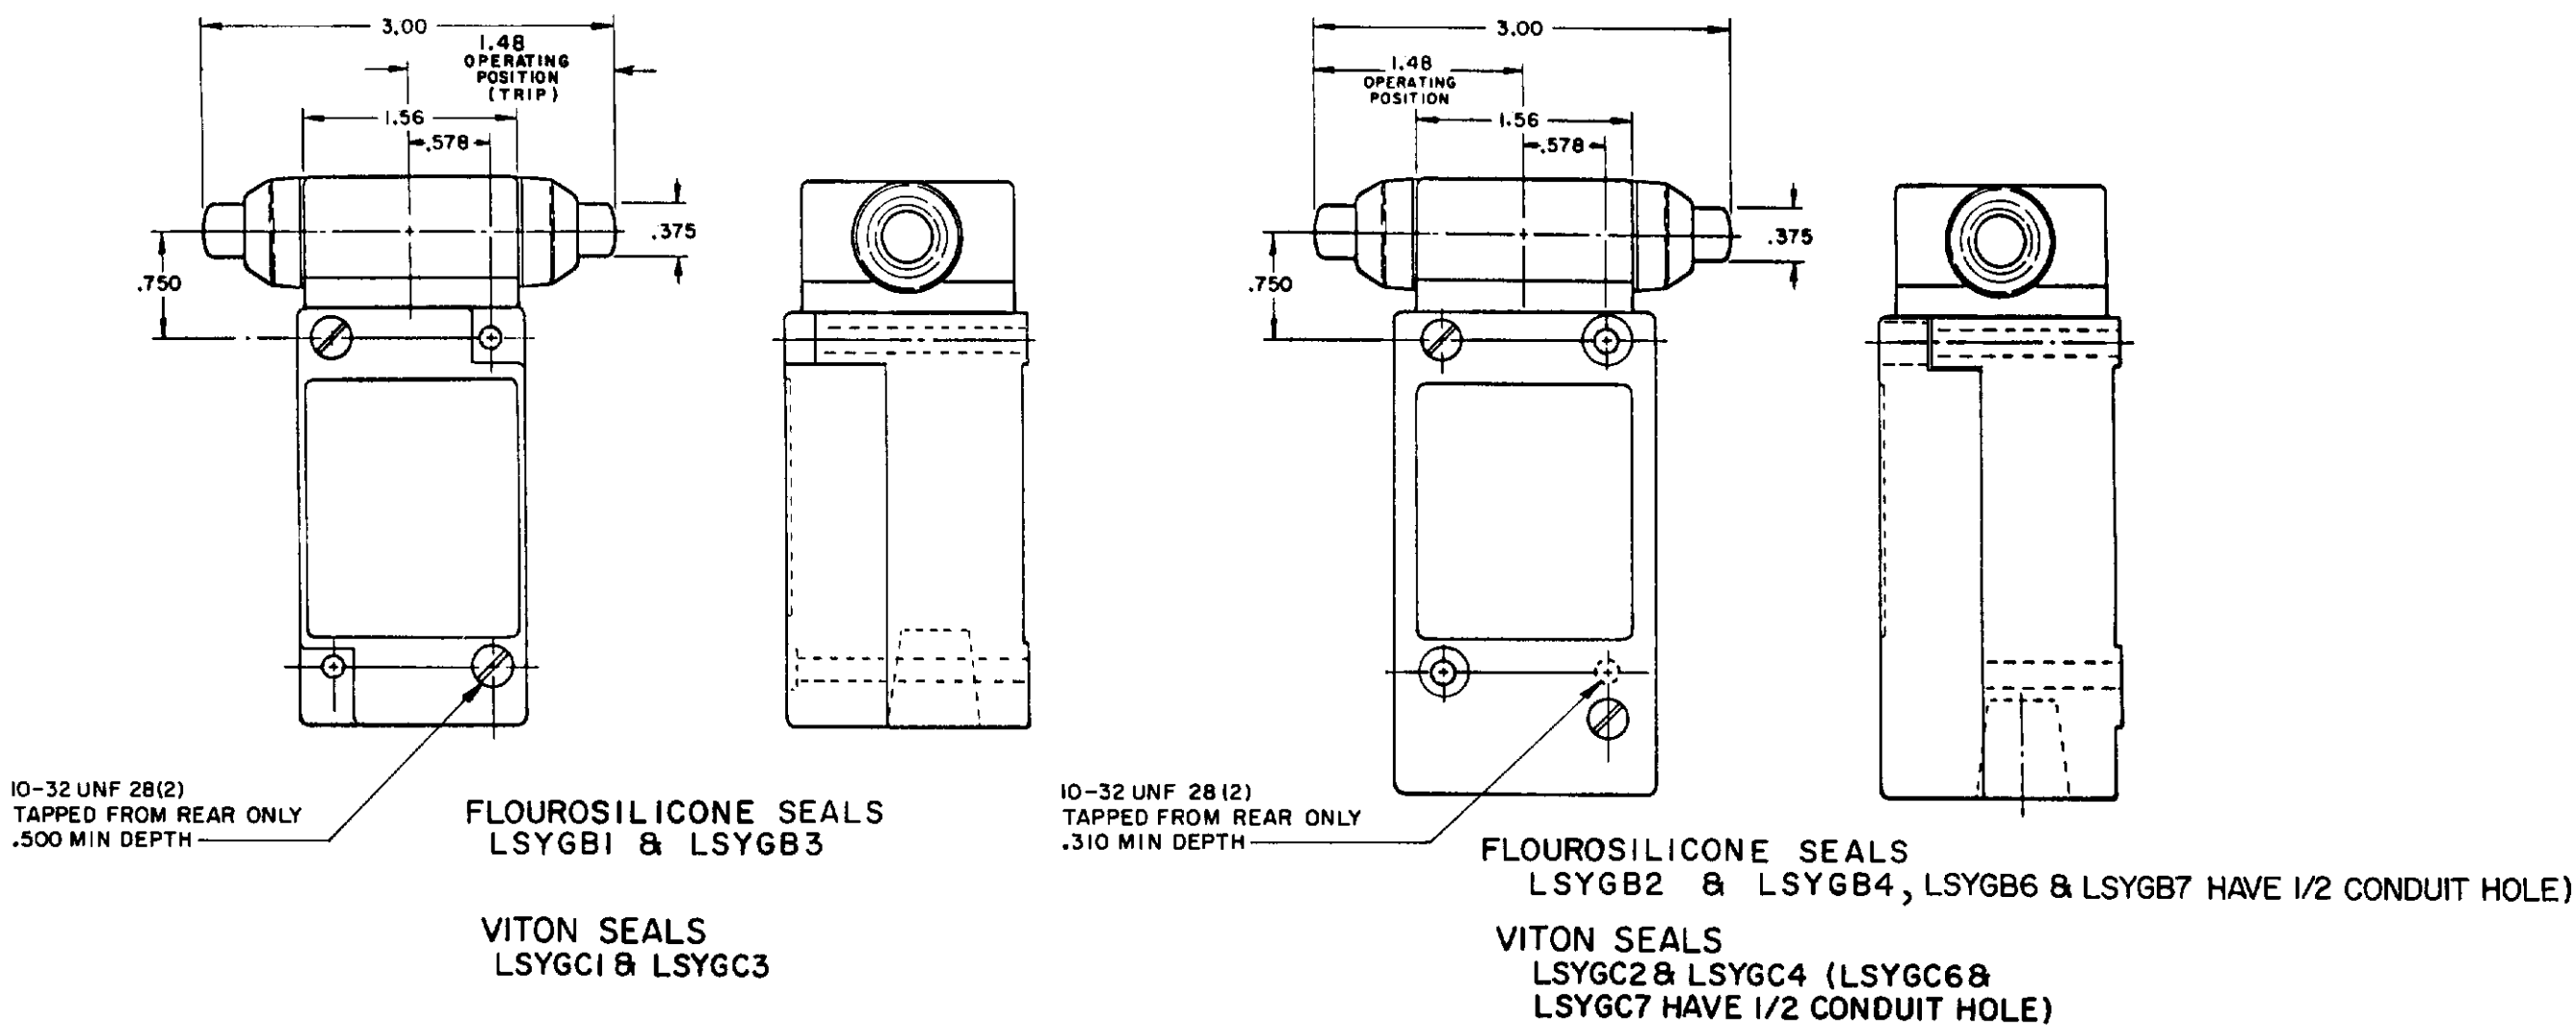


INITIAL POSITION (FREE POSITION) }  
OPERATING POINT } PRETRAVEL  
FULL TRAVEL } DIFFERENTIAL TRAVEL  
OVERTRAVEL

| OPERATING POINT GIVEN IN<br>RELATION TO TOP MOUNTING HOLE |                     |                     |                     |                     |                     |                     |                                                             | TOP PLUNGER TYPES |                                                             |      |      |
|-----------------------------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|-------------------------------------------------------------|-------------------|-------------------------------------------------------------|------|------|
| CHARACTERISTICS                                           | LSYC PLUNGER        |                     | LSYD ROLLER PLUNGER |                     | LSYV ADJ PLUNGER    |                     | SEQUENCE BASIC                                              |                   |                                                             |      |      |
|                                                           |                     |                     |                     |                     |                     |                     | LSYC                                                        | LSYD              | LSYV                                                        |      |      |
| PRETRAVEL (MAX)                                           | .070                |                     | .070                |                     | .070                |                     | 1ST STEP .070<br>2ND STEP .016 MIN ADD'L                    |                   |                                                             |      |      |
| DIFFERENTIAL TRAVEL (MAX)                                 | SINGLE POLE<br>.015 | DOUBLE POLE<br>.020 | SINGLE POLE<br>.015 | DOUBLE POLE<br>.020 | SINGLE POLE<br>.015 | DOUBLE POLE<br>.020 | .015 EACH STEP                                              |                   |                                                             |      |      |
| OVERTRAVEL (MIN)                                          | .190                |                     | .190                |                     | .190                |                     | .170                                                        |                   |                                                             |      |      |
| OPERATING FORCE (MAX)                                     | 4 LBS               |                     | 4 LBS               |                     | 4 LBS               |                     | 4 LBS                                                       |                   |                                                             |      |      |
| OPERATING POINT                                           | 1.805 ± .030        |                     | 2.200 ± .040        |                     | 2.085 MIN 2.335 MAX |                     | 1ST STEP<br>1.815±.030   2.210±.040   2.095 MIN / 2.345 MAX |                   |                                                             |      |      |
| FULL OVERTRAVEL FORCE (MAX)                               | 7 LBS               |                     | 7 LBS               |                     | 7 LBS               |                     | 7 LBS                                                       |                   |                                                             |      |      |
| OPERATING POINT GIVEN IN<br>RELATION TO CENTER OF HEAD    |                     |                     |                     |                     |                     |                     |                                                             |                   |                                                             |      |      |
| SIDE PLUNGER TYPES                                        |                     |                     |                     |                     |                     |                     |                                                             |                   |                                                             |      |      |
| CHARACTERISTICS                                           | LSYE PLUNGER        |                     | LSYF ROLLER PLUNGER |                     | LSYW ADJ PLUNGER    |                     | LSYG PLUNGER MAINTAINED                                     |                   | SEQUENCE BASIC                                              |      |      |
|                                                           |                     |                     |                     |                     |                     |                     |                                                             |                   | LSYE                                                        | LSYF | LSYW |
| PRETRAVEL (MAX)                                           | .100                |                     | .100                |                     | .100                |                     | .170                                                        |                   | 1ST STEP .100<br>2ND STEP .020 MIN ADD'L                    |      |      |
| DIFFERENTIAL TRAVEL (MAX)                                 | .045                |                     | .045                |                     | .045                |                     | .090                                                        |                   | .025 EACH STEP                                              |      |      |
| OVERTRAVEL (MIN)                                          | .190                |                     | .190                |                     | .190                |                     | .080                                                        |                   | .170                                                        |      |      |
| OPERATING FORCE (MAX)                                     | 6 LBS               |                     | 6 LBS               |                     | 6 LBS               |                     | 10 LBS                                                      |                   | 6 LBS                                                       |      |      |
| OPERATING POINT                                           | 1.300 ± .030        |                     | 1.735 ± .040        |                     | 1.615 MIN 1.865 MAX |                     | 1.480 ± .030                                                |                   | 1ST STEP<br>1.310±.030   1.745±.040   1.625 MIN / 1.875 MAX |      |      |
| FULL OVERTRAVEL FORCE (MAX)                               | 6 LBS               |                     | 6 LBS               |                     | 6 LBS               |                     | 10 LBS                                                      |                   | 6 LBS                                                       |      |      |


# WOBBLE STICK

## SINGLE POLE


## DOUBLE POLE

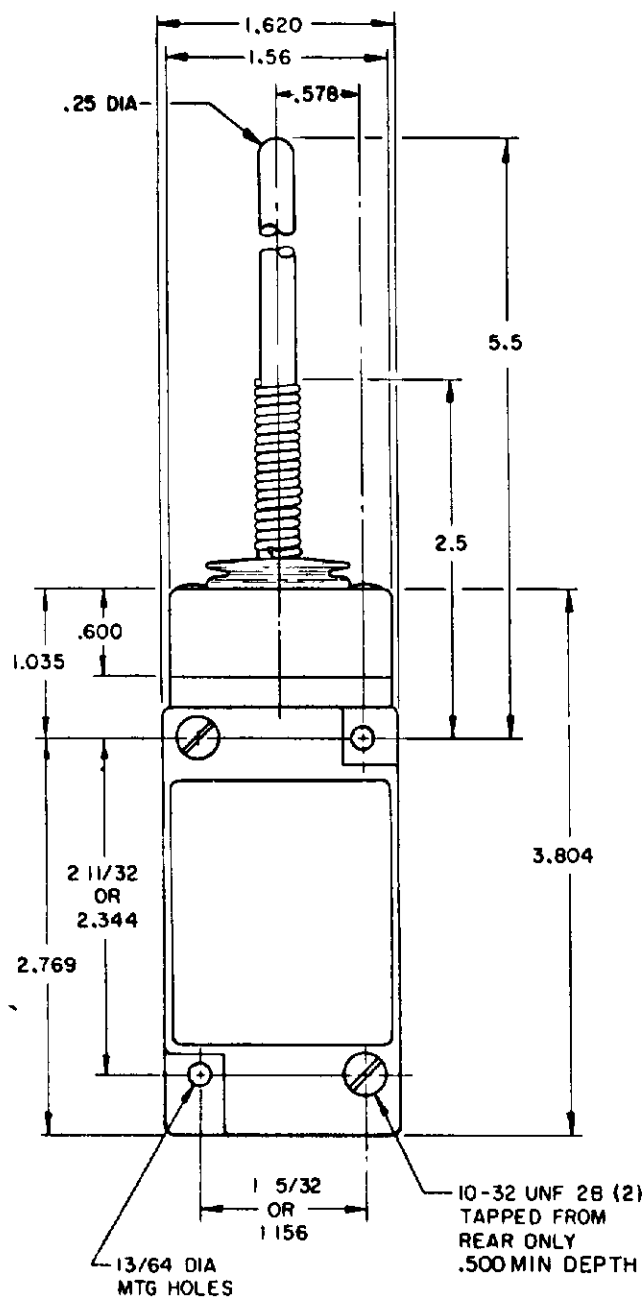


**PLASTIC EXTENSION  
TYPE 7A ACTUATOR**

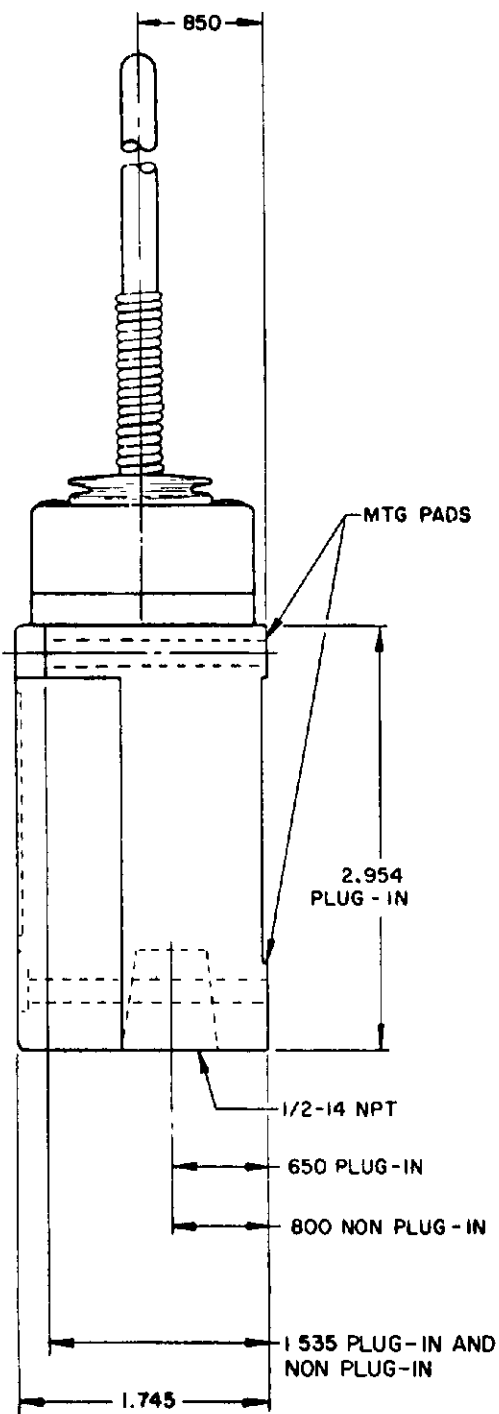


**REPLACEMENT ACTUATOR  
LSZ 4009**

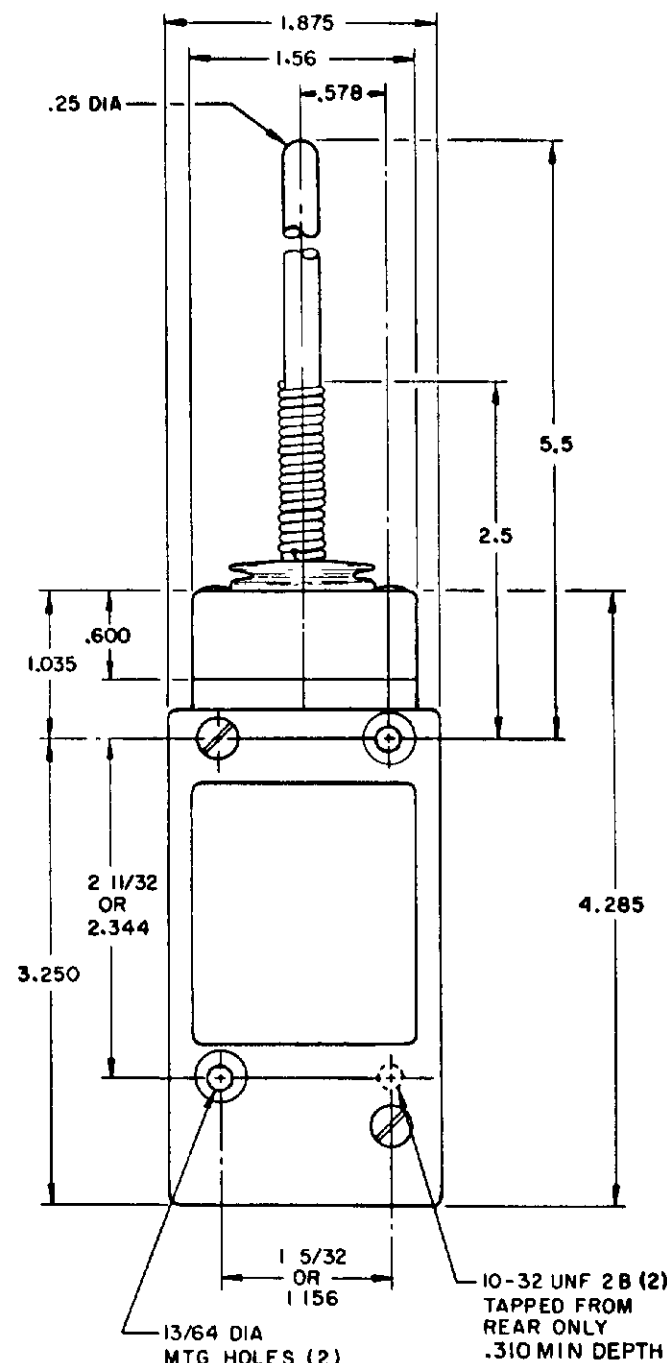


**PLASTIC EXTENSION  
TYPE 7A ACTUATOR**

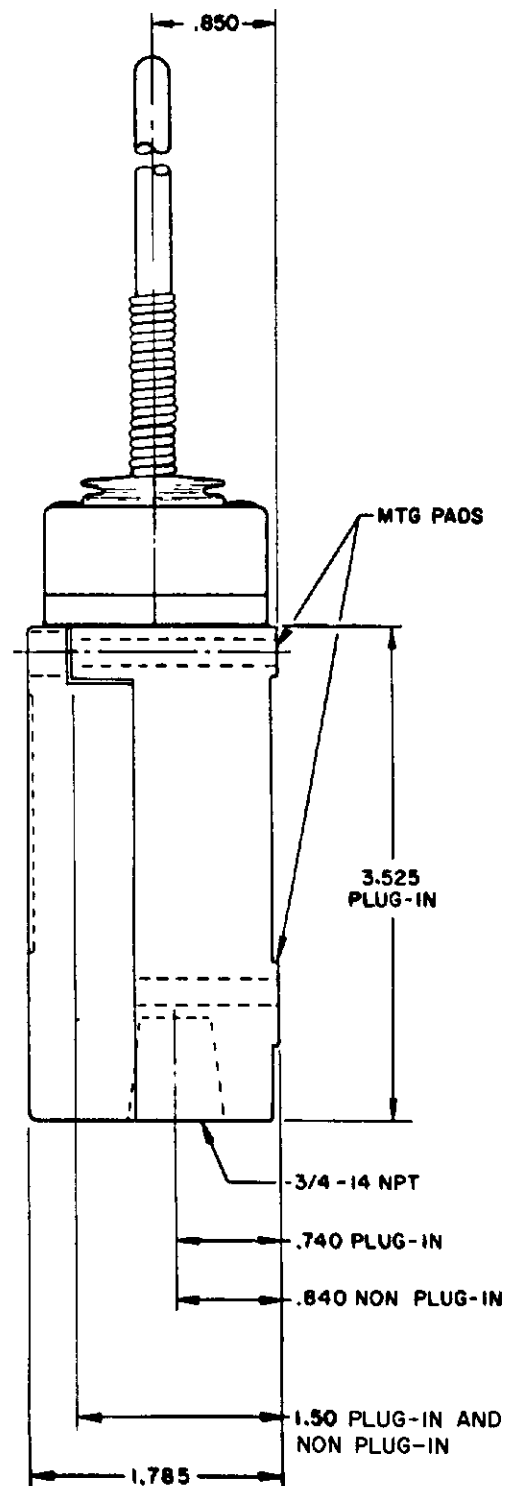

**REPLACEMENT ACTUATOR  
LSZ 4011**

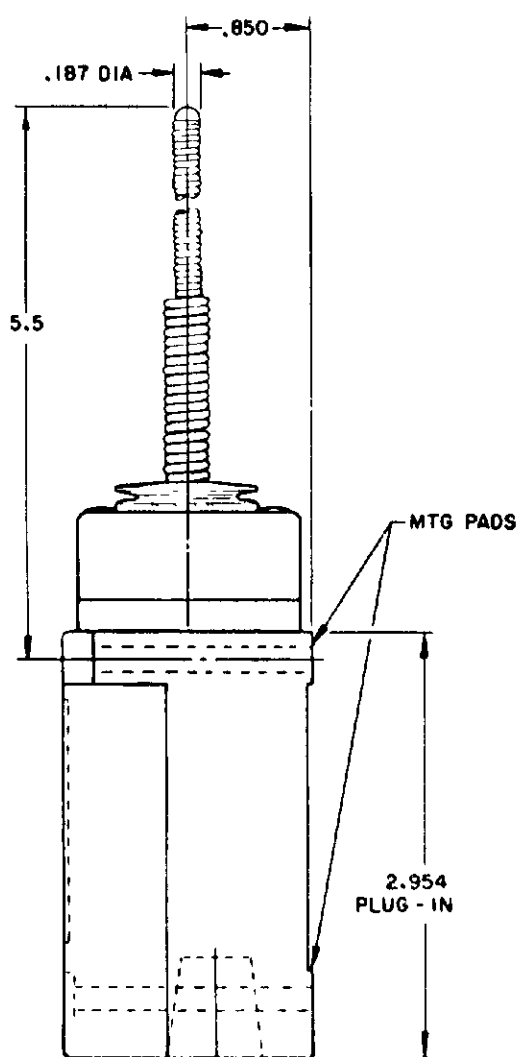


**CABLE EXTENSION  
TYPE 7N ACTUATOR**

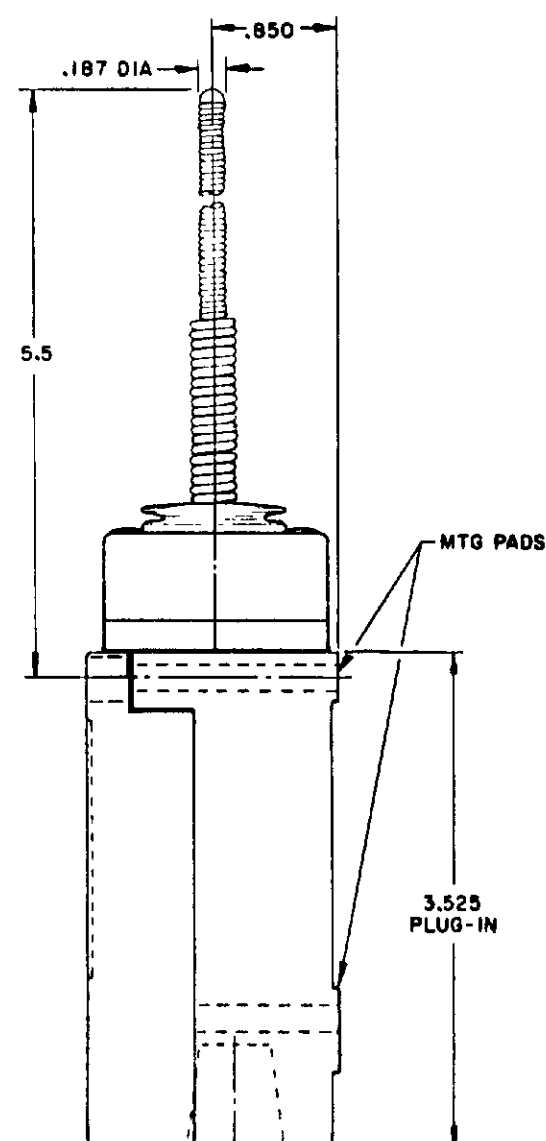

**CABLE EXTENSION  
TYPE 7N ACTUATOR**

MANIFOLD MOUNT (PLUG-IN ONLY)  
SINGLE POLE AND DOUBLE POLE  
TYPE LSYA THROUGH LSYW SERIES

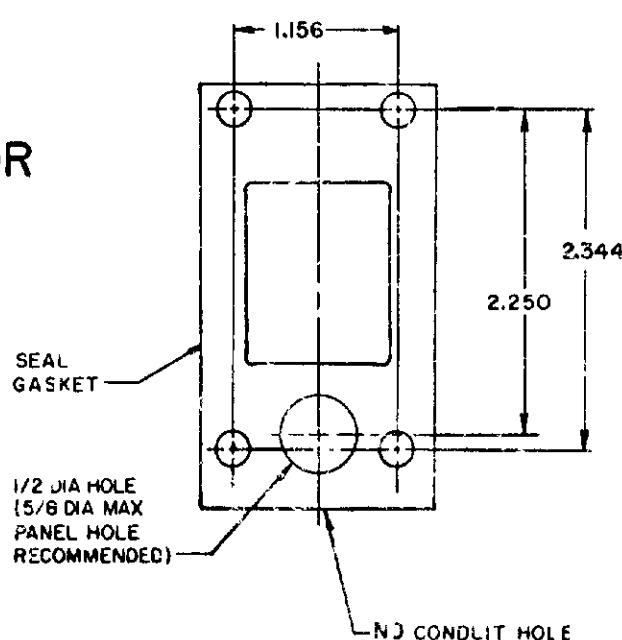

NOTES:  
1 - ALL UNITS AVAILABLE WITH  
FLOUROSILICONE AND VITON SEALS

**MICRO SWITCH**  
FREEPORT ILLINOIS U.S.A.  
A DIVISION OF HONEYWELL

**SWITCH-ENCLOSED**


**CHART 1**

**LSY SERIES**

SCALE NONE  
DO NOT SCALE PRINT


|           |       |     |           |       |    |         |       |     |         |            |          |          |            |
|-----------|-------|-----|-----------|-------|----|---------|-------|-----|---------|------------|----------|----------|------------|
| 24 AUG 94 | CHECK | SAF | 12 SEP 74 | CHECK | AK | 19APR05 | CHECK | PSR | 10JUL07 | RELEASE NO | CO-78499 | REPLACES | LSY SERIES |
|-----------|-------|-----|-----------|-------|----|---------|-------|-----|---------|------------|----------|----------|------------|

|       |                    |
|-------|--------------------|
| ISSUE | CATALOG LISTING    |
| 7     | LSY SERIES CHART 1 |
| PAGE  | 8 OF 10            |

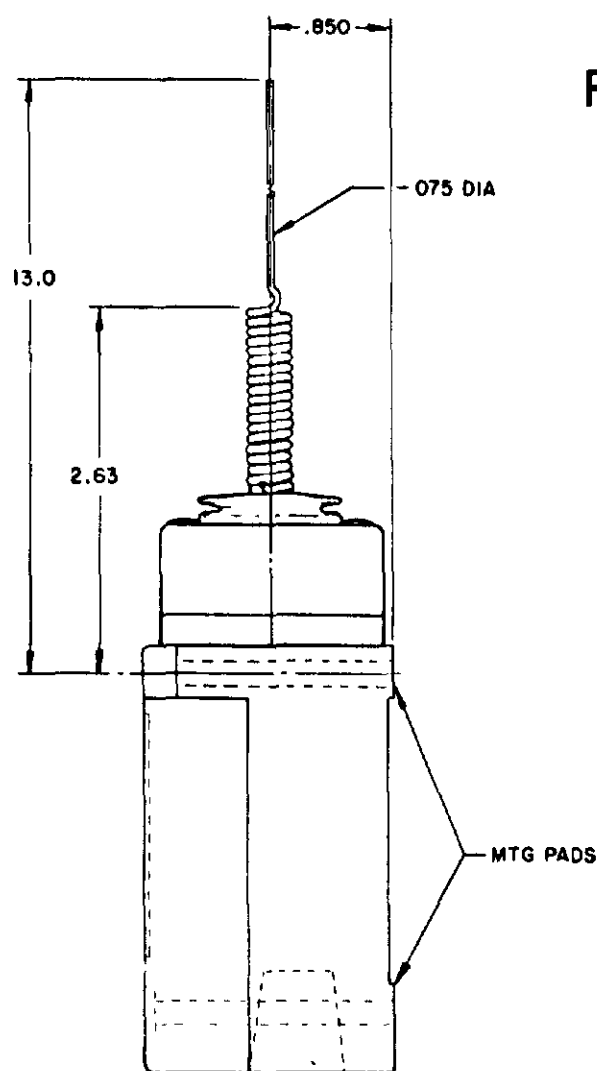


### REPLACEMENT ACTUATOR LSZ4010

SINGLE POLE PLUG-IN ONLY  
WITH INDICATOR LAMP

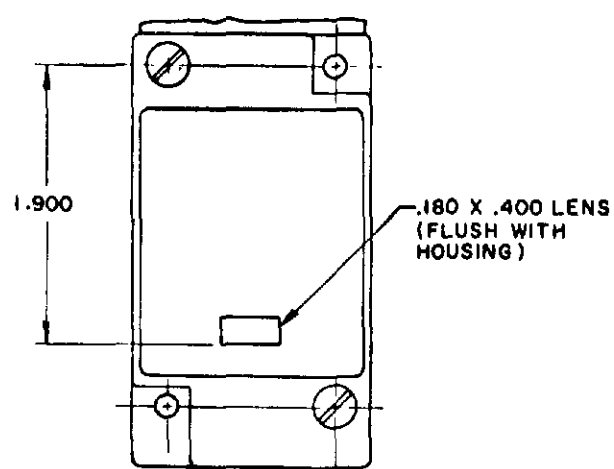

120 LAMP VOLTAGE TYPE-LSYJB5 & LSYJC5  
240 LAMP VOLTAGE TYPE-LSYJB8 & LSYJC8

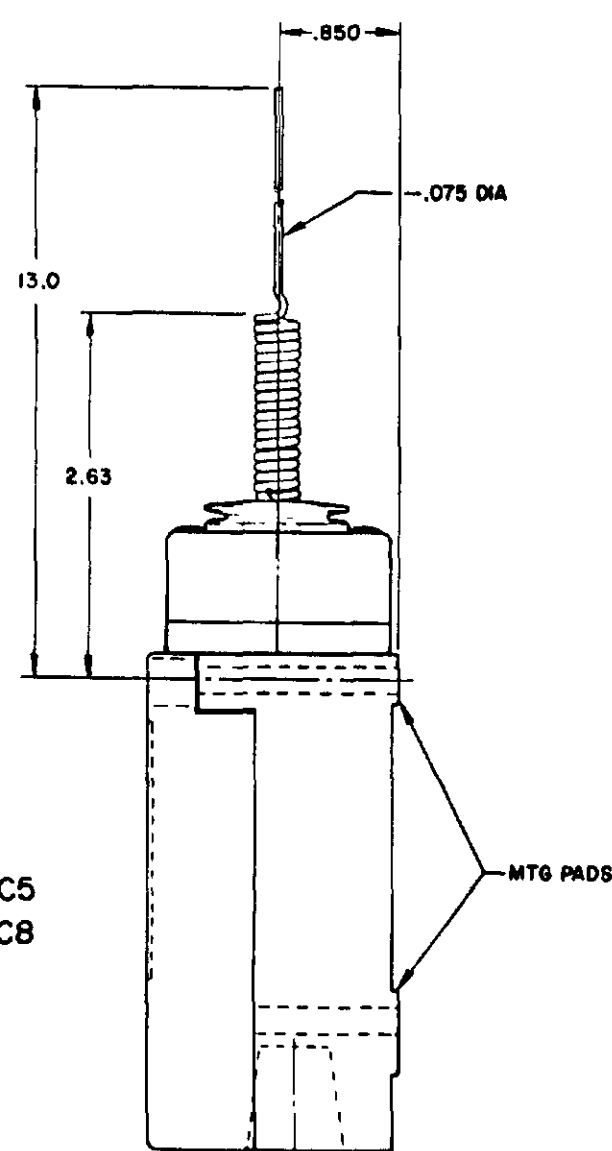

### WIRE EXTENSION TYPE 7M ACTUATOR

FLOUROSILICONE SEALS  
LSYJB1 & LSYJB3

VITON SEALS  
LSYJC1 & LSYJC3

### WIRE EXTENSION TYPE 7M ACTUATOR

FLOUROSILICONE SEALS  
LSYJB2 & LSYJB4


LSYJB6 & LSYJB7 HAVE 1/2-14 NPT CONDUIT HOLE

VITON SEALS LSYJC2 & LSYJC4  
LSYJC6 & LSYJC7 HAVE 1/2-14 NPT CONDUIT HOLE

### REPLACEMENT ACTUATOR LSZ 4010

## CAT WHISKER

### SINGLE POLE

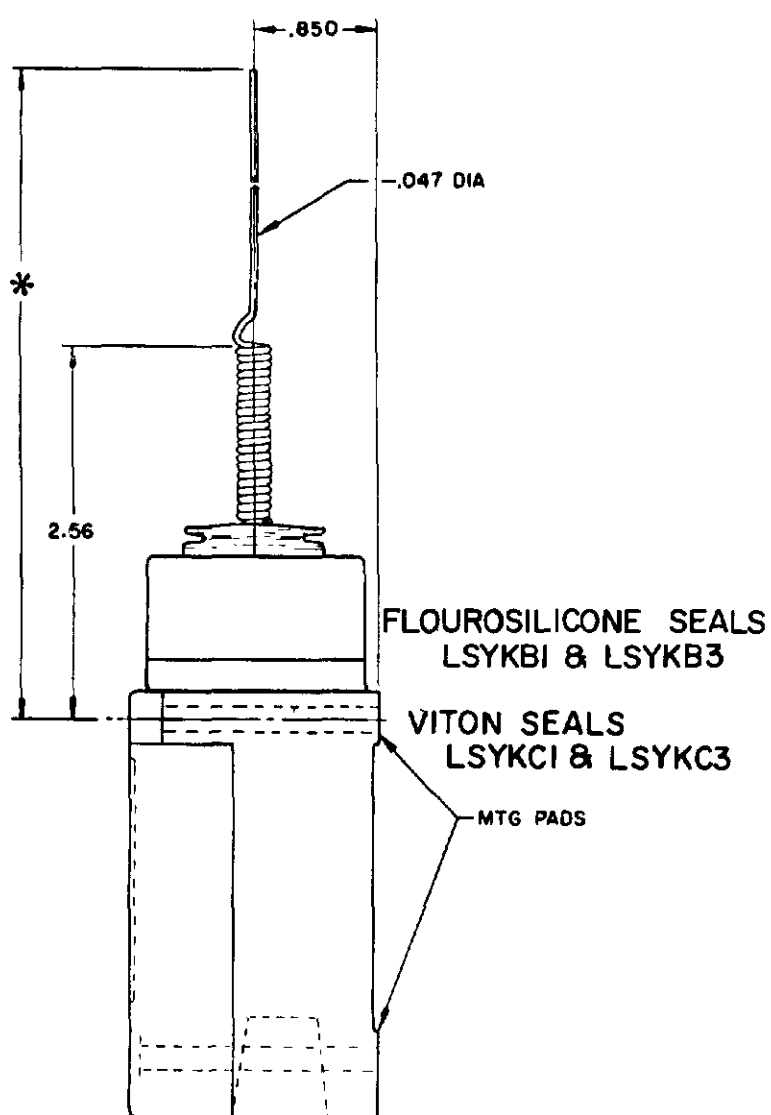


FLOUROSILICONE SEALS  
LSYKB1 & LSYKB3

VITON SEALS  
LSYKC1 & LSYKC3

### WIRE EXTENSION

\*TYPE 8A ACTUATOR 5.5 IN.  
TYPE 8B ACTUATOR 7.5 IN.  
TYPE 8C COIL ACTUATOR 5.5 IN


SINGLE POLE PLUG-IN ONLY  
WITH INDICATOR LAMP

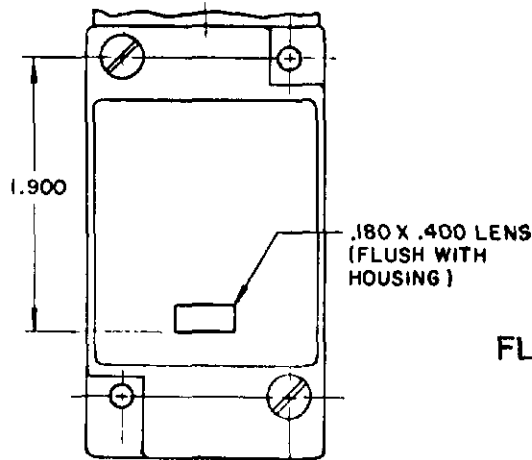

FLOUROSILICONE SEALS  
120 LAMP VOLTAGE  
LSYKB5 CAT WHISKER LSYBB5 TOP ROTARY  
240 LAMP VOLTAGE  
LSYKB8 CAT WHISKER LSYBB8 TOP RATARY

VITON SEALS  
120 LAMP VOLTAGE  
LSYKC5 CAT WHISKER LSYBC5 TOP ROTARY  
240 LAMP VOLTAGE  
LSYKC8 CAT WHISKER LSYBC8 TOP ROTARY

### DOUBLE POLE

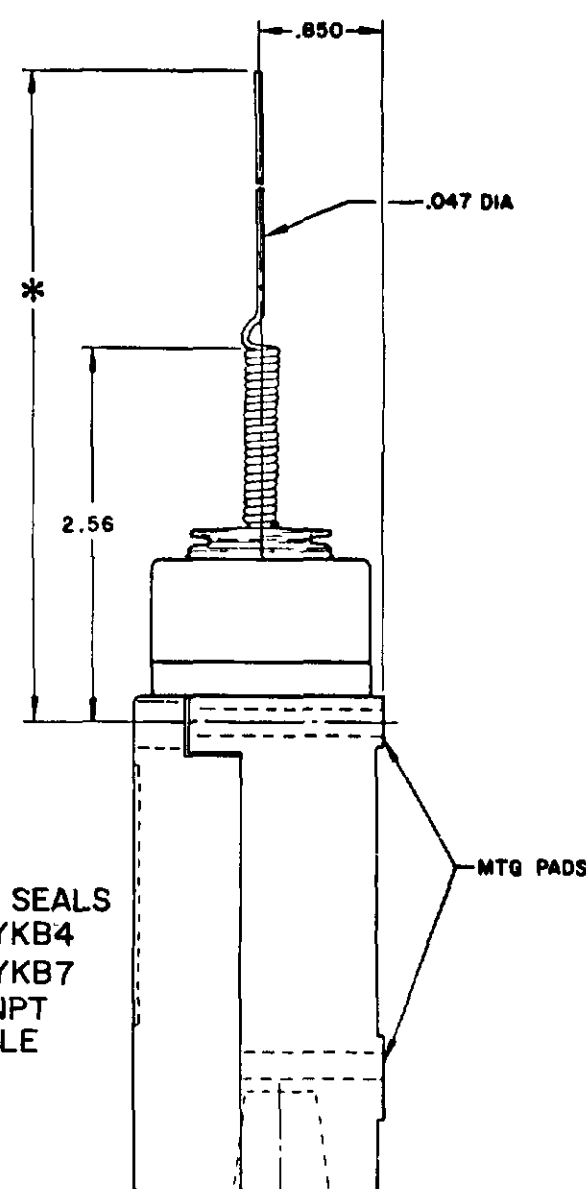

FLOUROSILICONE SEALS  
LSYKB2 & LSYKB4  
LSYKB6 & LSYKB7  
HAVE 1/2-14 NPT  
CONDUIT HOLE

### WIRE EXTENSION REPLACEMENTS

\*TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012  
TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013  
TYPE 8C ACTUATOR 5.5 IN.-LSZ 4014

MICRO SWITCH  
FREEDPORT ILLINOIS U.S.A.  
A DIVISION OF HONEYWELL  
FED. REG. CODE 91999

SWITCH-ENCLOSED

CHART 1

LSY SERIES

SCALE NONE  
DO NOT SCALE PRINT


|                               | CAT WHISKER |             |             | WOBBLE STICK |       |      |
|-------------------------------|-------------|-------------|-------------|--------------|-------|------|
|                               | 5 1/2" COIL | 5 1/2" WIRE | 7 1/2" WIRE | ROD          | CABLE | WIRE |
| PRETRAVEL (APPROX) IN. RADIUS | 2           | 2           | 4.5         | 1.0          | 1.5   | 4.0  |
| OPERATING FORCE-OZ (MAX)      | 7.0         | 5.0         | 3.0         | 10.0         | 7.0   | 5.0  |

NOTE-  
1 - ALL UNITS AVAILABLE WITH  
FLOUROSILICONE AND VITON SEALS


CONVERSION BASES

SINGLE POLE  
(SIDE ROTARY)  
LSZ 4003

DOUBLE POLE  
(SIDE ROTARY)  
LSZ4004

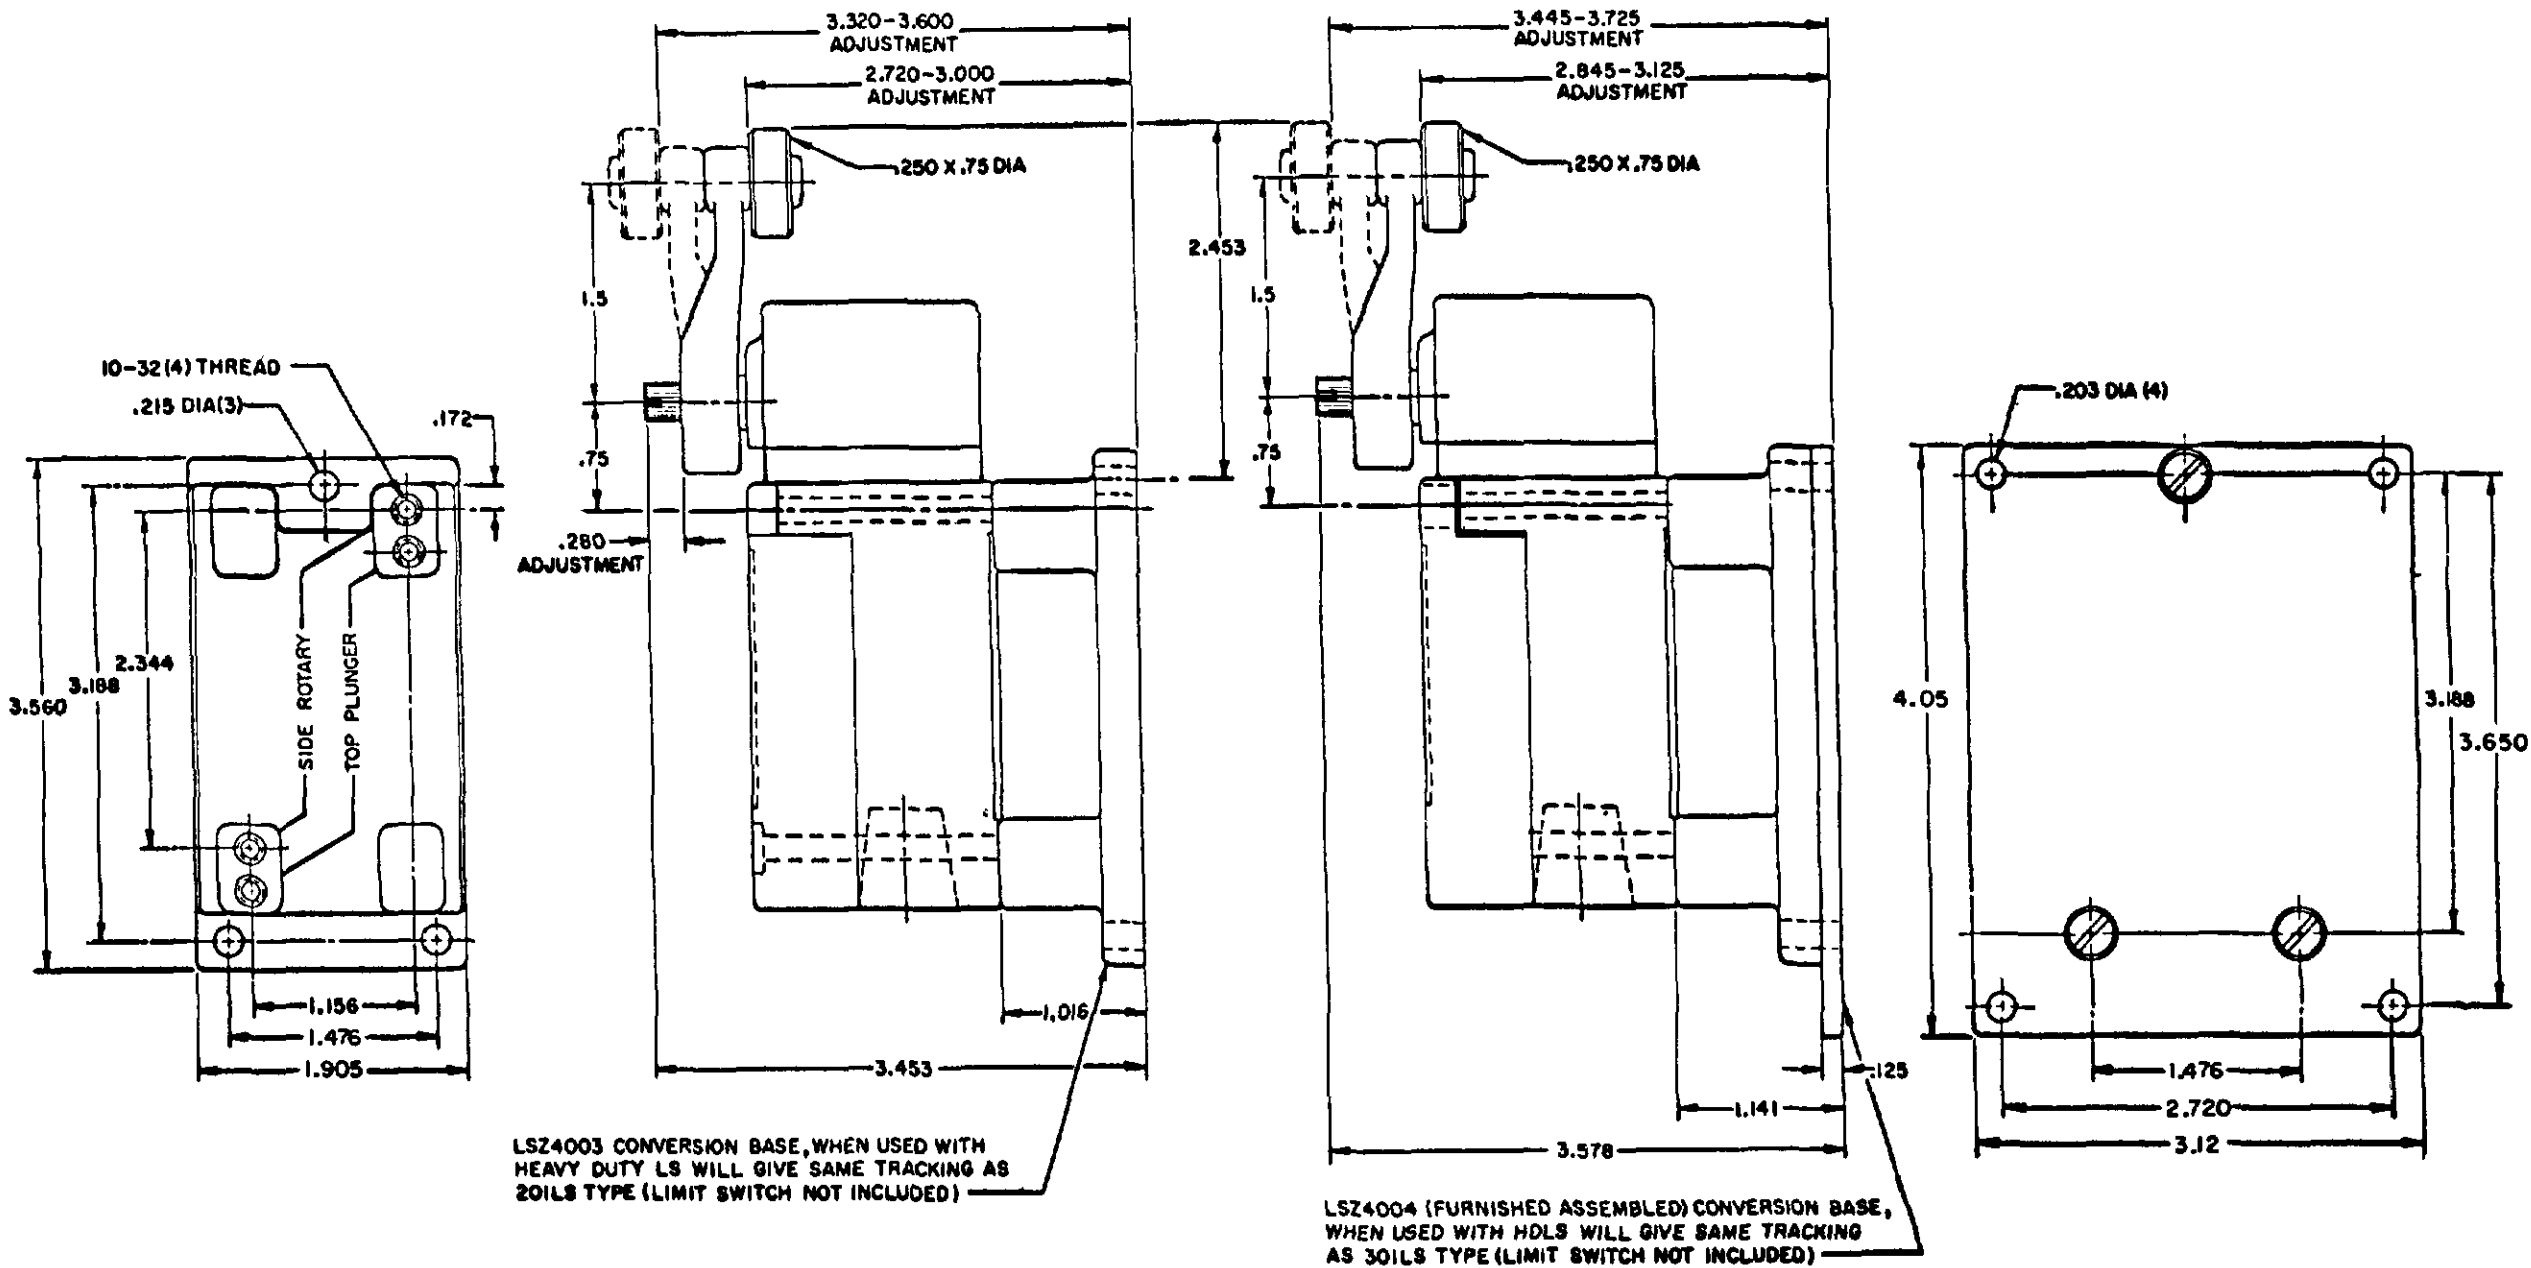

SINGLE POLE  
TOP PLUNGER  
LSZ4003

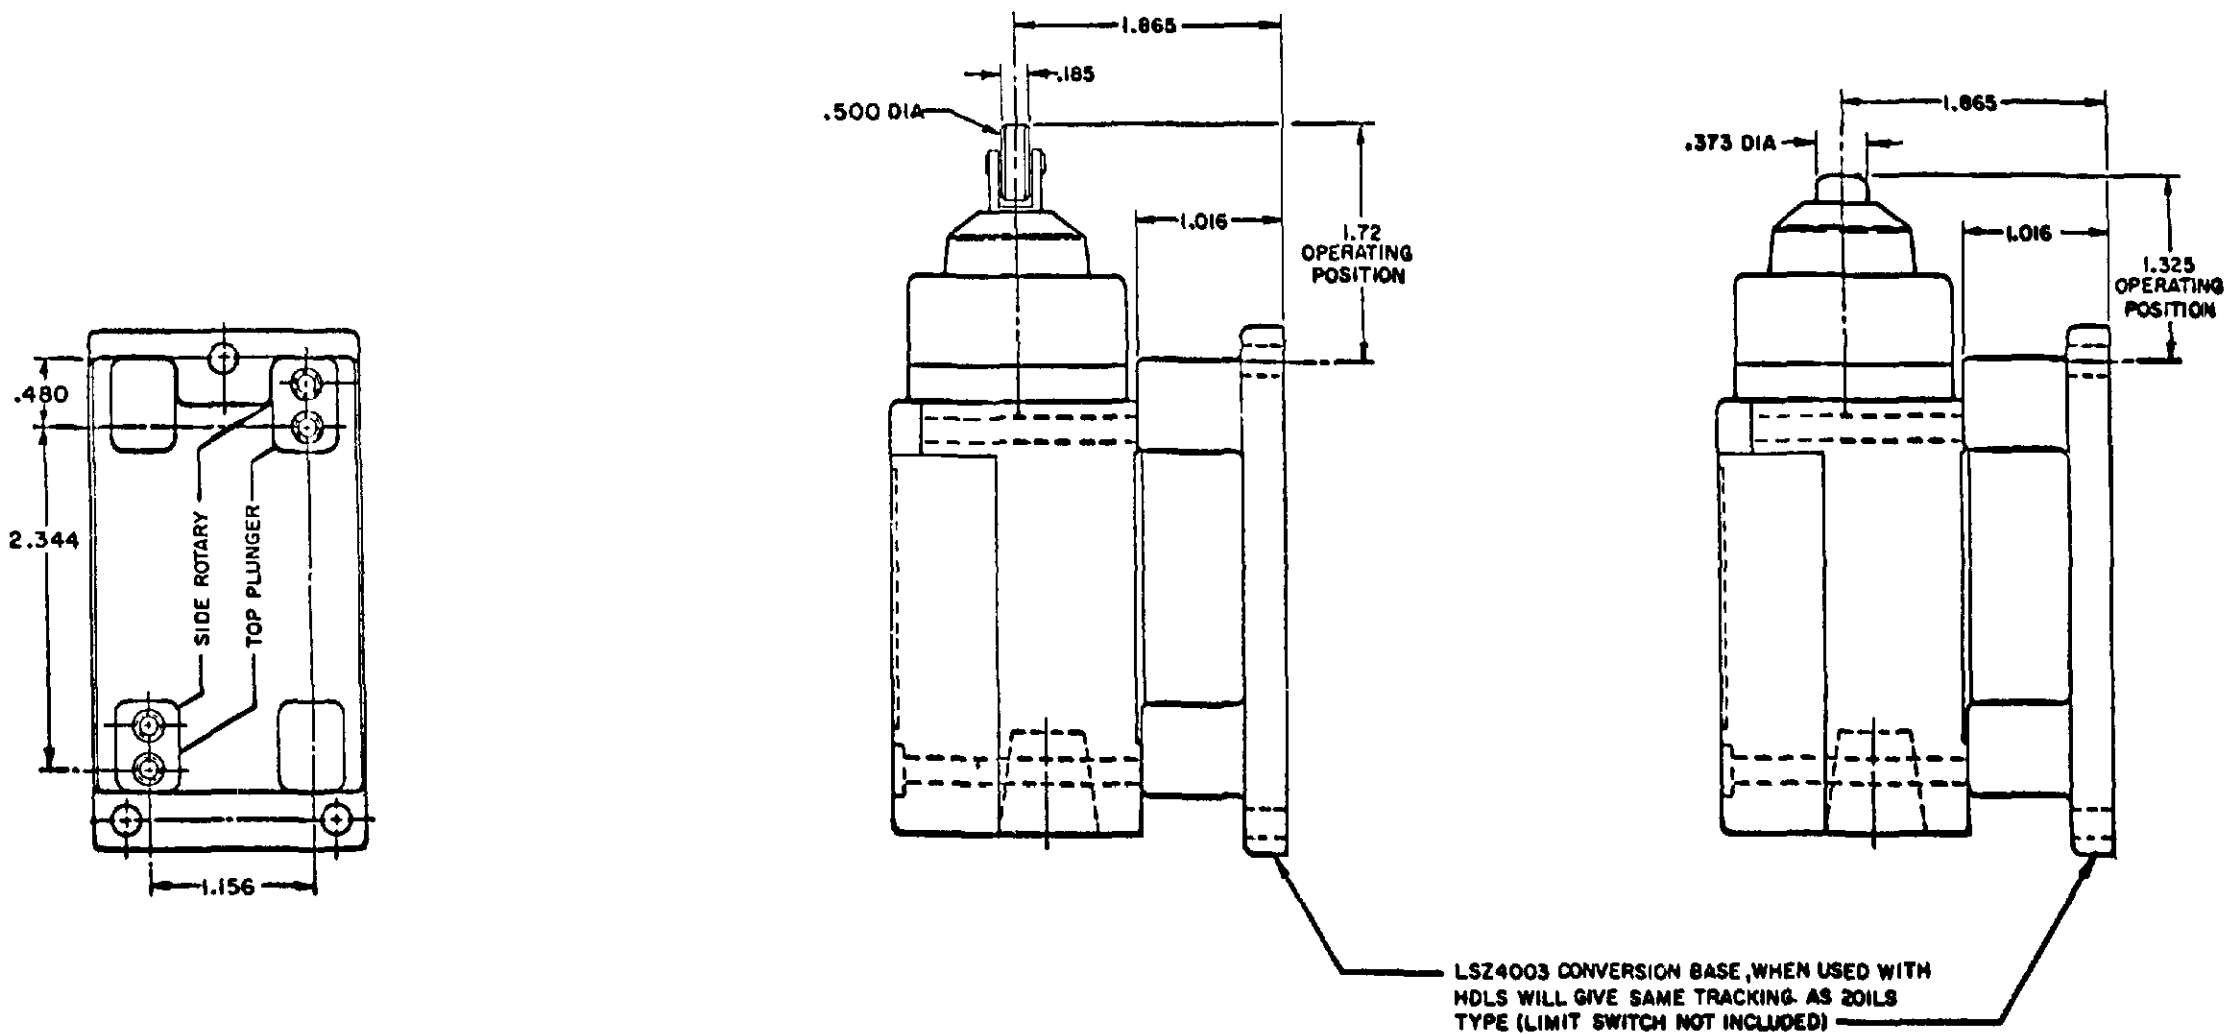

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**MICRO SWITCH**  
A DIVISION OF HONEYWELL  
FID. MFG. CODE 9188

**SWITCH - ENCLOSED**

**LSY SERIES**  
CATALOG LISTING  
**CHART 1**

SCALE FULL  
DO NOT SCALE PRINT

TEMPERATURE LIMITATIONS FOR  
DEVICES WITH FLUORSILICONE (LSYAB\*\*) AND VITON (LSYAC\*\*) SEALS

|                                    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|------------------------------------|--|------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| ALL HEAD<br>TYPES WITH<br>SEALS OF |  | CELLULUBE                    |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | DETERGENT                    |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| FLUOR-<br>SILICONE                 |  | 5 STAR                       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | ASTM #1                      |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| VITON                              |  | ASTM #2                      |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | ASTM #3                      |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | ASTM #4                      |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | HOUGHTON SAFE 271            |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | HOUGHTON SAFE 260            |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | 1010, 1055, 1120             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | MINERAL OIL                  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | PETR. OIL CRUDE              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | SILICON GR & OIL             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | SUNSAFE                      |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | BEER                         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | STODDARD SOLV.               |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | CHLORINATED<br>SOLVENTS      |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | CITRIC ACID                  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | DI-ESTER SYN.<br>LUBRICANTS  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | OZONE                        |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | PYDRAU:                      |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | PYROGUARD                    |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | PETRO. BASE<br>HYDRAULIC OIL |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | LARD OIL                     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  | SILICATE ESTERS              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                                    |  |                              |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

- 1 FLUORSILICONE SEAL (LSYAB\*\*) FOR LOW TEMPERATURE APPLICATIONS
- 2 VITON SEALS (LSYAC\*\*) FOR FIRE-RESISTANT FLUIDS
- 3 ALL EXCEPT A60

|       | LOW LIMIT | HIGH LIMIT |
|-------|-----------|------------|
| LSYAB | -40°F     | +250°F     |
| LSYAC | +10°F     | +250°F     |
| LSYBB | -20°F     | +250°F     |
| LSYBC | +30°F     | +250°F     |
| LSYCB | -40°F     | +200°F     |
| LSYCC | +10°F     | +250°F     |
| LSYDB | -40°F     | +200°F     |
| LSYDC | +10°F     | +250°F     |
| LSYEB | -40°F     | +200°F     |
| LSYEC | +10°F     | +250°F     |
| LSYFB | -40°F     | +200°F     |
| LSYFC | +10°F     | +250°F     |
| LSYGB | -20°F     | +200°F     |
| LSYGC | +30°F     | +250°F     |
| LSYHB | -20°F     | +250°F     |
| LSYHC | +30°F     | +250°F     |
| LSYJB | -40°F     | +250°F     |
| LSYJC | +30°F     | +250°F     |
| LSYKB | -20°F     | +250°F     |
| LSYKC | +30°F     | +250°F     |
| LSYLB | -40°F     | +250°F     |
| LSYLC | +10°F     | +250°F     |
| LSYMB | -40°F     | +250°F     |
| LSYMC | +10°F     | +250°F     |
| LSYNB | -20°F     | +250°F     |
| LSYNC | +30°F     | +250°F     |
| LSYPB | -40°F     | +250°F     |
| LSYPC | +10°F     | +250°F     |
| LSYRB | -20°F     | +250°F     |
| LSYRC | +30°F     | +250°F     |
| LSYVB | -40°F     | +200°F     |
| LSYVC | +10°F     | +250°F     |
| LSYWB | -40°F     | +200°F     |
| LSYWC | +10°F     | +250°F     |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9