
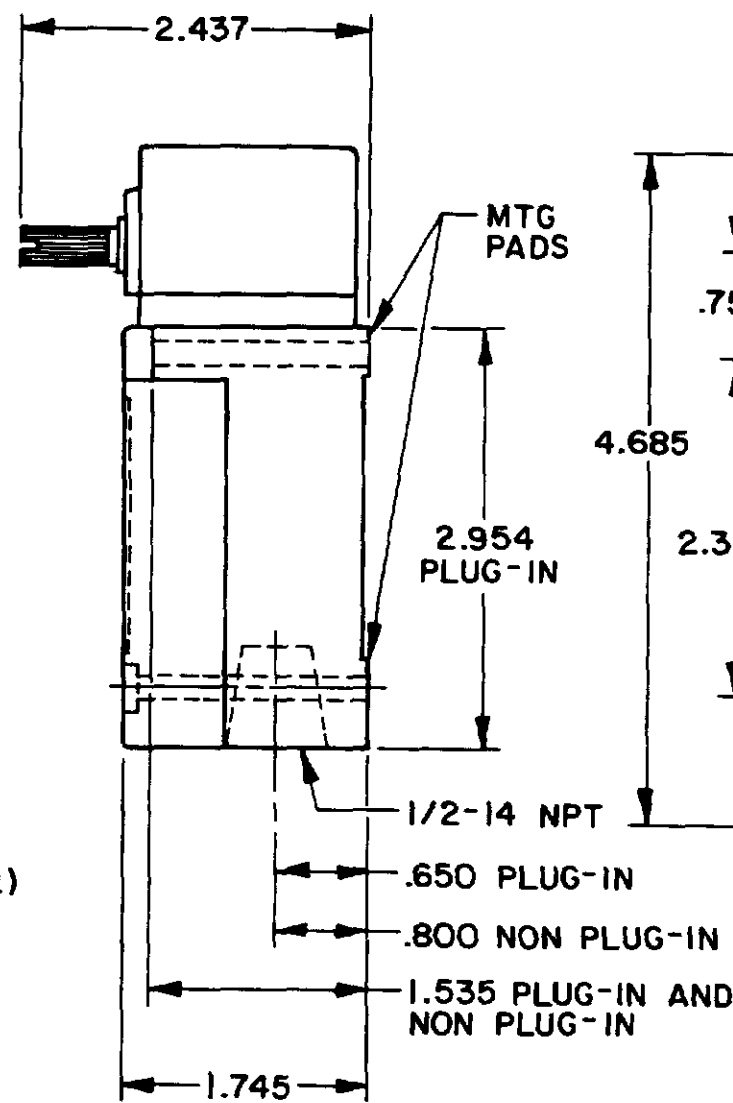


OPERATING CHARACTERISTICS	LSYA MOMENTARY	LSYR MOMENTARY LOW TORQUE	LSYN MAINTAINED	LSYP MOMENTARY LOW PRETRAVEL AND DIFF. TRAVEL	LSYH MOMENTARY LOW PRETRAVEL AND LOW TORQUE	LSYL SEQUENCE DOUBLE POLE ONLY	LSYM CENTER NEUTRAL DOUBLE POLE ONLY	LSYS GRAVITY RETURN	LSYU LOW PRETRAVEL
PRETRAVEL(MAX)	15°	15°	65°	9°	9°	1ST STEP 15° 2ND STEP 10° ADD'L	18°	NOT APPLICABLE	5°
OVERTRAVEL(MIN)	60°	60°	20°	68°	68°	48°	57°	NOT APPLICABLE	70°
DIFFERENTIAL TRAVEL(MAX)	SINGLE POLE 5° DOUBLE POLE 7°	SINGLE POLE 5° DOUBLE POLE 7°	40°	SINGLE POLE 3° DOUBLE POLE 4°	SINGLE POLE 3° DOUBLE POLE 4°	5°	10°	12°	SGL POLE 3° DBL POLE 4°
TOTAL TRAVEL (REF)	75°	75°	90°	75°	75°	75°	75°	360°	75°
OPERATING TORQUE(MAX)	4 IN. LBS	1.7 IN. LBS	4 IN. LBS	4 IN. LBS	1.7 IN. LBS	4 IN. LBS	4 IN. LBS	5 IN-OZ	4 IN. LBS
FULL TRAVEL TORQUE(MAX)	4 IN. LBS	1.7 IN. LBS		4 IN. LBS	1.7 IN. LBS	4 IN. LBS	4 IN. LBS	5 IN-OZ	4 IN. LBS

SIDE ROTARY



SINGLE POLE

DOUBLE POLE

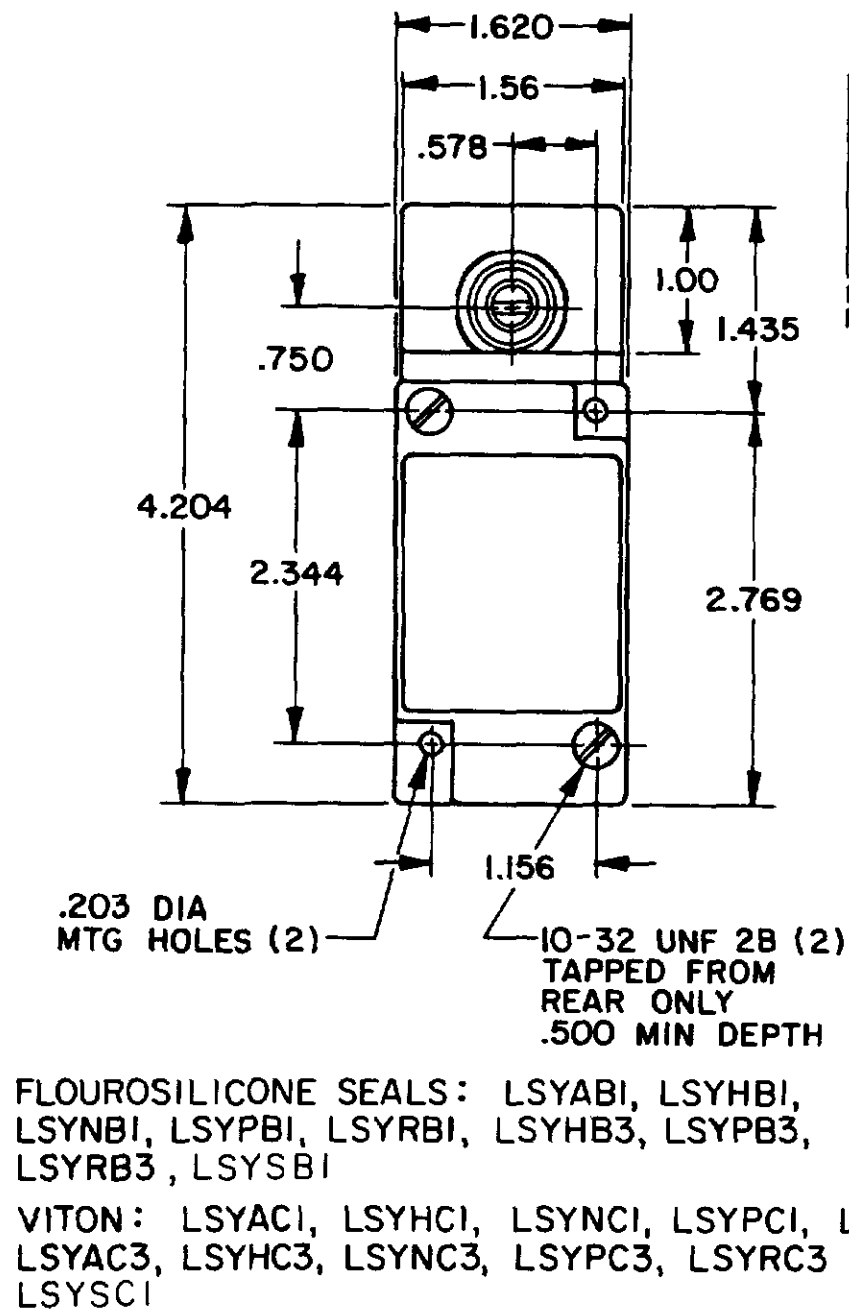


FLOUROSILICONE SEALS: LSYAB2, LSYHB2, LSYMB2, LSYNB2, LSYPB2, LSYRB2, LSYAB4, LSYHB4, LSYMB4, LSYNB4, LSYPB4, LSYRB4

* (LSYAB6, LSYHB6, LSYMB6, LSYNB6, LSYPB6, LSYRB6, LSYAB7, LSYHB7, LSYMB7, LSYNB7, LSYPB7, LSYRB7 HAVE 1/2-14 CONDUIT HOLE)

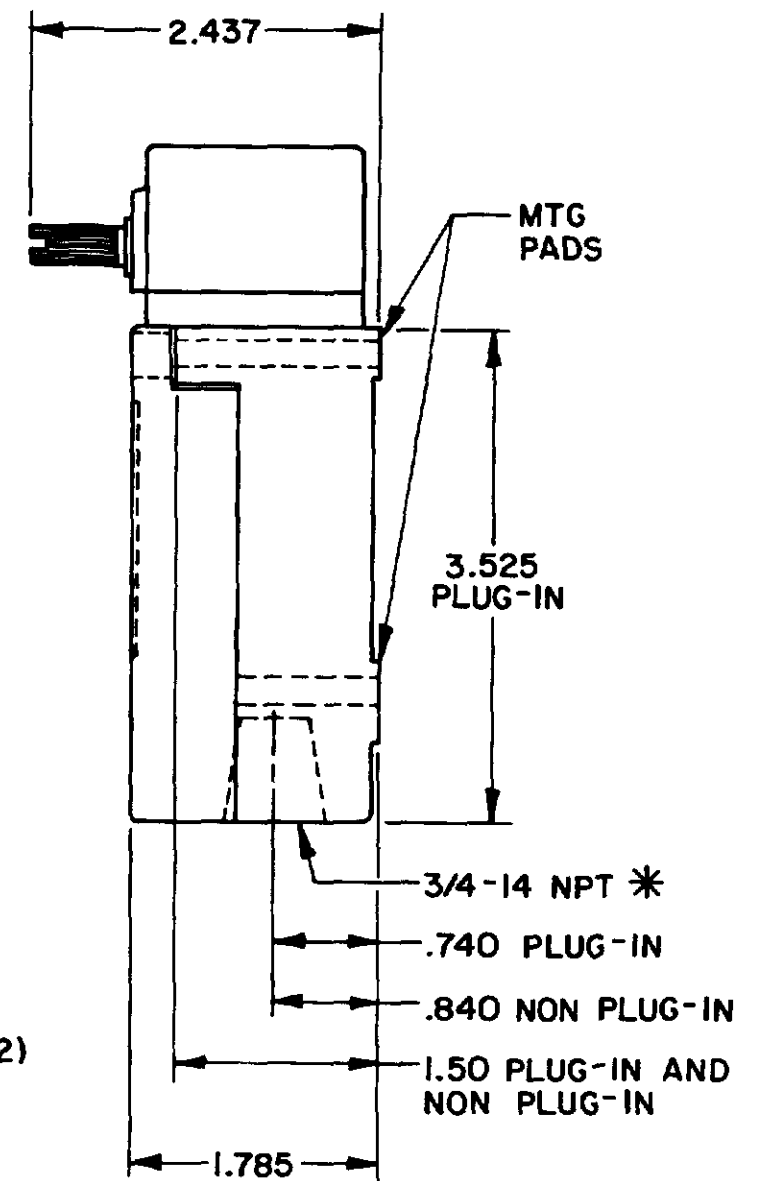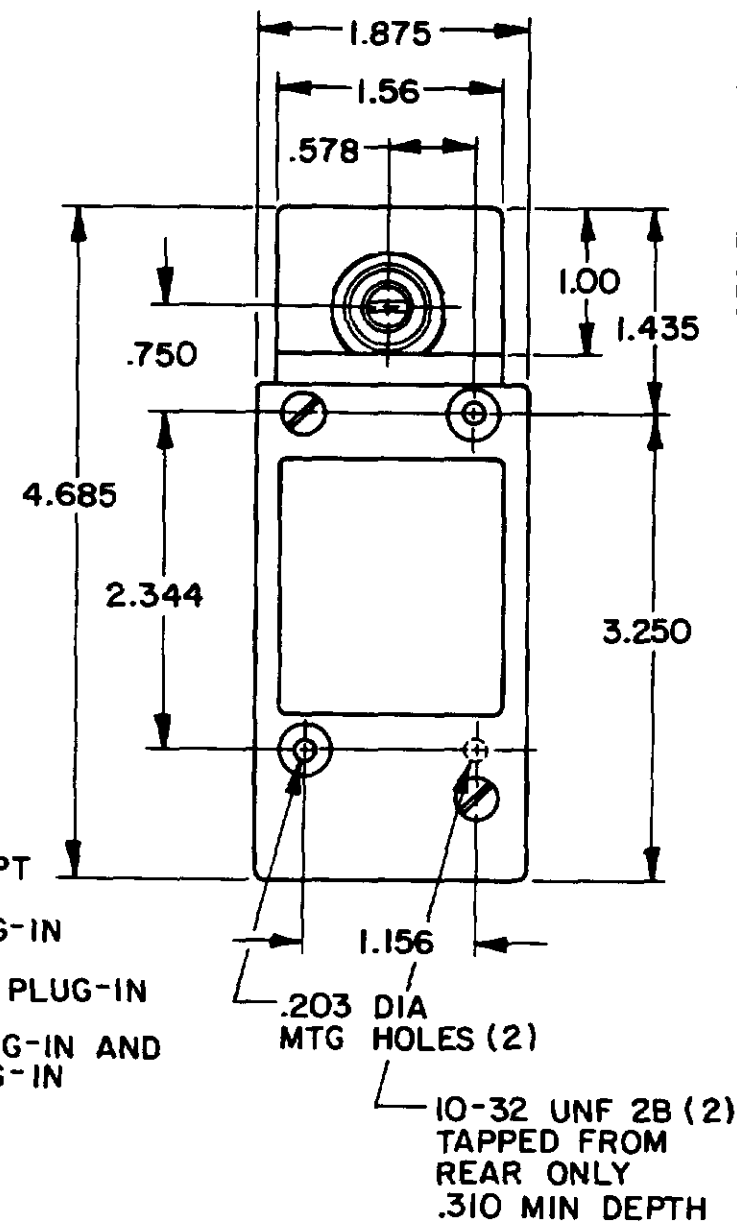


VITON SEALS: LSYAC2, LSYHC2, LSYNC2, LSYPC2, LSYRC2, LSYAC4, LSYHC4, LSYNC4, LSYPC4, LSYRC4, LSYMC2, LSYMC4, LSYMC6, LSYMC7, LSYLC2, LSYLC4, LSYLC6, LSYLC7

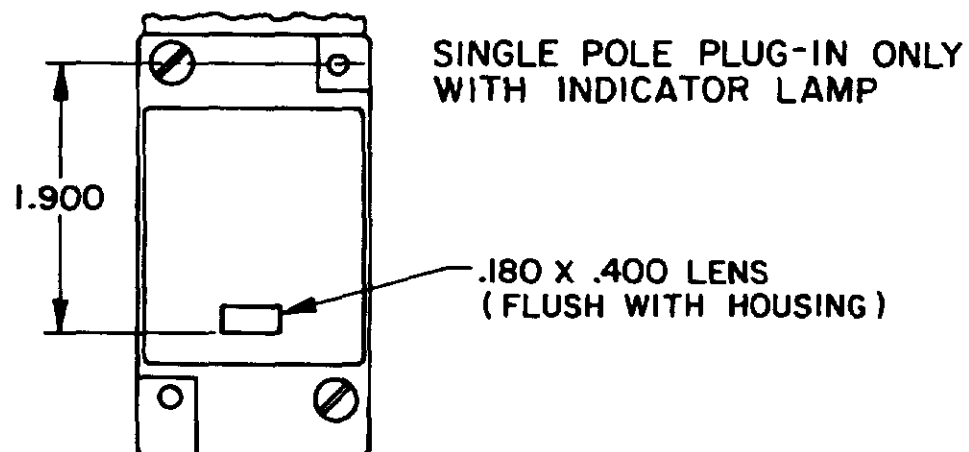


120 LAMP VOLTAGE -
 TYPE LSYAB5, LSYHB5, LSYNB5, LSYPB5, LSYRB5, LSYAC5, LSYHC5, LSYNC5, LSYPC5, LSYRC5

240 LAMP VOLTAGE -
 TYPE LSYAB8, LSYHB8, LSYNB8, LSYPB8, LSYRB8, LSYAC8, LSYHC8, LSYNC8, LSYPC8, LSYRC8

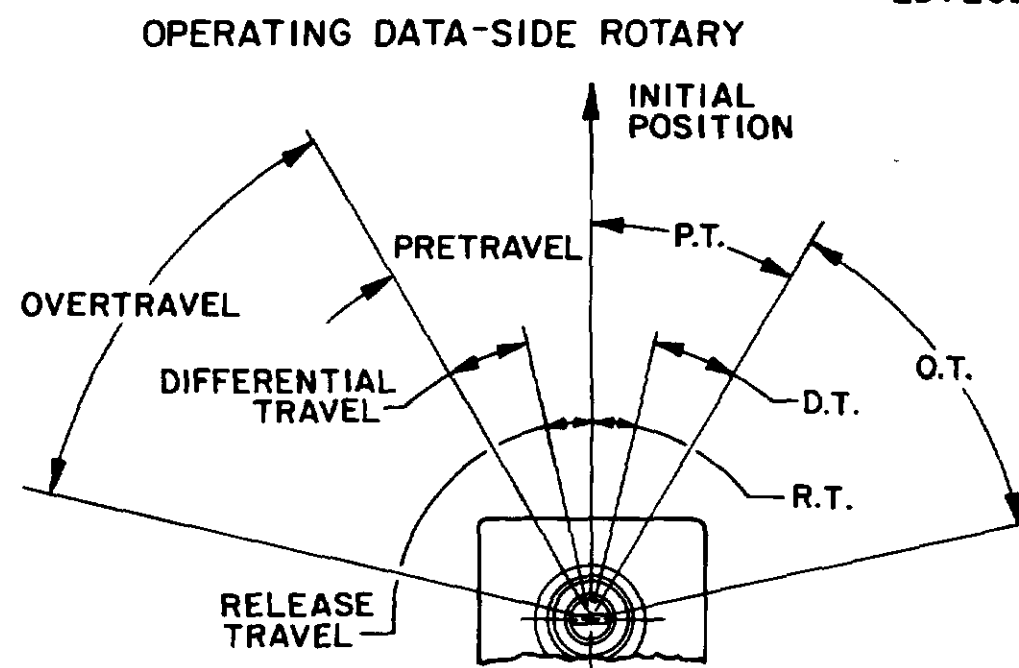

MANIFOLD MOUNT (PLUG-IN ONLY)
 SINGLE POLE AND DOUBLE POLE
 TYPE LSYA THROUGH LSYW SERIES


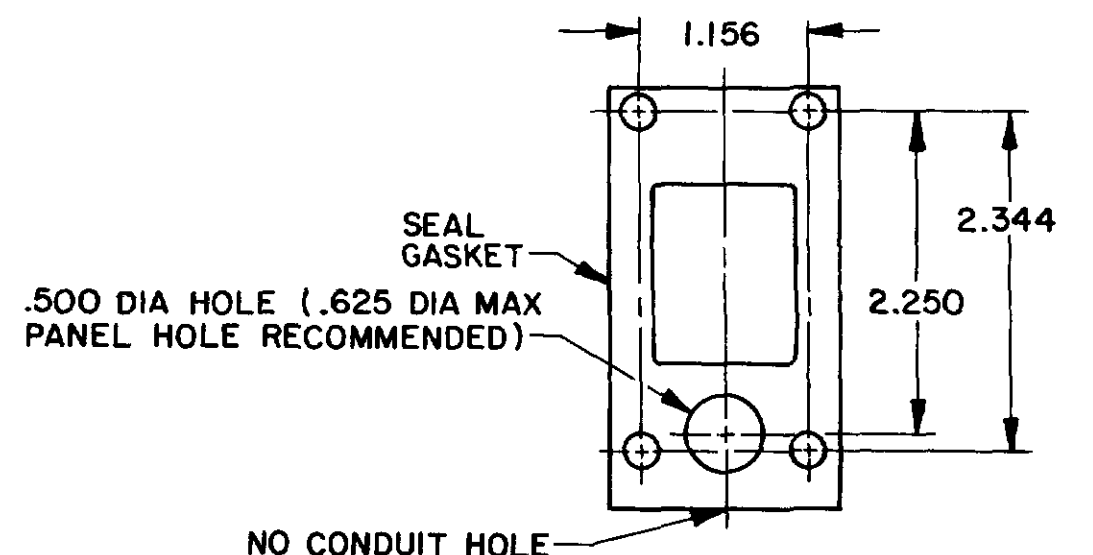


NOTE
 1 - ALL UNITS AVAILABLE WITH
 FLUOROSILICONE AND VITON SEALS



MICRO SWITCH
 SWITCH-ENCLOSED
 CHART 1
 LSY SERIES
 CATALOG LISTING

DESIGN UNIT	WEIGHT
1.00	0.10
1.50	0.15
2.00	0.20
2.50	0.25
3.00	0.30
3.50	0.35
4.00	0.40
4.50	0.45
5.00	0.50
5.50	0.55
6.00	0.60
6.50	0.65
7.00	0.70
7.50	0.75
8.00	0.80
8.50	0.85
9.00	0.90
9.50	0.95
10.00	1.00



SIDE ROTARY CAM TRACKING

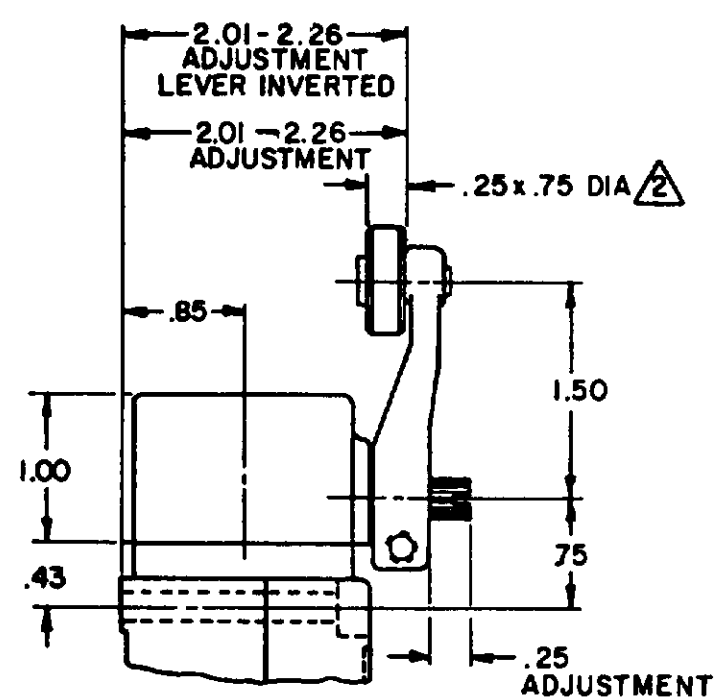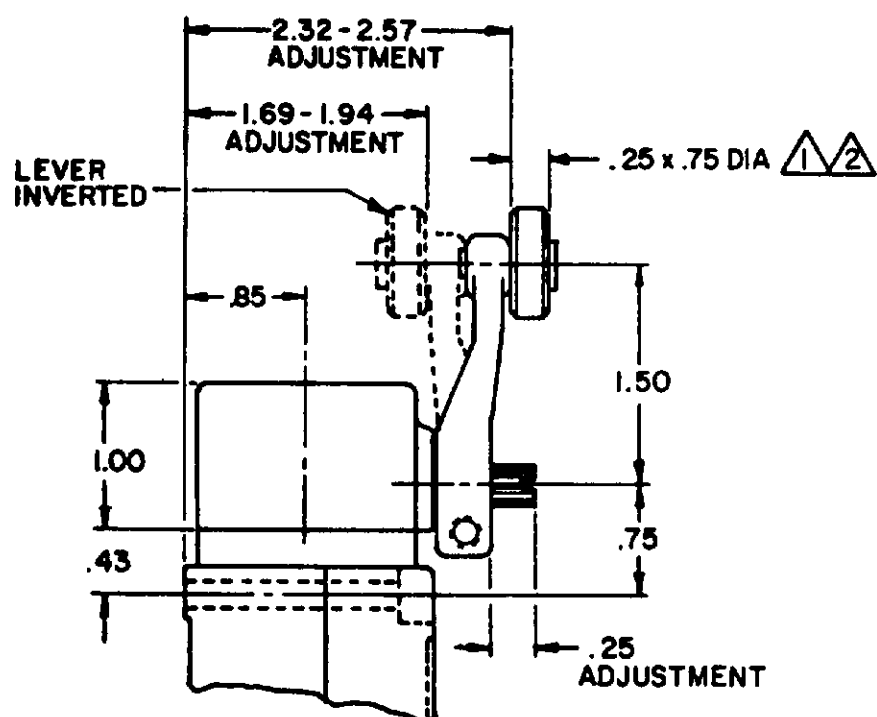

LSZ51 TYPE LEVERS

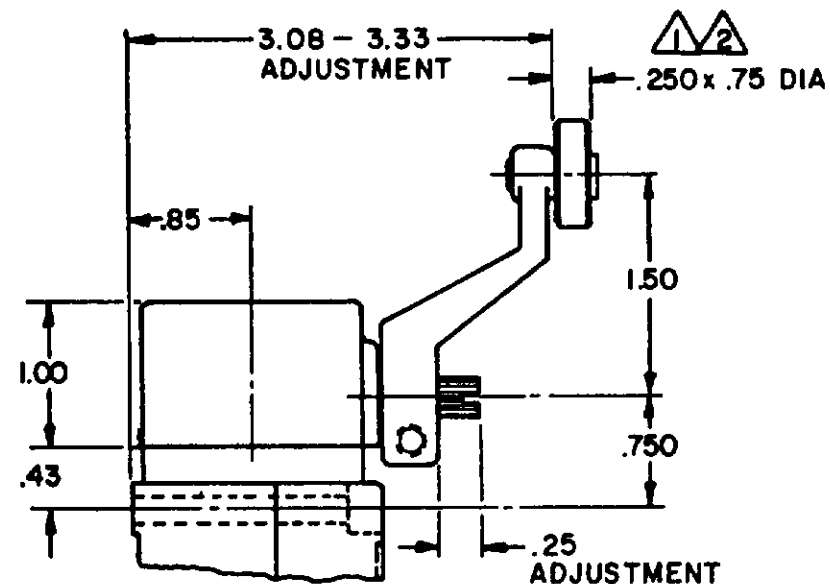
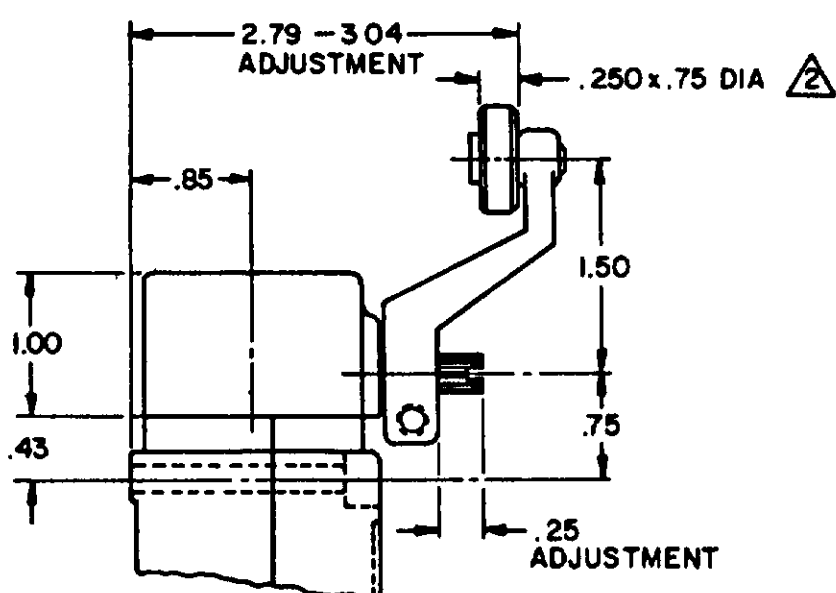


LSZ55 TYPE LEVERS

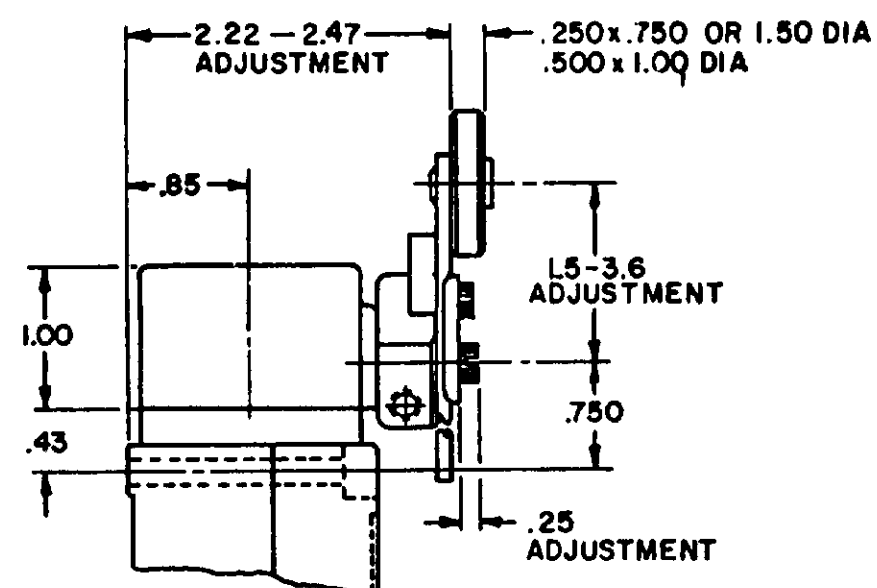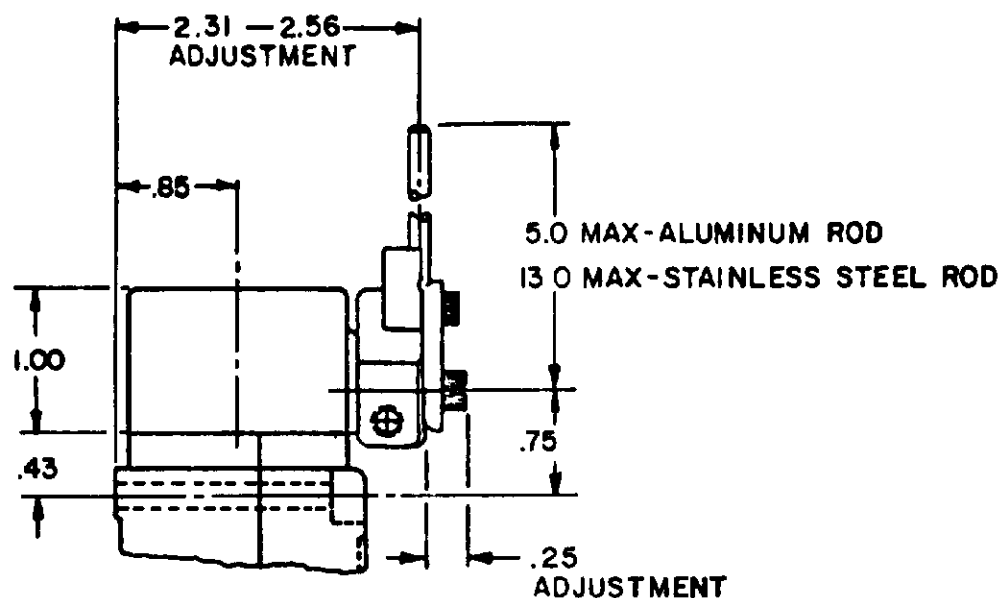

LSZ54 TYPE LEVER

LSZ52 TYPE LEVER

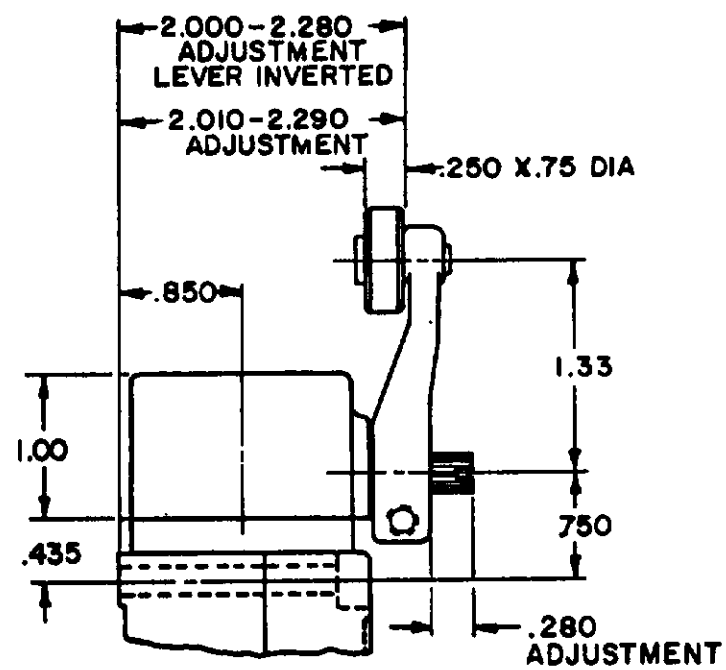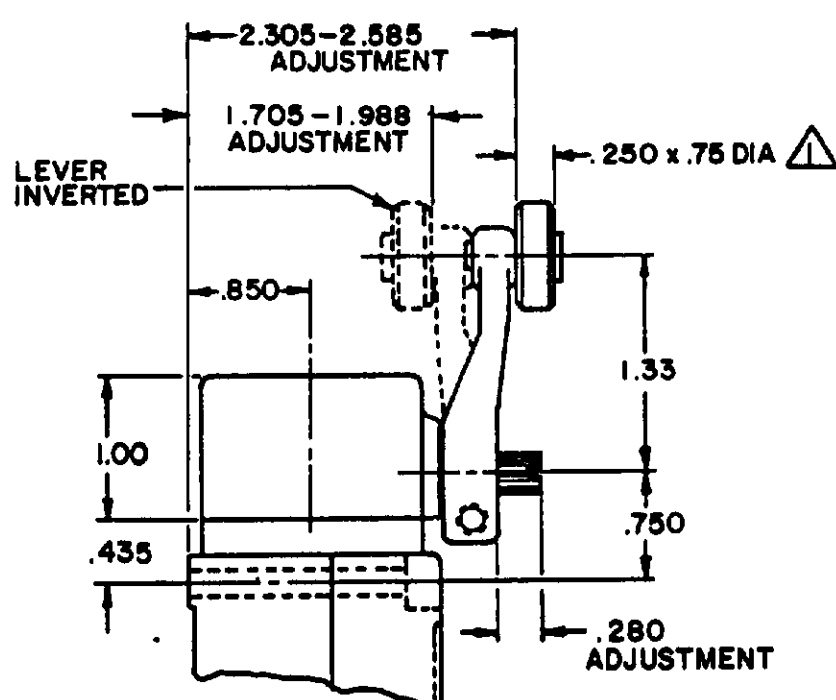

LSZ59 TYPE LEVERS

NOTES

- 1 - ALSO AVAILABLE IN .250 X 1.500 DIA NYLON, BUT LEVER CANNOT BE INVERTED
- 2 - FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO (M)
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 (M)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FEEDING CODE 31829

CHART 1

LSY SERIES

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015


THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT


TOP ROTARY

SINGLE POLE


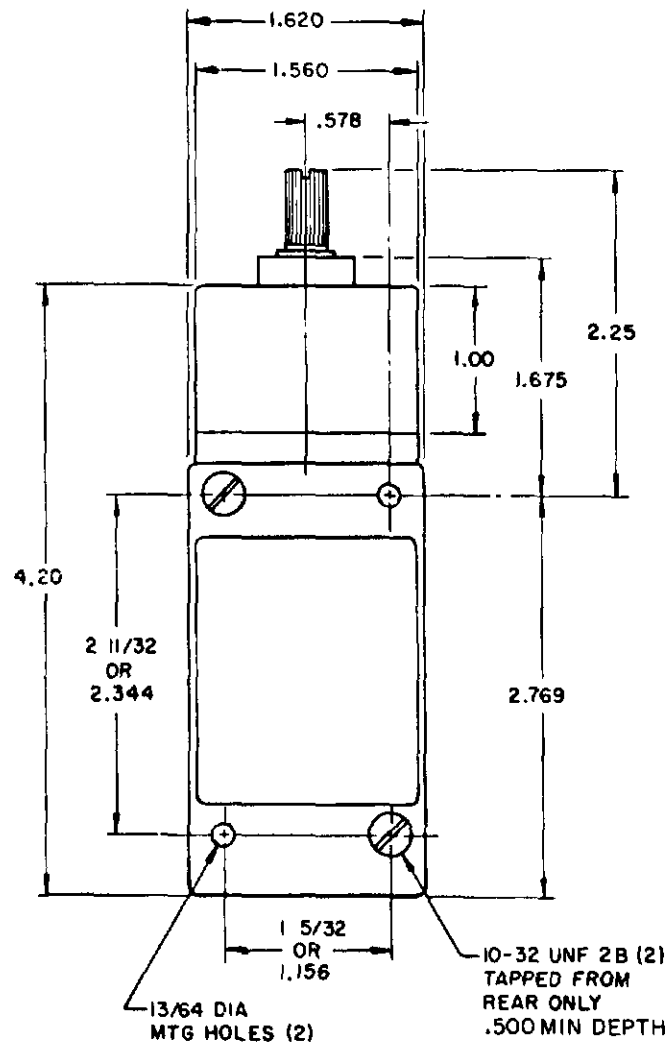


FLOUROSILICONE SEALS
LSYBB1 & LSYBB3

VITON SEALS
LSYBC1 & LSYBC3

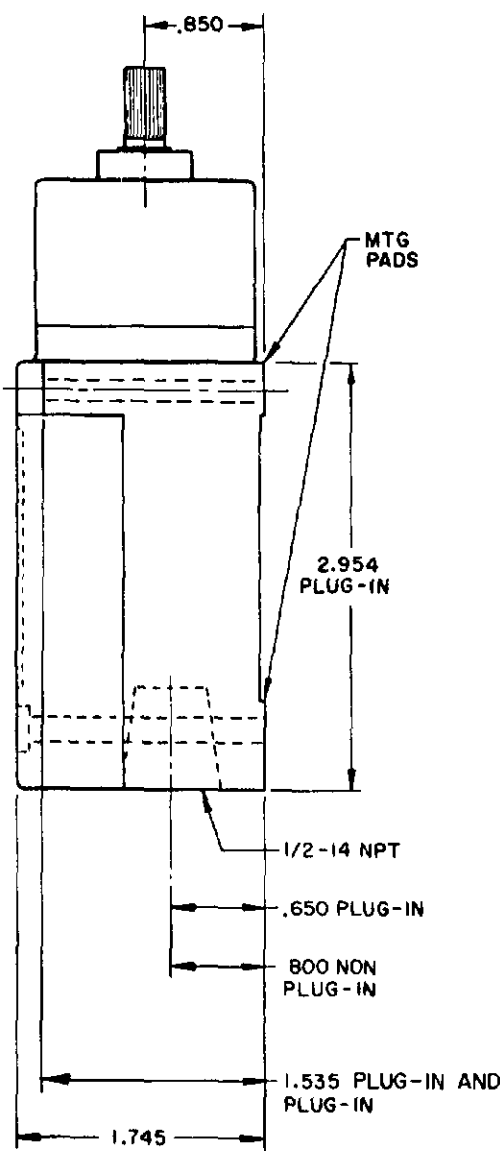

DOUBLE POLE

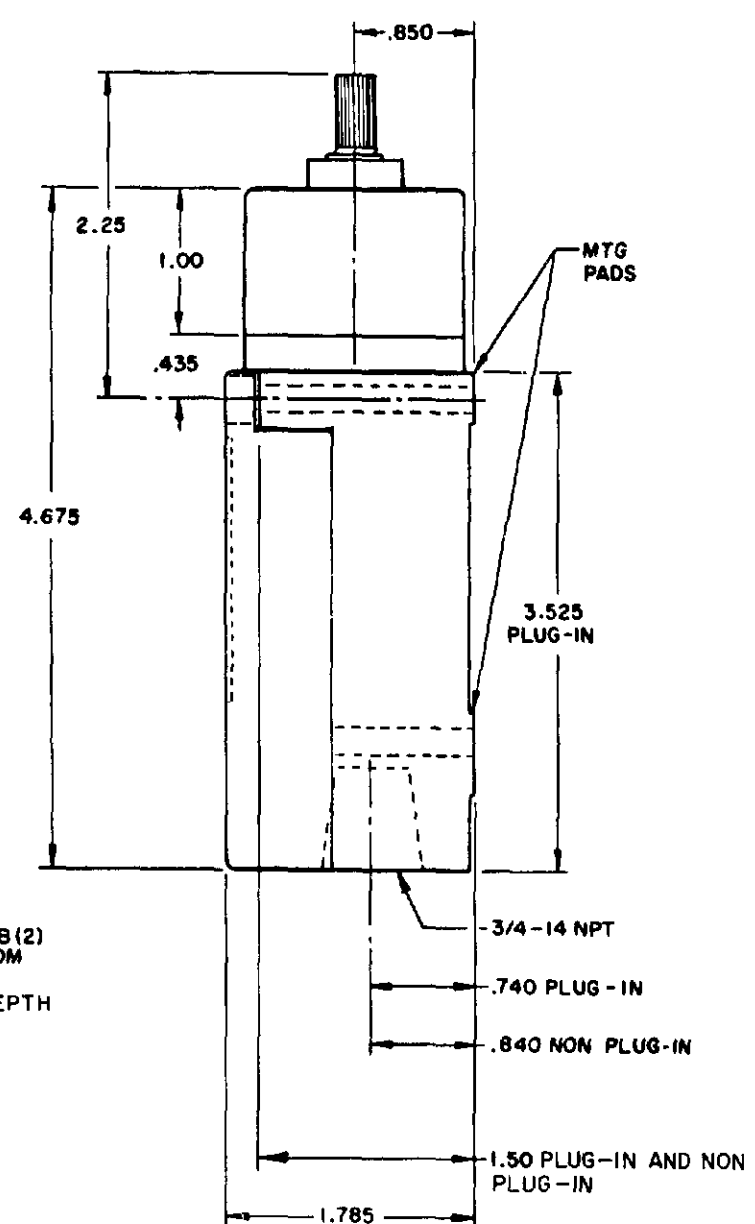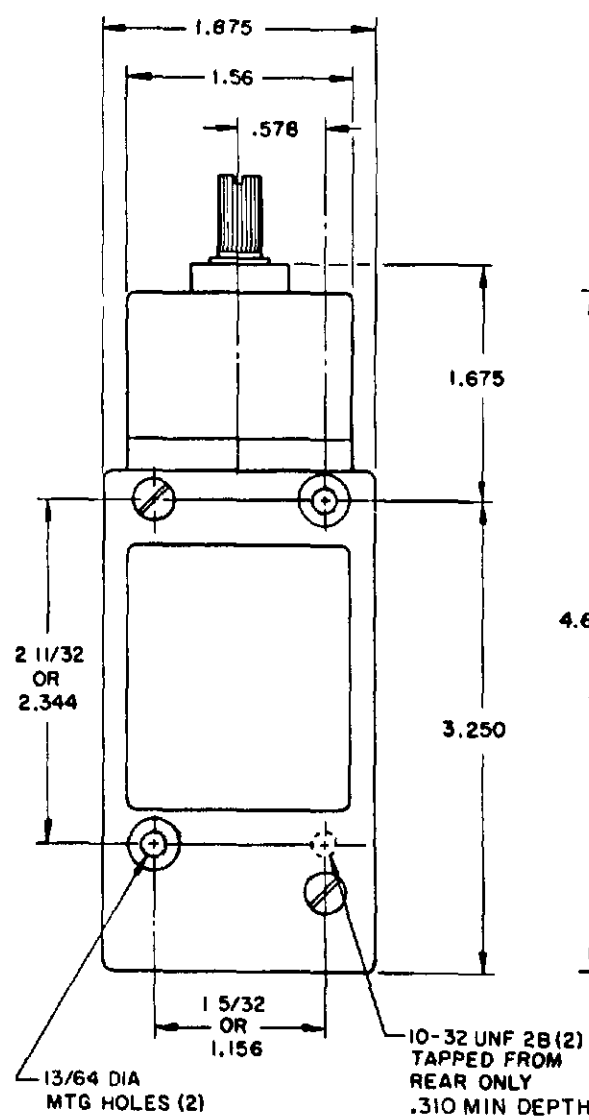

FLOUROSILICONE SEALS
LSYBB2 & LSYBB4
LSYBB6 & LSYBB7 HAVE 1/2-14NPT
CONDUIT HOLE

VITON SEALS
LSYBC2 & LSYBC4, LSYBC6 & LSYBC7
HAVE 1/2-14NPT CONDUIT HOLE

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2.5 IN. LBS	2.5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

10 AMP CONT.

A.C. VOLTAGE	AMPS AT .35 POWER FACTOR			
	SINGL. POL.		DOUBLE POL.	
	MAKE	BREAK	MAKE	BREAK
120	60	6	10	3
240	30	3	15	1.5
480	15	1.5	7.5	.75
600	12	1.2	6	.6


D.C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT.


VOLTAGE	
5 AC OR DC MIN	.01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

WIRING BASIC SWITCH (SAME POLARITY MUST BE OBSERVED FOR EACH POLE)

SINGLE POLE MOMENTARY


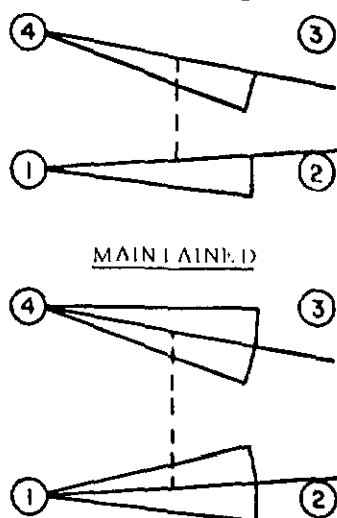


SINGLE POLE ELECTRONIC DUTY MOMENTARY

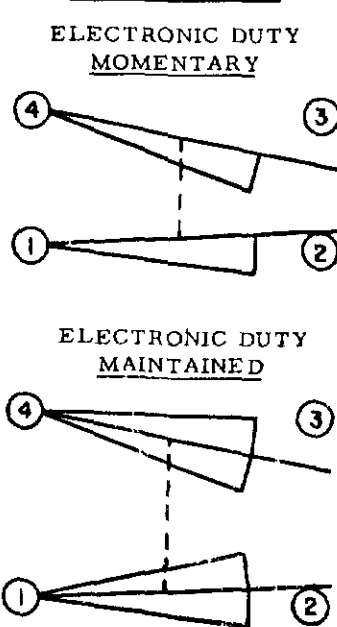

DIRECT ACTING

DOUBLE POLE MOMENTARY

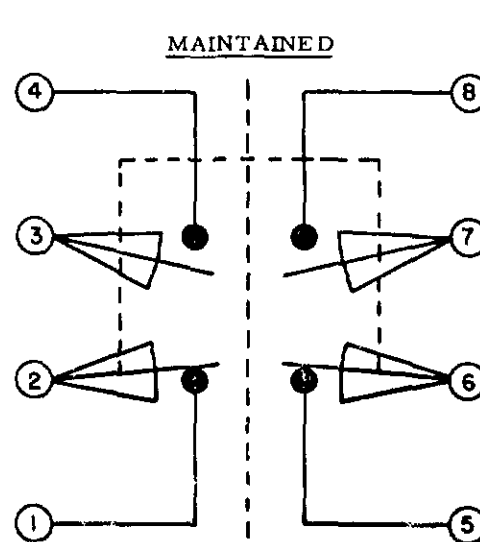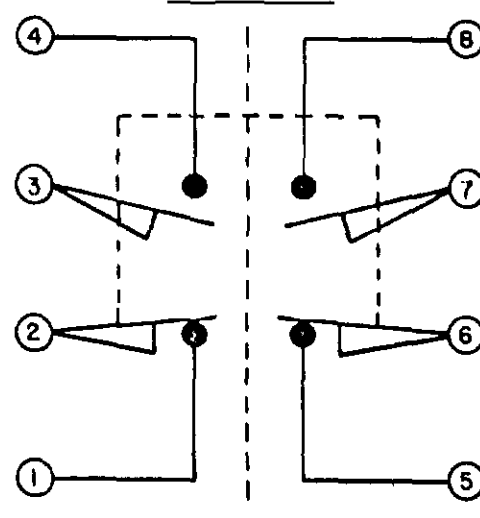

DIRECT ACTING (ALSO RATED AT A.C. 10
AMP CONT.)

D.C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

2 DIFFERENTIAL TRAVEL ON ALL
OPERATING CHARACTERISTICS NOT
APPLICABLE

MICRO SWITCH
FREEPORT, L.I., N.Y. U.S.A.
A DIVISION OF HONEYWELL
FED. REG. CODE 91918


SWITCH - ENCLOSED

LSY SERIES
CHART 1





SCALE NONE
DO NOT SCALE PRINT

PLUNGER TYPE TOP

SINGLE POLE

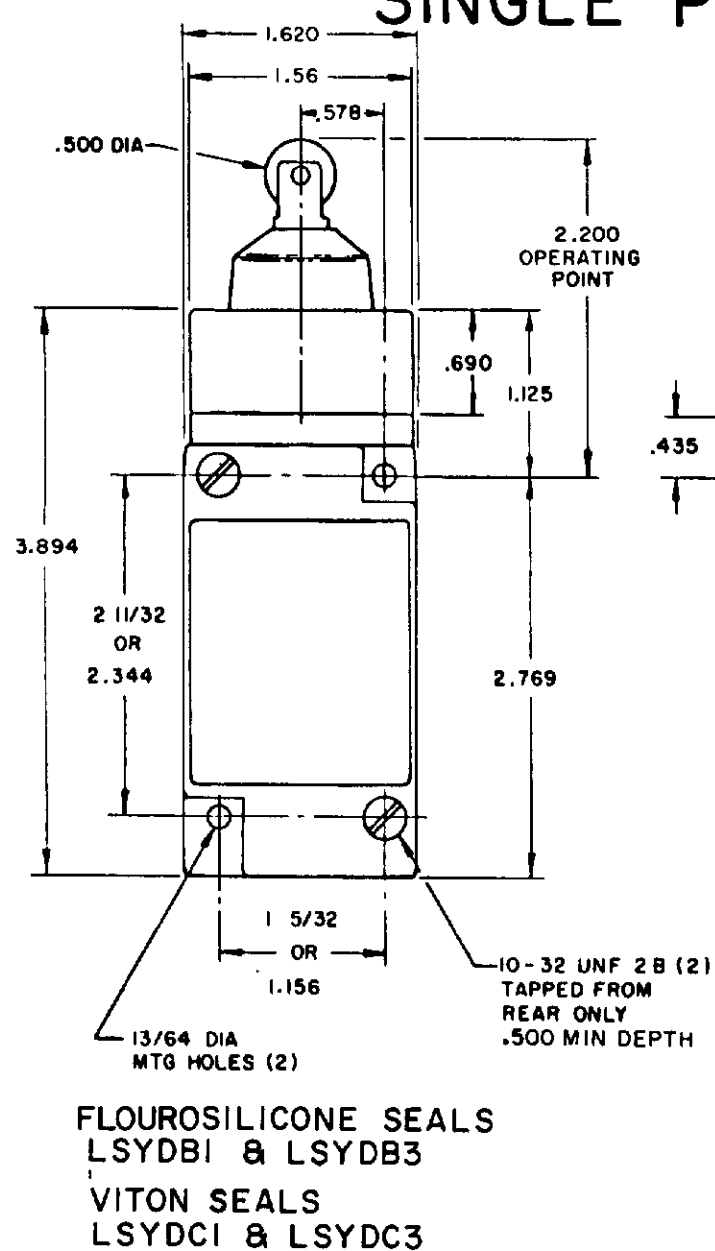


DOUBLE POLE

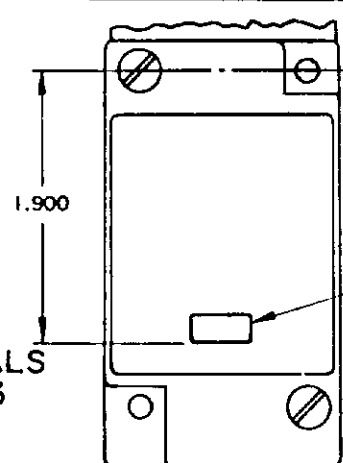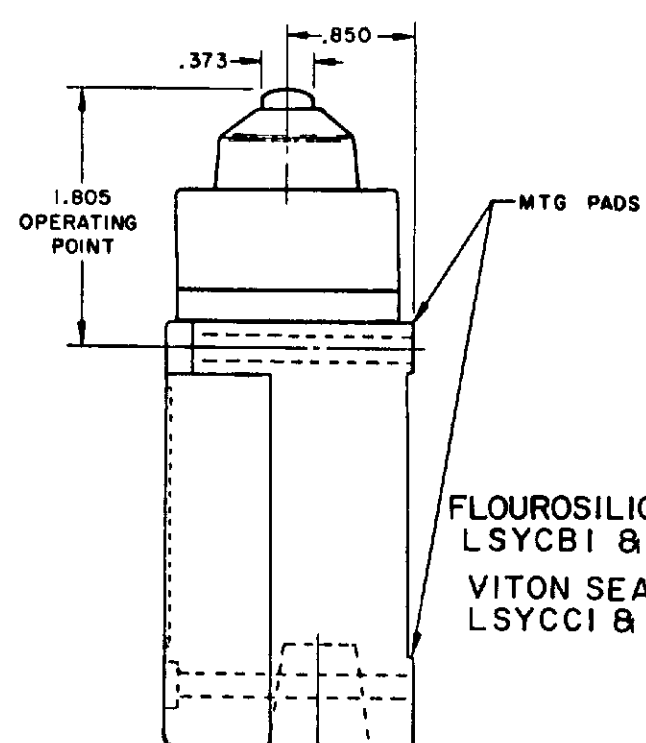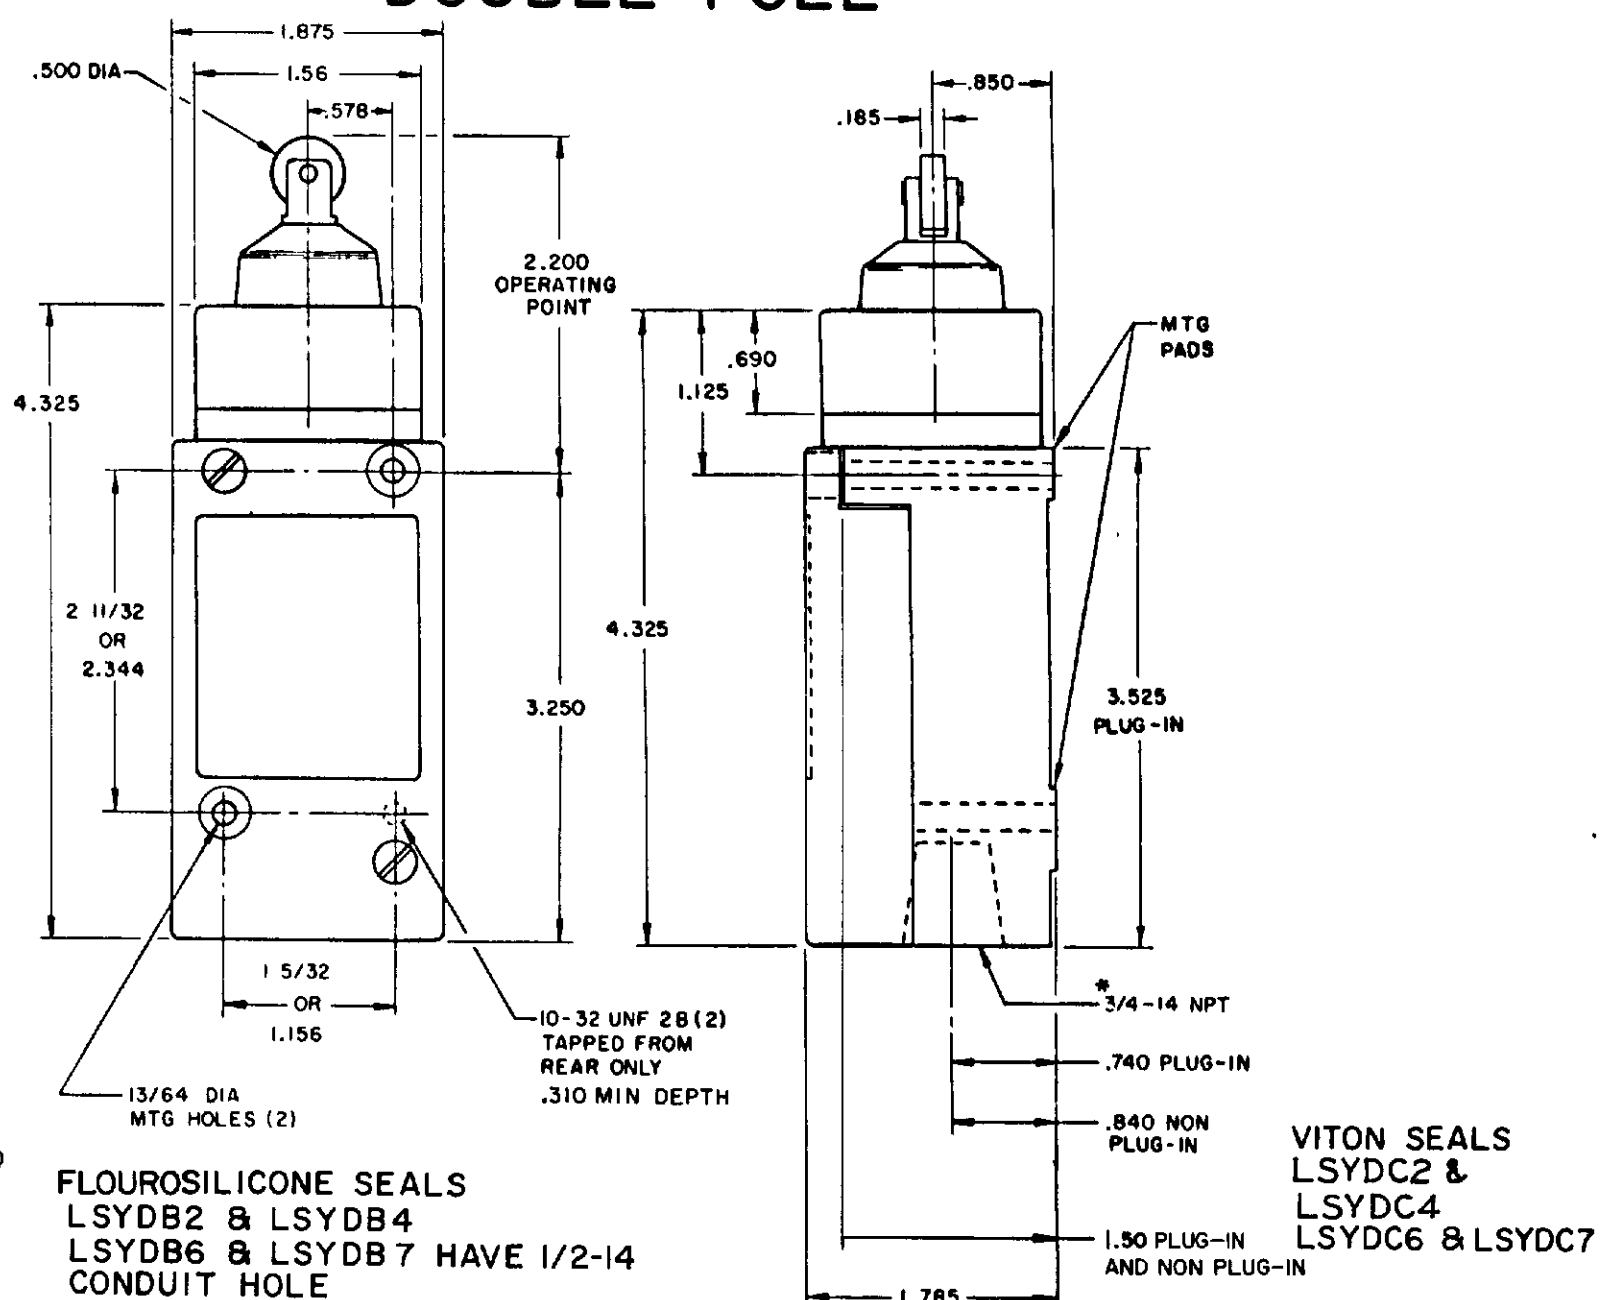


FLOUROSILICONE SEALS
LSYCB1 & LSYCB3
VITON SEALS
LSYCC1 & LSYCC3

120 LAMP VOLTAGE -
LSYCB 5, LSYDB5, LSYVB5
LSYCC 5, LSYDC5, LSYVC5
240 LAMP VOLTAGE -
LSYCB8, LSYDB8, LSYVB8
LSYCC8, LSYDC8, LSYVC8


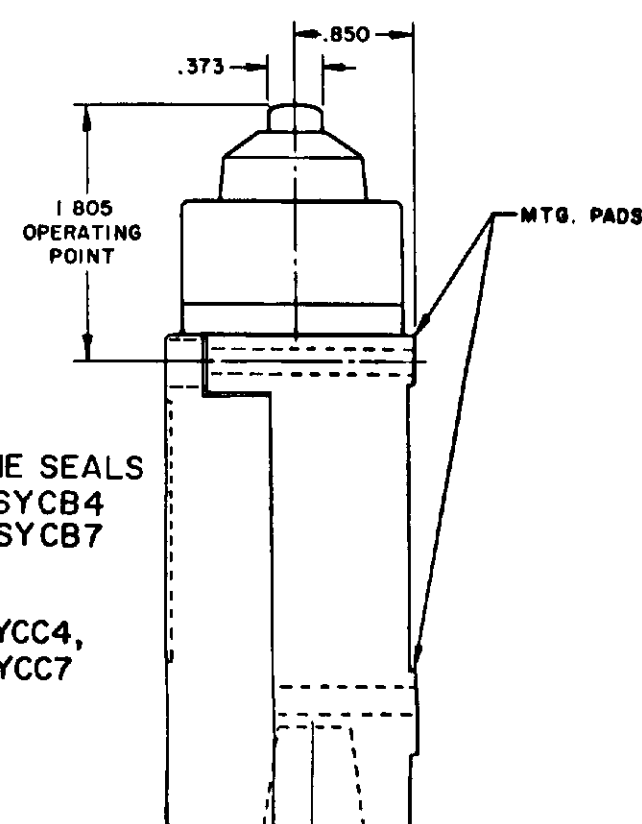


FLOUROSILICONE SEALS
LSYCB2 & LSYCB4
LSYCB6 & LSYCB7

VITON SEALS
LSYCC2 & LSYCC4,
LSYCC6 & LSYCC7

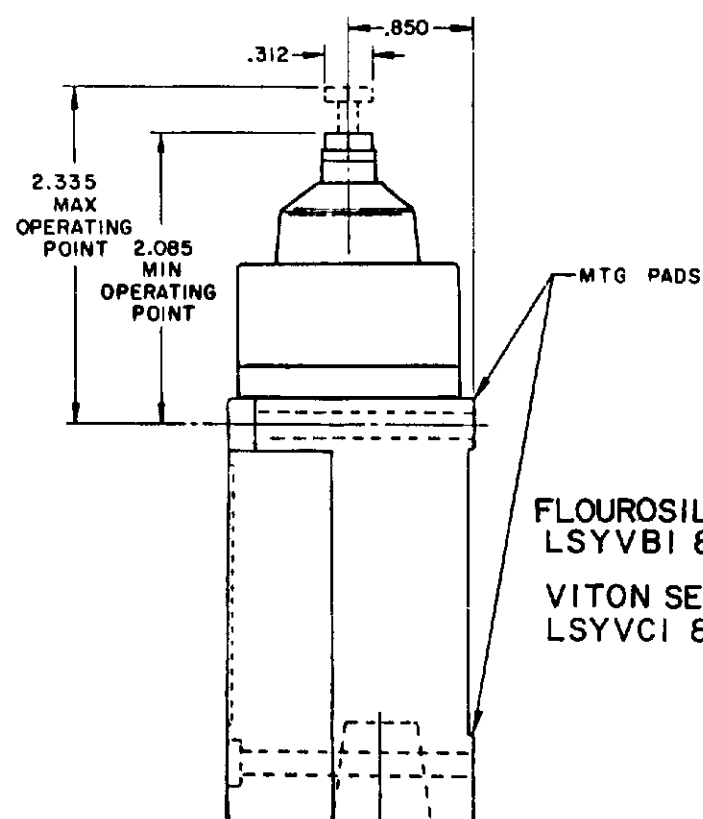


FLOUROSILICONE SEALS
LSYVBI & LSYVB3
VITON SEALS
LSYVCI & LSYVC3

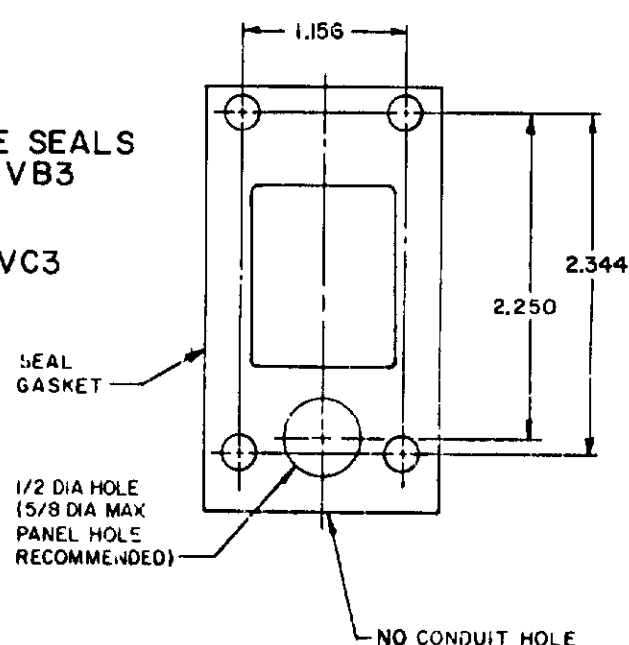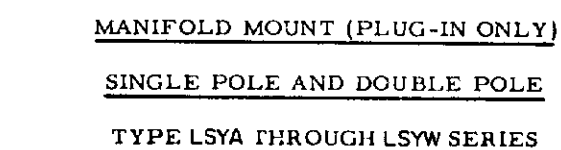

FLOUROSILICONE SEALS
LSYVB2 & LSYVB4,
LSYVB6 & LSYVB7

VITON SEALS
LSYVC2 & LSYVC4,
LSYVC6 & LSYVC7

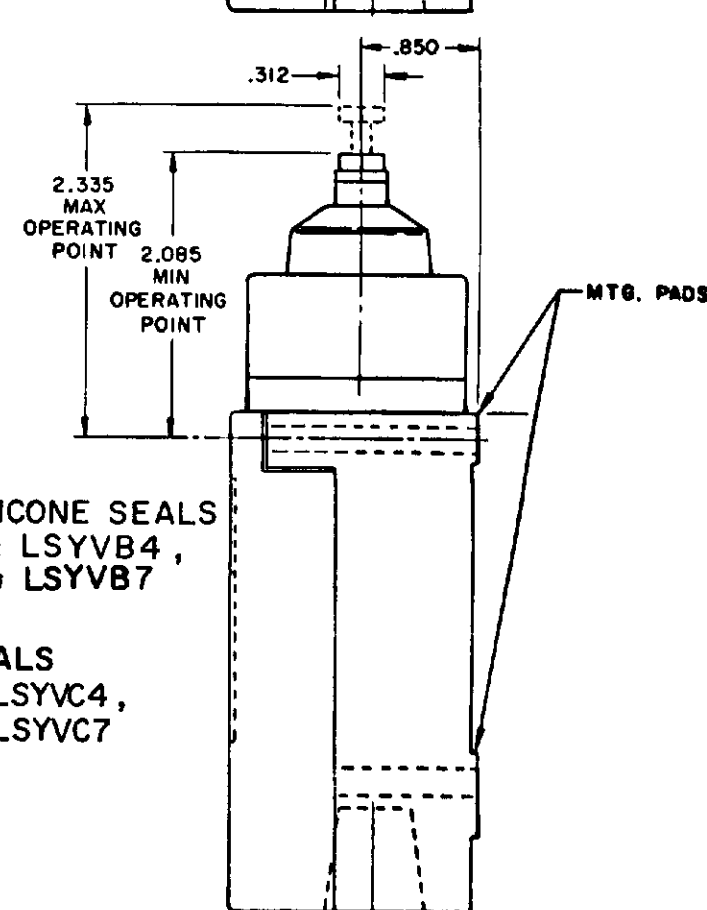

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

MICRO SWITCH
FREEDPORT INC., 2015 U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91020

SWITCH - ENCLOSED






LSY SERIES
CHART 1

M LSY SERIES CHART
PAGE 4 OF 10

SIDE PLUNGER TYPE




SINGLE POLE

DOUBLE POLE

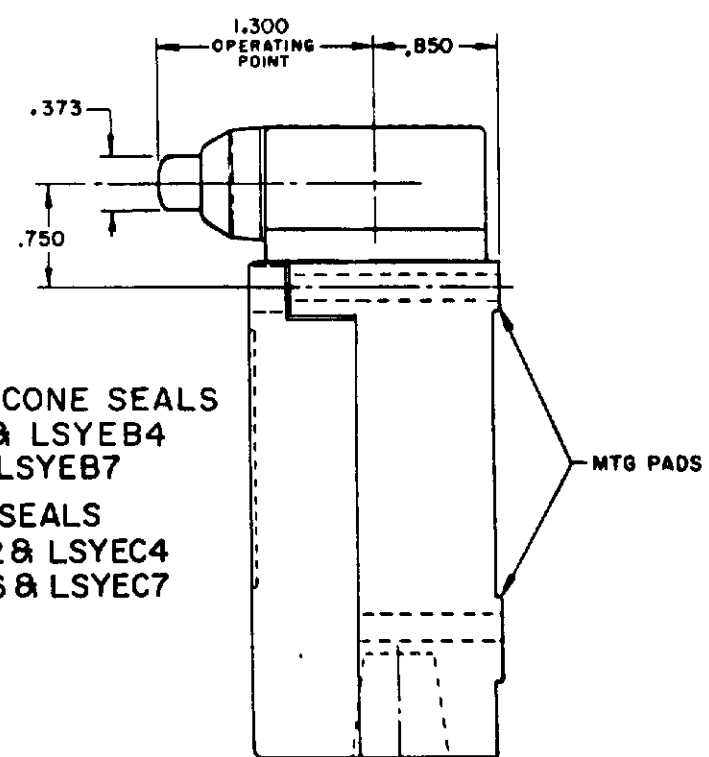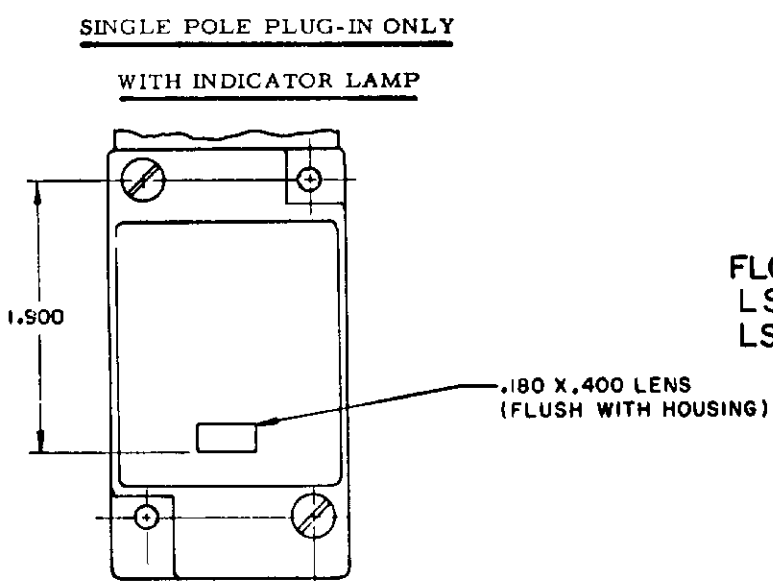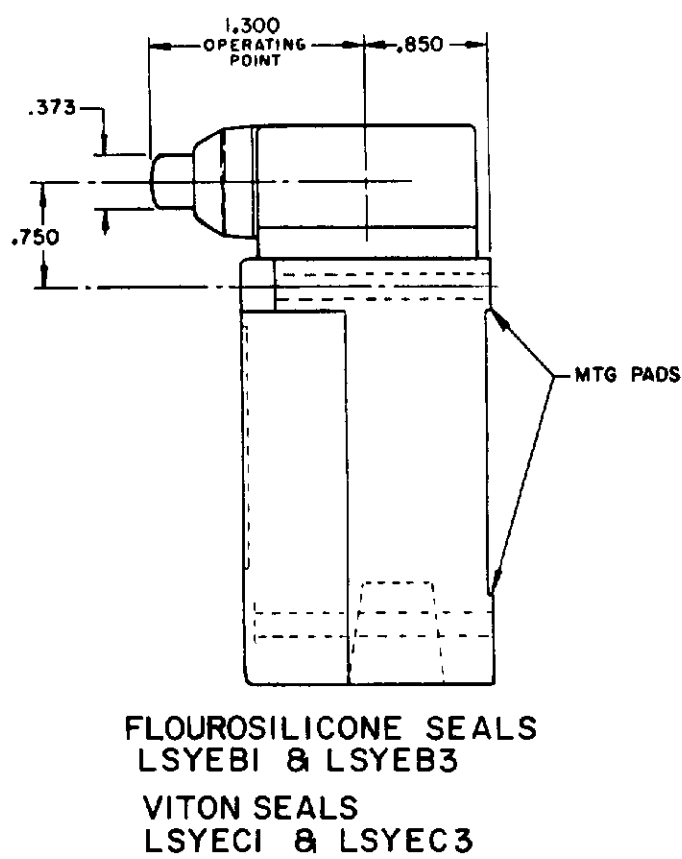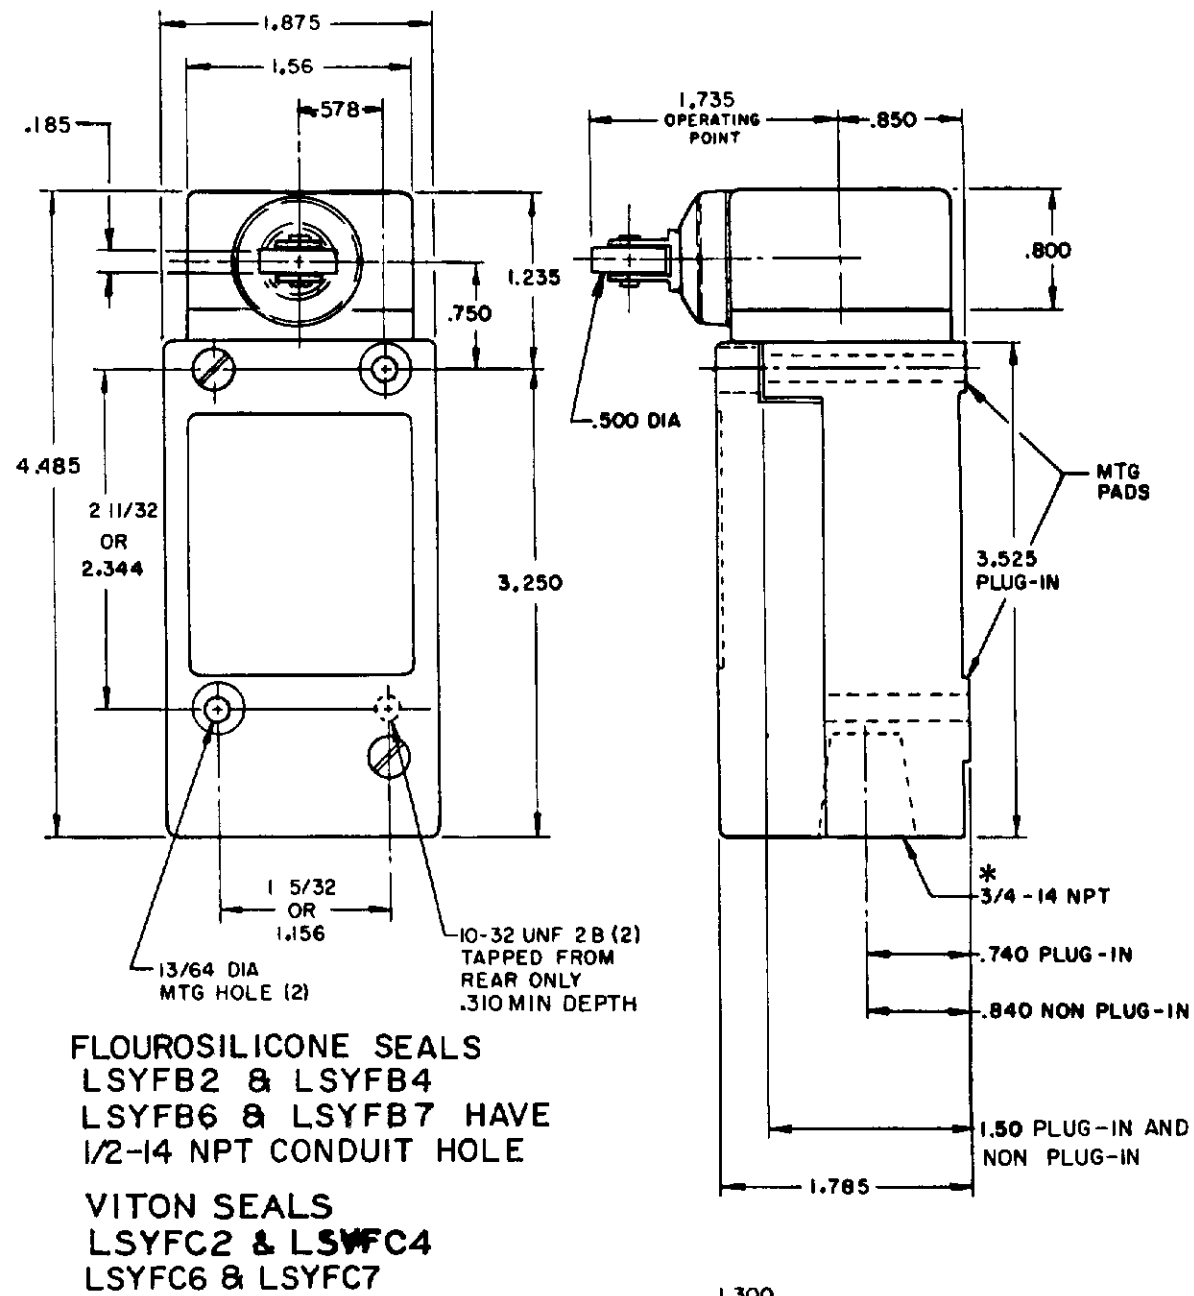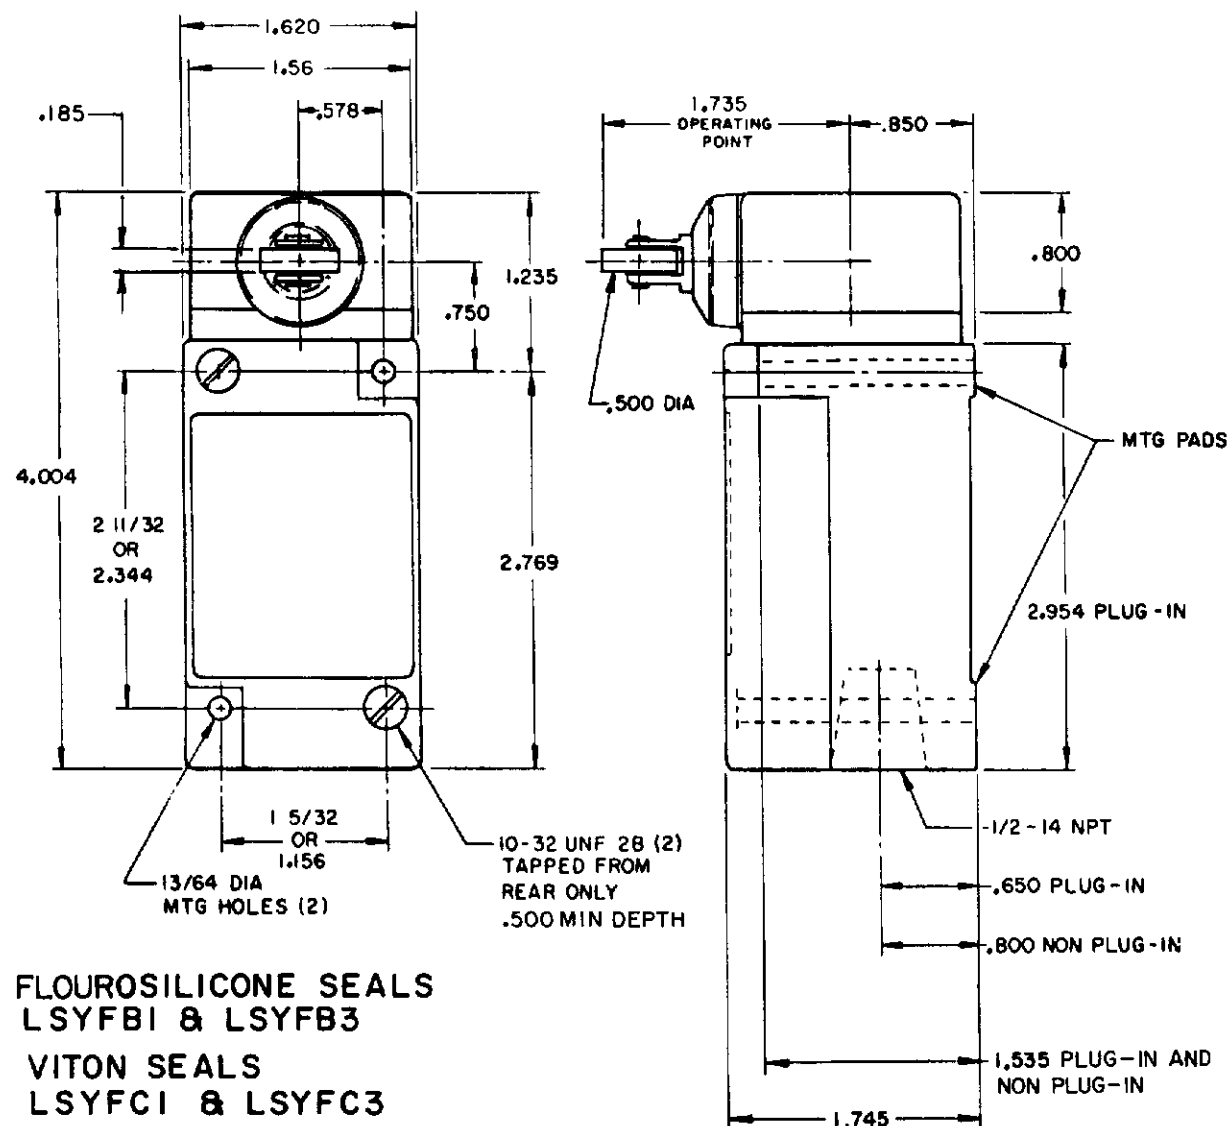

120 LAMP VOLTAGE -
LSYFB5, LSYEB5, LSYWB5
LSYFC5, LSYEC5, LSYWC5

240 LAMP VOLTAGE -
LSYFB8, LSYEB8, LSYWB8
LSYFC8, LSYEC8, LSYWC8

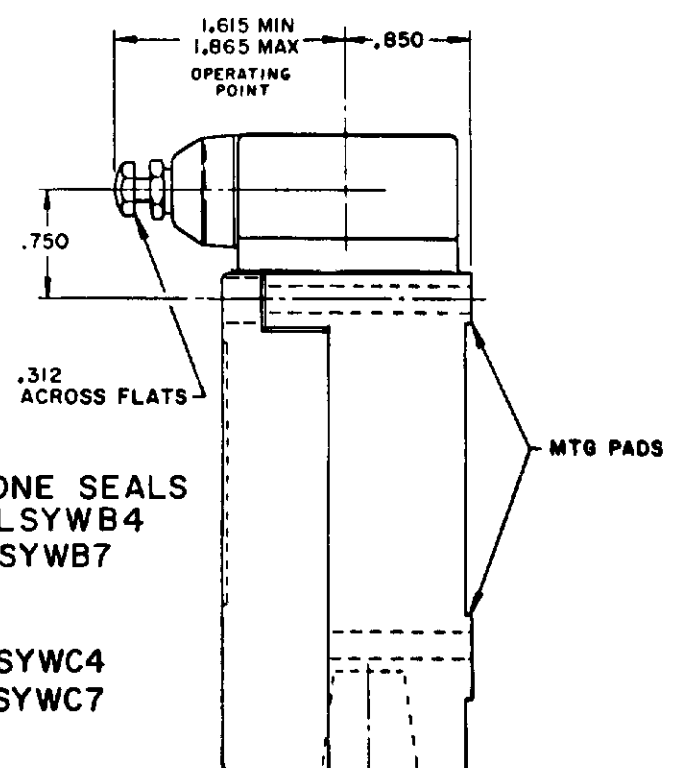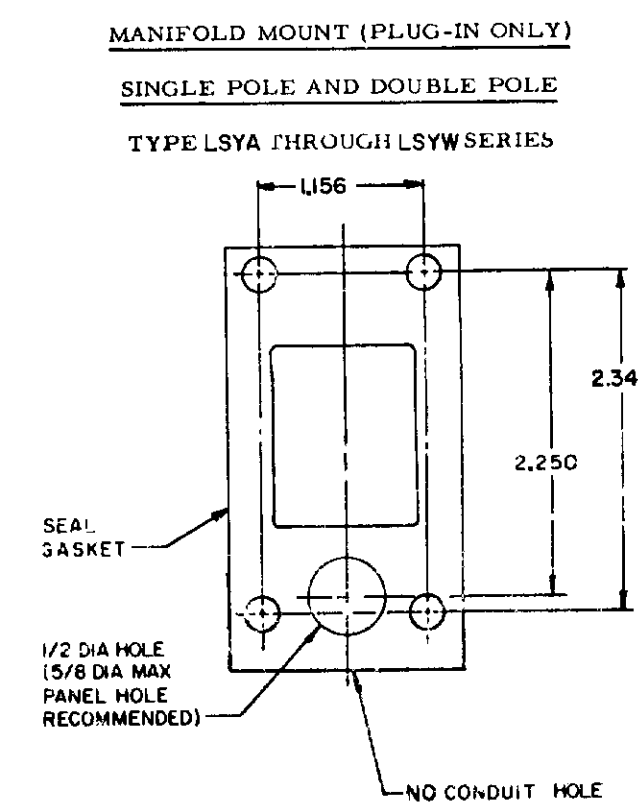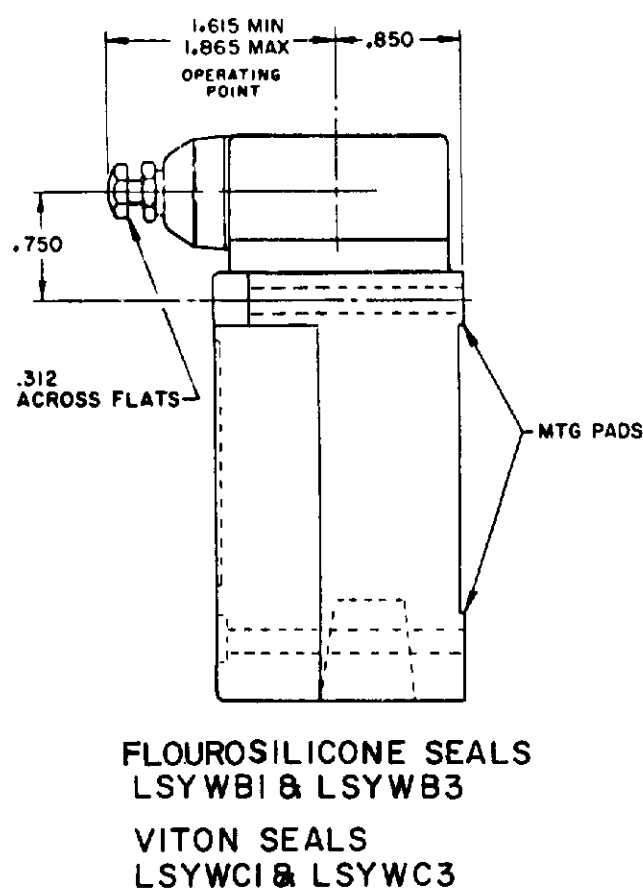


NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

MICRO SWITCH
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH, A DIVISION OF HONEYWELL.
FED. REG. CO. 9-438

SWITCH - ENCLOSED

LSY SERIES
CATALOG LISTING
CHART 1

SCALE NONE
DO NOT SCALE PRINT

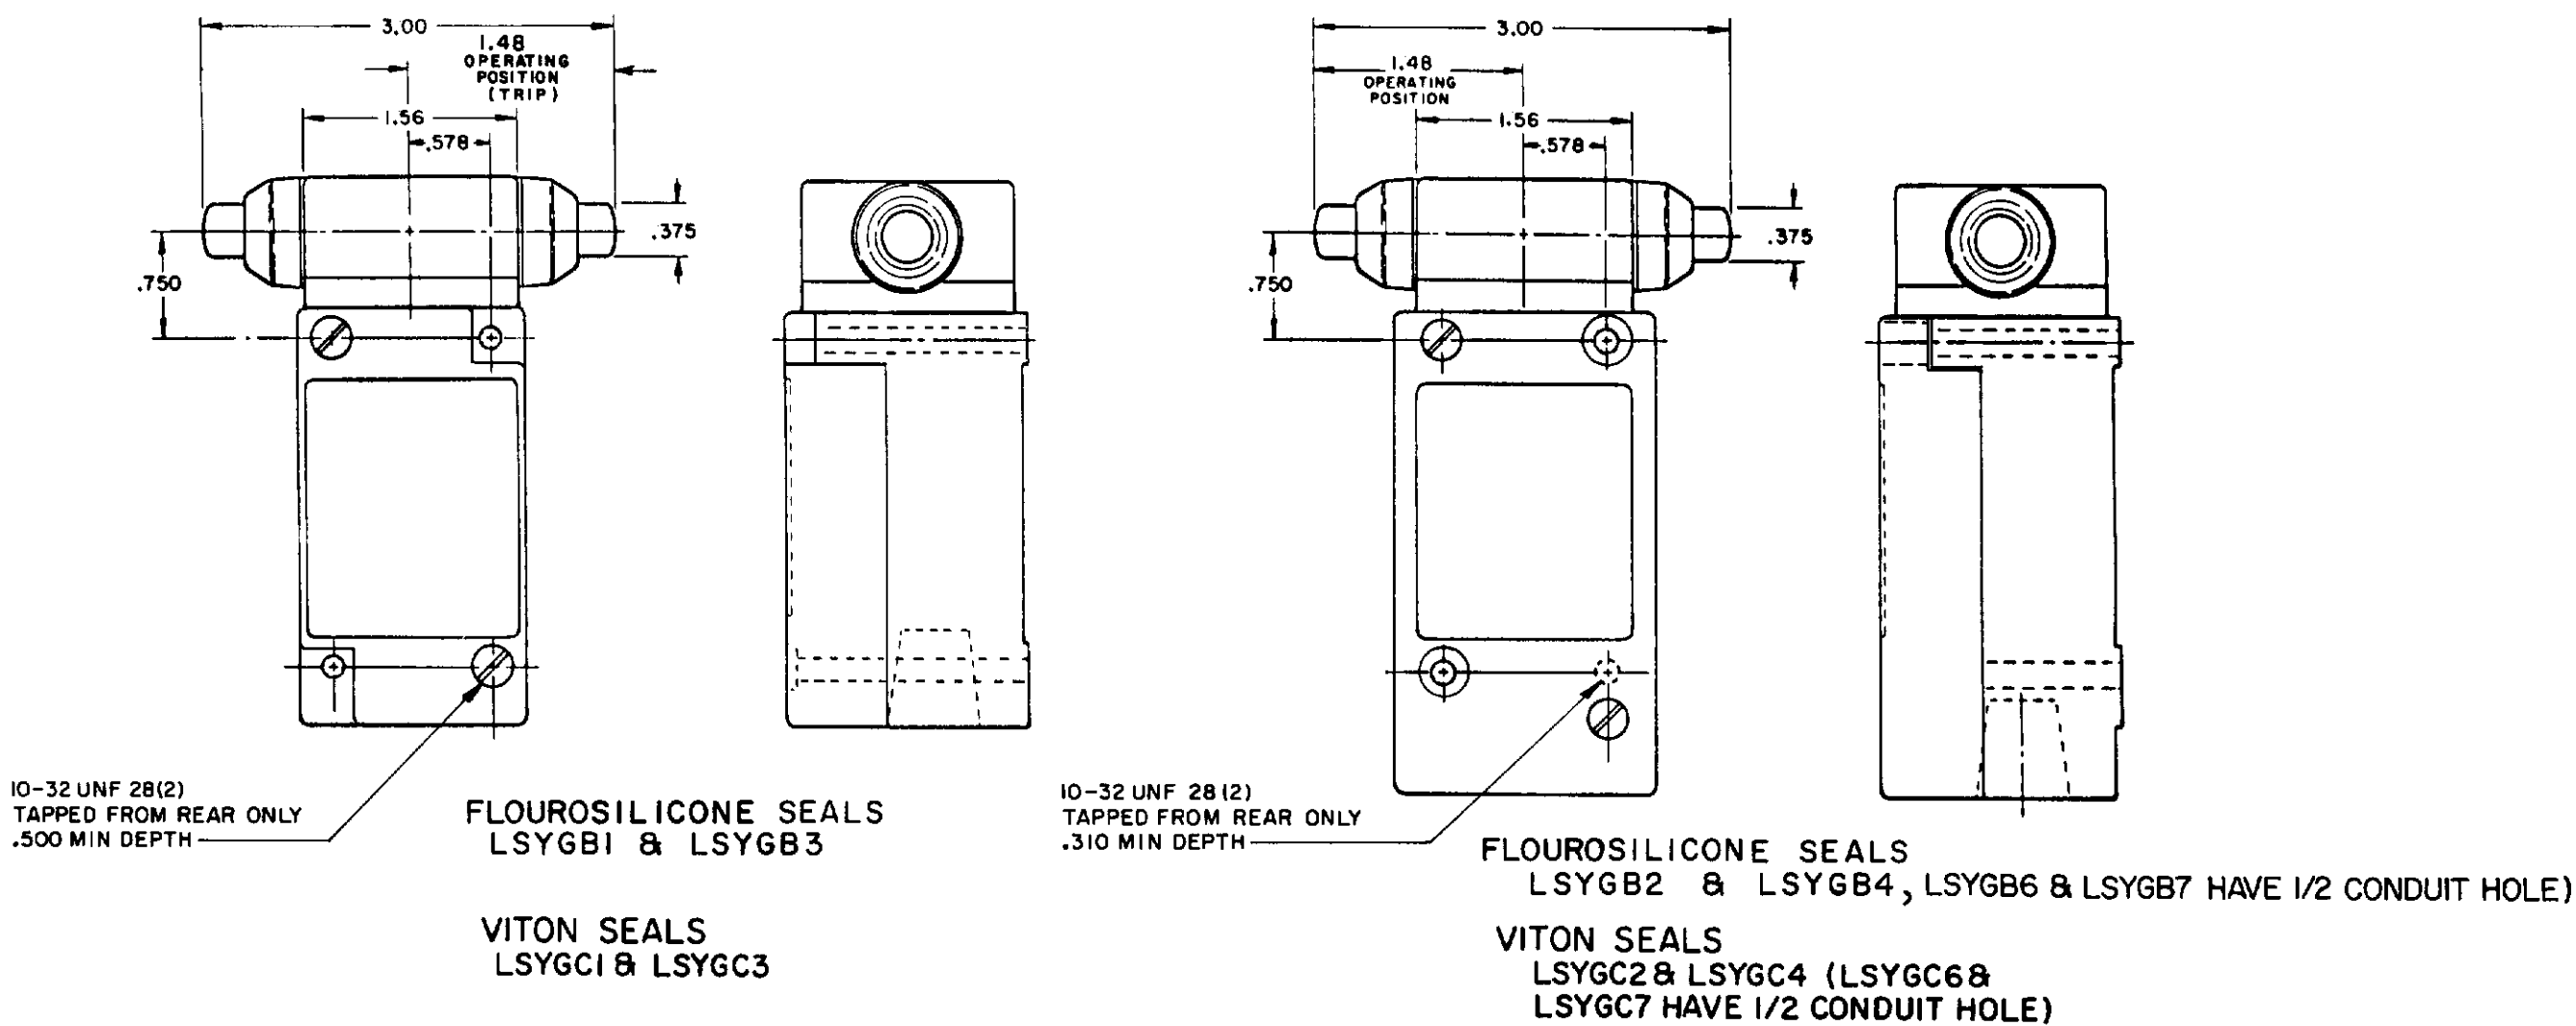


INITIAL POSITION (FREE POSITION) }
OPERATING POINT } PRETRAVEL
FULL TRAVEL } DIFFERENTIAL TRAVEL
OVERTRAVEL

OPERATING POINT GIVEN IN RELATION TO TOP MOUNTING HOLE										TOP PLUNGER TYPES		
CHARACTERISTICS	LSYC PLUNGER		LSYD ROLLER PLUNGER		LSYV ADJ PLUNGER		SEQUENCE BASIC					
							LSYC	LSYD	LSYV			
PRETRAVEL (MAX)	.070		.070		.070		1ST STEP .070 2ND STEP .016 MIN ADD'L					
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE .015	DOUBLE POLE .020	SINGLE POLE .015	DOUBLE POLE .020	SINGLE POLE .015	DOUBLE POLE .020	.015 EACH STEP					
OVERTRAVEL (MIN)	.190		.190		.190		.170					
OPERATING FORCE (MAX)	4 LBS		4 LBS		4 LBS		4 LBS					
OPERATING POINT	1.805 ± .030		2.200 ± .040		2.085 MIN 2.335 MAX		1ST STEP 1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX					
FULL OVERTRAVEL FORCE (MAX)	7 LBS		7 LBS		7 LBS		7 LBS					
OPERATING POINT GIVEN IN RELATION TO CENTER OF HEAD										SIDE PLUNGER TYPES		
CHARACTERISTICS	LSYE PLUNGER	LSYF ROLLER PLUNGER	LSYW ADJ PLUNGER	LSYG PLUNGER MAINTAINED	SEQUENCE BASIC							
					LSYE	LSYF	LSYW					
PRETRAVEL (MAX)	.100	.100	.100	.170	1ST STEP .100 2ND STEP .020 MIN ADD'L							
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.045	.090	.025 EACH STEP							
OVERTRAVEL (MIN)	.190	.190	.190	.080	.170							
OPERATING FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	6 LBS							
OPERATING POINT	1.300 ± .030	1.735 ± .040	1.615 MIN 1.865 MAX	1.480 ± .030	1ST STEP 1.310±.030 1.745±.040 1.625 MIN / 1.875 MAX							
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	6 LBS							

WOBBLE STICK

SINGLE POLE


DOUBLE POLE

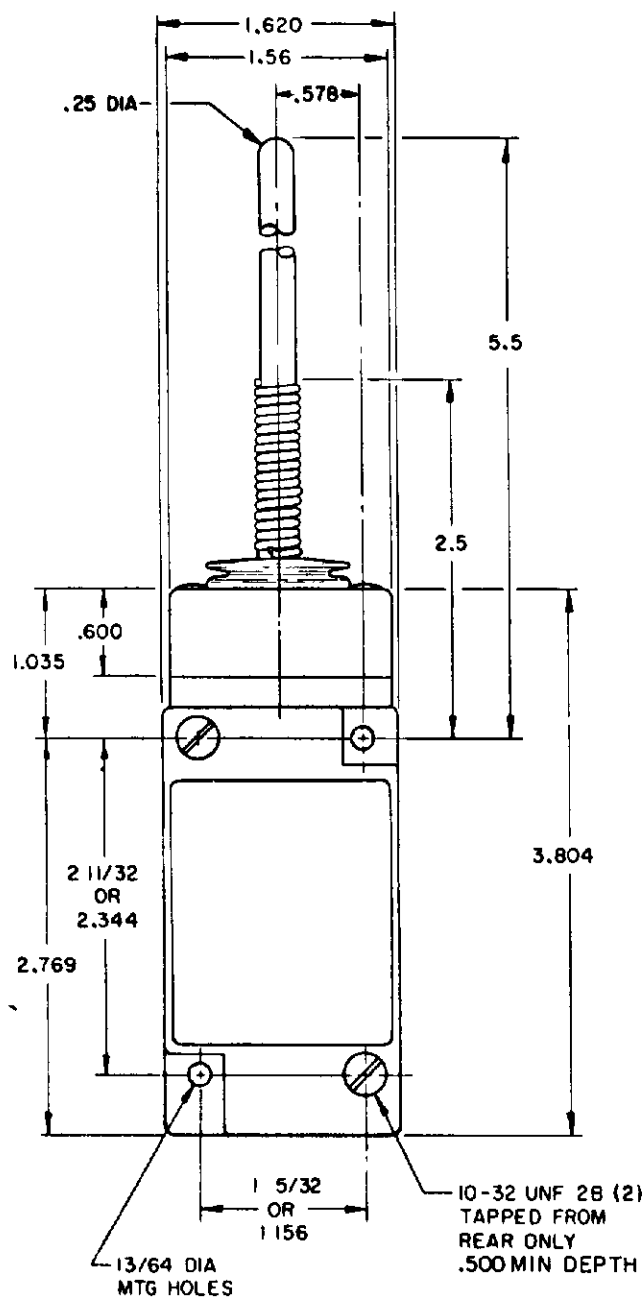


**PLASTIC EXTENSION
TYPE 7A ACTUATOR**



**REPLACEMENT ACTUATOR
LSZ 4009**

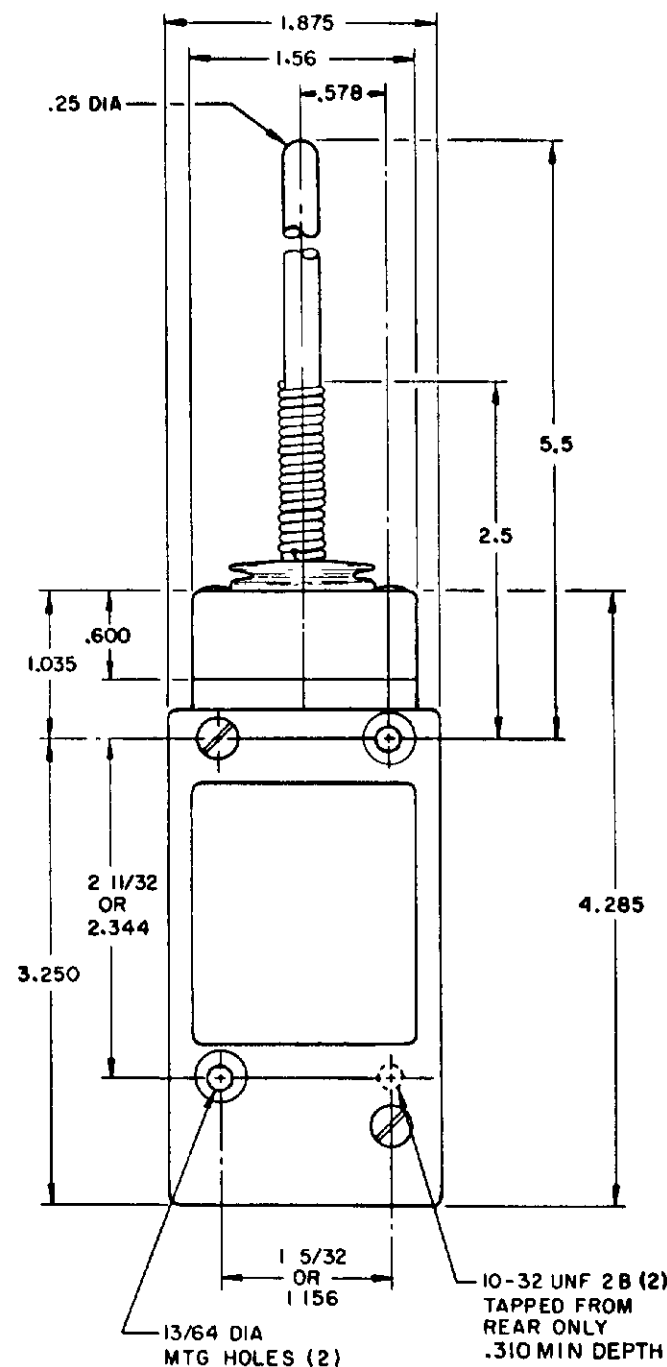


**PLASTIC EXTENSION
TYPE 7A ACTUATOR**

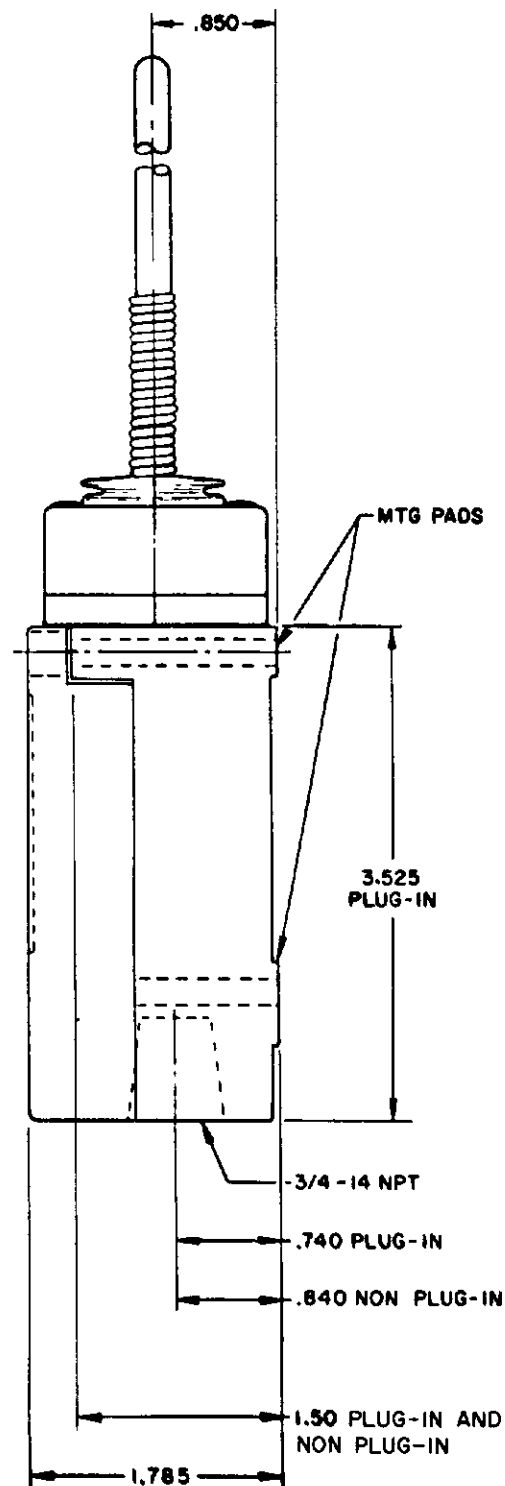

**REPLACEMENT ACTUATOR
LSZ 4011**




**CABLE EXTENSION
TYPE 7N ACTUATOR**

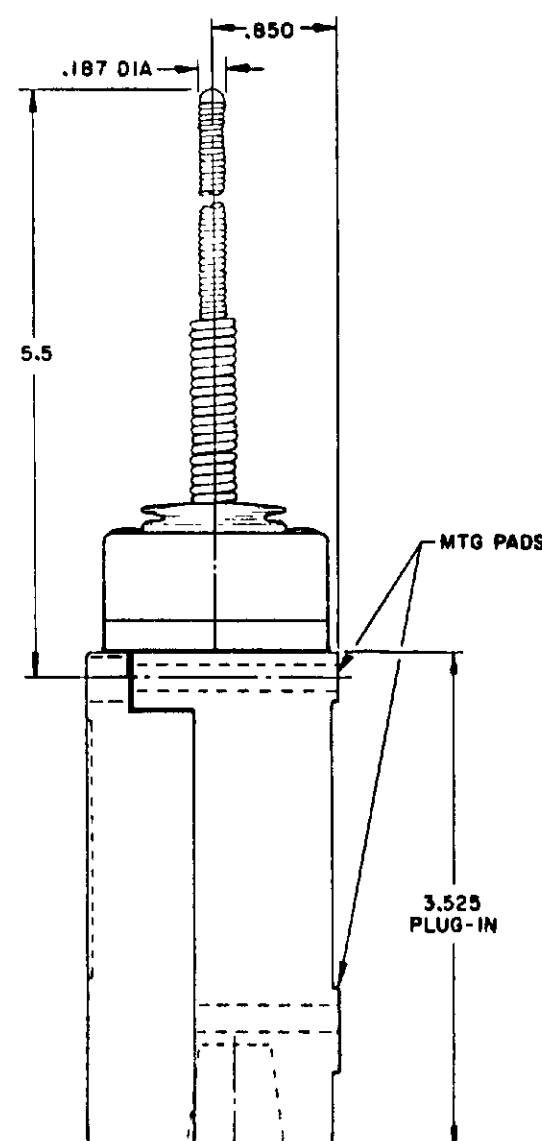

**CABLE EXTENSION
TYPE 7N ACTUATOR**

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSYA THROUGH LSYW SERIES

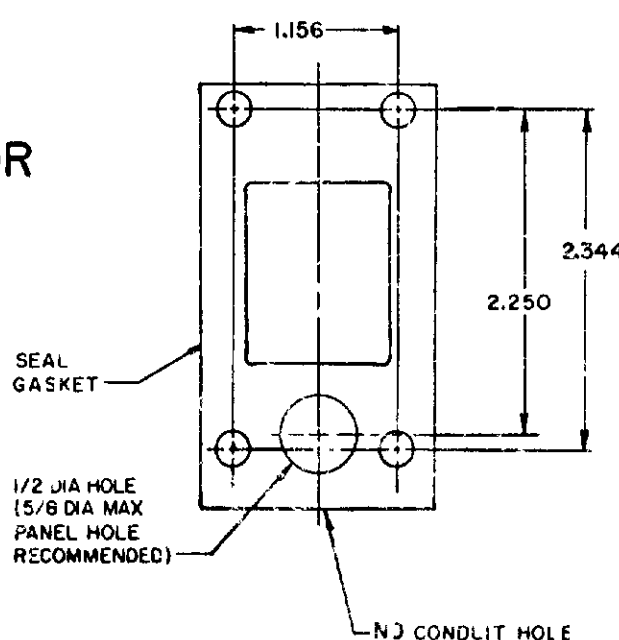

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL

SWITCH-ENCLOSED

CHART 1

LSY SERIES

SCALE NONE
DO NOT SCALE PRINT

Technical drawing of a mechanical assembly (Fig. 1). The drawing shows a vertical shaft with a diameter of .850. A spring is mounted on the shaft, with a height of 2.63. The total height of the assembly is 13.0. The base of the assembly is labeled "MTG PADS".

1.900

180 X 400 LENS
(FLUSH WITH HOUSING)

120 LAMP VOLTAGE TYPE-LSYJB5 & LSYJC5
240 LAMP VOLTAGE TYPE-LSYJB8 & LSYJC8

FLOUROSILICONE SEALS
LSYJBI & LSYJB3

VITON SEALS
LSYJC1 & LSYJC3

CAT WHISKER

A cross-sectional diagram of a mechanical assembly. The diagram shows a central vertical shaft with a diameter of .850. A spring is located on the shaft, with a distance of 2.56 from the bottom of the shaft to the top of the spring. The top of the shaft is labeled .047 DIA. The assembly is sealed with two types of seals: FLOUROSILICONE SEALS (LSYKBI & LSYKB3) and VITON SEALS (LSYKCI & LSYKC3). The VITON SEALS are shown as two distinct layers. The assembly is supported by MTG PADS. A dimension line on the left indicates a distance of 2.56 from the bottom of the shaft to the top of the spring. A dimension line at the top indicates a diameter of .850. A dimension line on the right indicates a diameter of .047 DIA. A dimension line on the left indicates a distance of 2.56 from the bottom of the shaft to the top of the spring. A dimension line on the left indicates a distance of 2.56 from the bottom of the shaft to the top of the spring. A dimension line on the left indicates a distance of 2.56 from the bottom of the shaft to the top of the spring.

WIRE EXTENSION

*TYPE 8A ACTUATOR 5.5 IN.
TYPE 8B ACTUATOR 7.5 IN.
TYPE 8C COIL ACTUATOR 5.5 IN

Technical drawing of a seal assembly. The drawing shows a cross-section of a cylindrical component with a central threaded rod. The rod has a diameter of .047 DIA. The total height of the assembly is 2.56. The distance from the top of the assembly to the top of the threaded rod is .850. The distance from the top of the assembly to the top of the seal is marked with an asterisk (*). The seal is labeled MTG PADS. The drawing also shows a seal with a central hole, labeled SEALS YKB4 YKB7 NPT LE.

WIRE EXTENSION REPLACEMENTS

*TYPE 8A ACTUATOR 5.5 IN. - LSZ 4012
TYPE 8B ACTUATOR 7.5 IN. - LSZ 4013
TYPE 8C ACTUATOR 5.5 IN. - LSZ 4014

NOTE-
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

	CAT WHISKER			WOBBLE STICK		
PRETRAVEL (APPROX) IN. RADIUS	5 1/2" WIRE	5 1/2" WIRE	7 1/2" WIRE	ROD	CABLE	WIRE
	2	2	4.5	1.0	1.5	4.0
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	10.0	7.0	5.0

MICRO SWITCH
FREERPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED REG CODE 91919

SWITCH-ENCLOSED


CHART 1

LSY SERIES

SCALE NONE
DO NOT SCALE PRINT


CONVERSION BASES

SINGLE POLE (SIDE ROTARY) LSZ 4003

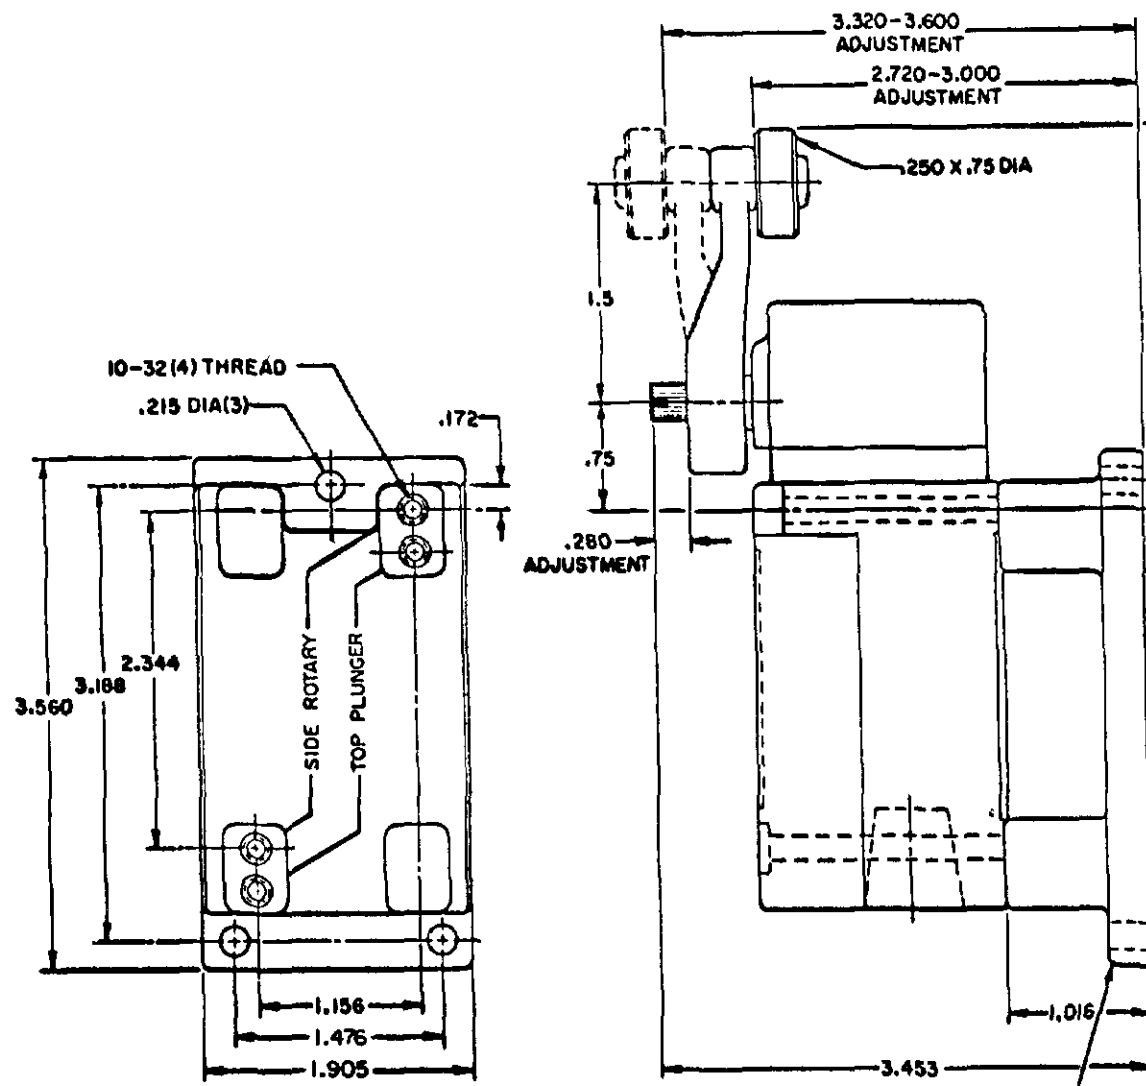




LSZ4003 CONVERSION BASE, WHEN USED WITH HEAVY DUTY LS WILL GIVE SAME TRACKING AS 201LS TYPE (LIMIT SWITCH NOT INCLUDED)

DOUBLE POLE (SIDE ROTARY) LSZ4004

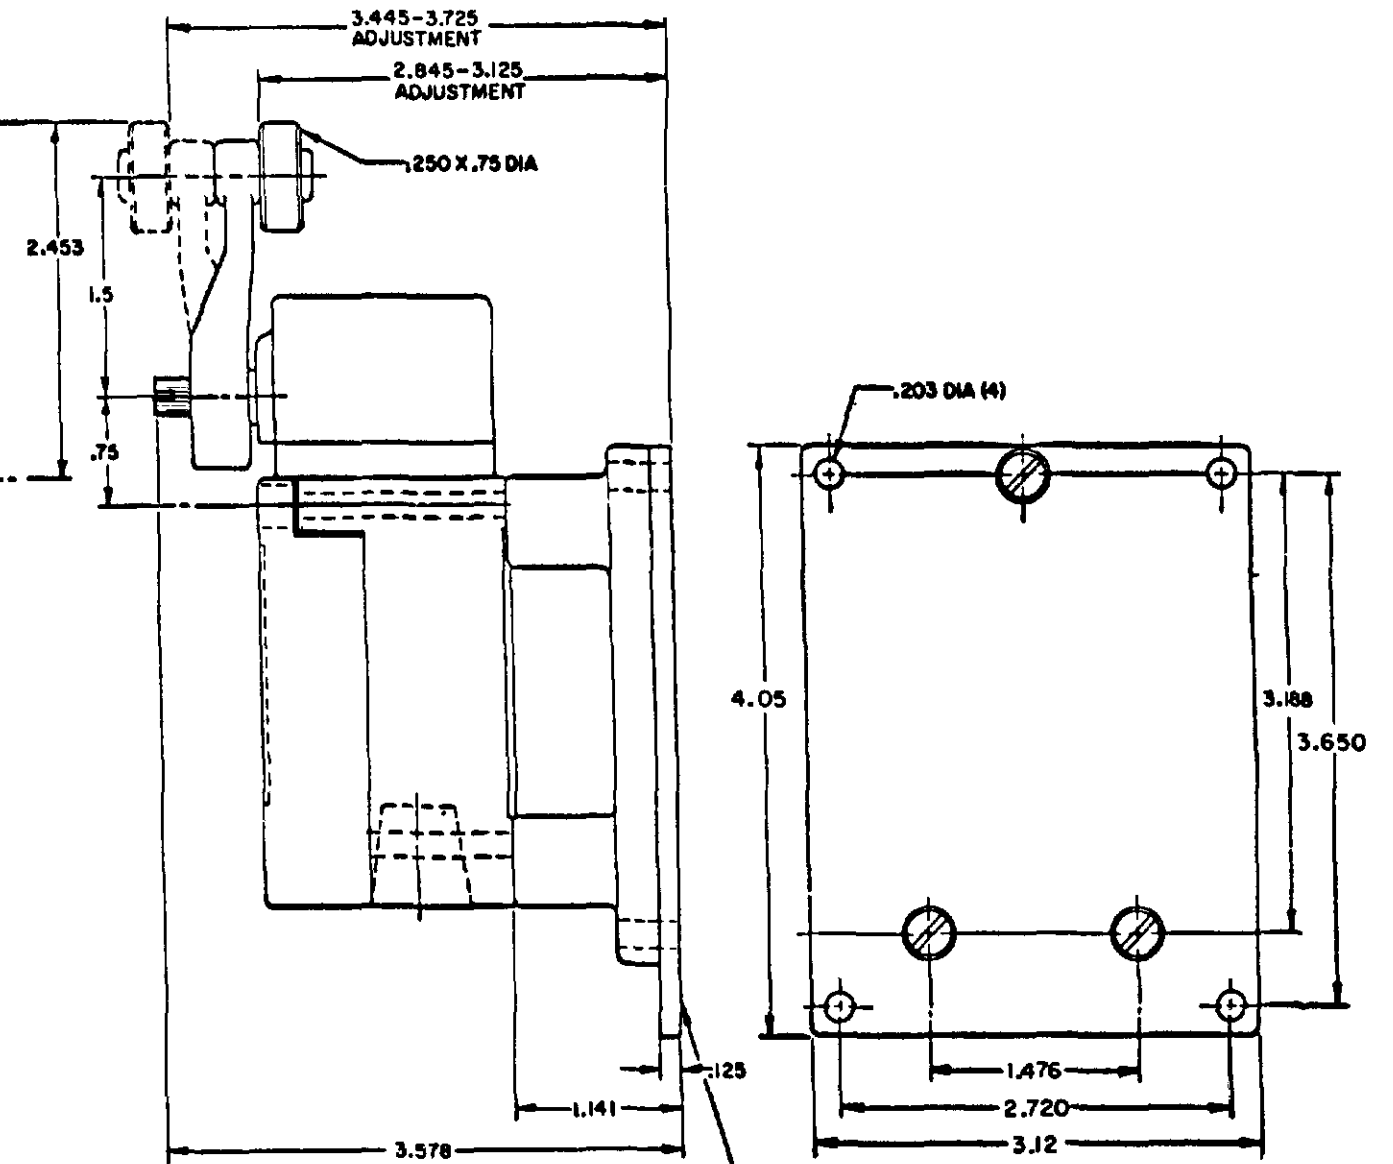

LSZ4004 (FURNISHED ASSEMBLED) CONVERSION BASE, WHEN USED WITH HDLS WILL GIVE SAME TRACKING AS 301LS TYPE (LIMIT SWITCH NOT INCLUDED)

SINGLE POLE TOP PLUNGER LSZ4003

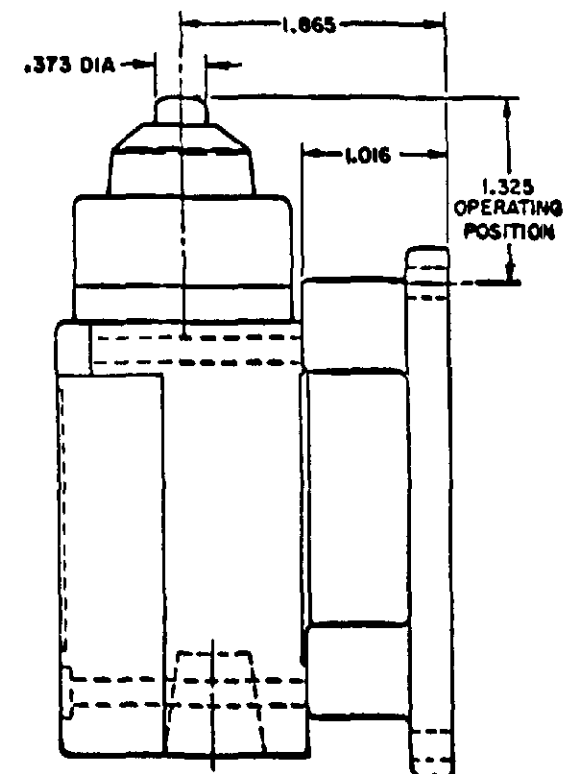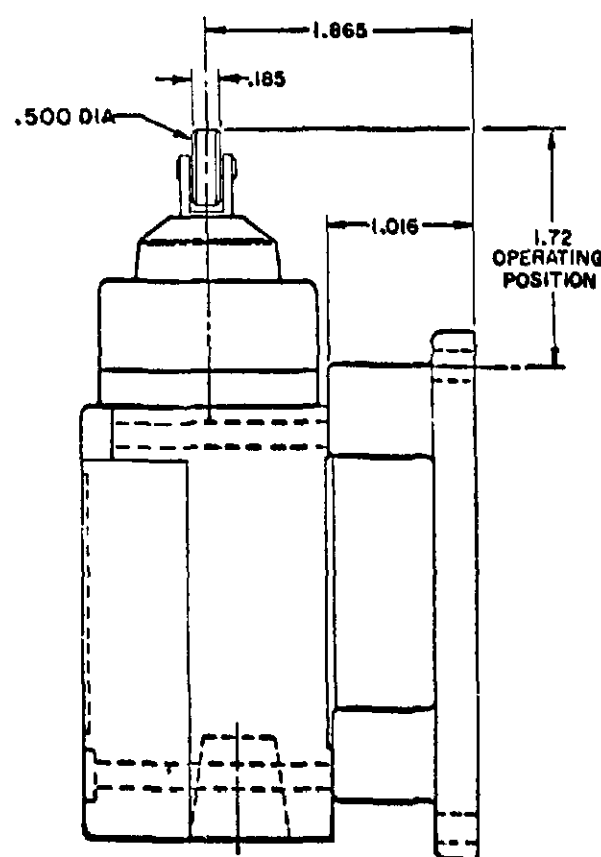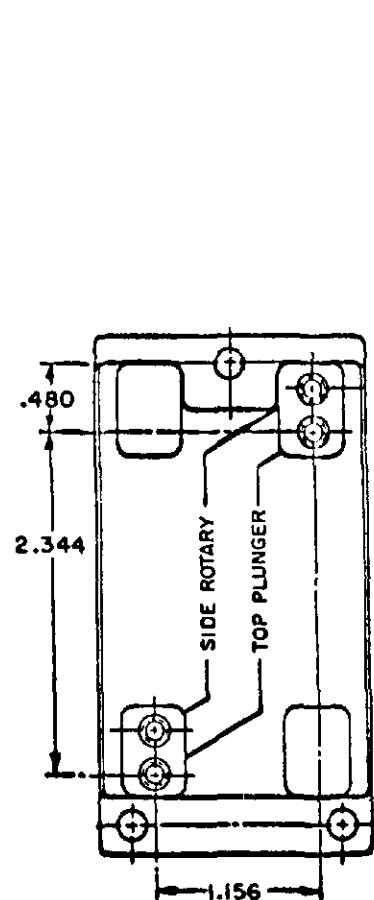

LSZ4003 CONVERSION BASE, WHEN USED WITH HDLS WILL GIVE SAME TRACKING AS 201LS TYPE (LIMIT SWITCH NOT INCLUDED)

TEMPERATURE LIMITATIONS FOR
DEVICES WITH FLUORSILICONE (LSYAB**) AND VITON (LSYAC**) SEALS

[illegible]

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

- 1 FLUORSILICONE SEAL (LSYAB**) FOR LOW TEMPERATURE APPLICATIONS
2 VITON SEALS (LSYAC**) FOR FIRE-RESISTANT FLUIDS
3 ALL EXCEPT A60

	LOW LIMIT	HIGH LIMIT
LSYAB	-40° F	+250° F
LSYAC	+10° F	+250° F
LSYBB	-20° F	+250° F
LSYBC	+30° F	+250° F
LSYCB	-40° F	+200° F
LSYCC	+10° F	+250° F
LSYDB	-40° F	+200° F
LSYDC	+10° F	+250° F
LSYEB	- 40° F	+200° F
LSYEC	+10° F	+250° F
LSYFB	- 40° F	+200° F
LSYFC	+10° F	+250° F
LSYGB	-20° F	+200° F
LSYGC	+30° F	+250° F
LSYHB	-20° F	+250° F
LSYHC	+30° F	+250° F
LSYJB	-40° F	+250° F
LSYJC	+30° F	+250° F
LSYKB	-20° F	+250° F
LSYKC	+30° F	+250° F
LSYLB	-40° F	+250° F
LSYLC	+10° F	+250° F
LSYMB	-40° F	+250° F
LSYMC	+10° F	+250° F
LSYNB	-20° F	+250° F
LSYNC	+30° F	+250° F
LSYPB	-40° F	+250° F
LSYPC	+10° F	+250° F
LSYRB	-20° F	+250° F
LSYRC	+30° F	+250° F
LSYVB	-40° F	+200° F
LSYVC	+10° F	+250° F
LSYWB	- 40° F	+200° F
LSYWC	+10° F	+250° F

SCALE

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

TOLERANCES ARE IN INCHES

TOLERANCES ARE

FIN. PLAYS	(.001)	1.000
INT. PLAYS	(.001)	1.000
SHK. PLAYS	(.001)	1.000
STOCKS		

NOT TO SCALE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSY SERIES
CHART 1

CATALOG LISTING		M		LSY SERIES CHART 1		PAGE 10 OF 10		10JUL07		RELEASE NO CO-78499		REPLACES LSY SERIES																																											
ISSUE		7																																																					
<table border="1"> <tr> <td colspan="2">REVISONS</td> <td colspan="2">CHECK</td> <td colspan="2">CHECK</td> <td colspan="2">CHECK</td> <td colspan="2">CHECK</td> <td colspan="2">CHECK</td> <td colspan="2">CHECK</td> </tr> <tr> <td>A</td> <td>199948</td> <td>CST</td> <td>10 JAN 00</td> <td>B</td> <td>200704</td> <td>CST</td> <td>23 JUN 00</td> <td>C</td> <td>200853</td> <td>CST</td> <td>21 JUL 00</td> <td>D</td> <td>202198</td> </tr> <tr> <td>E</td> <td>0012601</td> <td>CST</td> <td>23 JAN 01</td> <td>F</td> <td>0031956</td> <td>BS</td> <td>10JUL07</td> <td colspan="6"></td> </tr> </table>														REVISONS		CHECK		CHECK		CHECK		CHECK		CHECK		CHECK		A	199948	CST	10 JAN 00	B	200704	CST	23 JUN 00	C	200853	CST	21 JUL 00	D	202198	E	0012601	CST	23 JAN 01	F	0031956	BS	10JUL07						
REVISONS		CHECK		CHECK		CHECK		CHECK		CHECK		CHECK																																											
A	199948	CST	10 JAN 00	B	200704	CST	23 JUN 00	C	200853	CST	21 JUL 00	D	202198																																										
E	0012601	CST	23 JAN 01	F	0031956	BS	10JUL07																																																
RASTER		DRAWN																																																					
GJW	24 AUG 91	CHECK	JAF	12 SEP 94	CHECK	AK	19APR05	CHECK	PSR	10JUL07	RELEASE NO	CO-78499	REPLACES																																										

CATALOG LISTING		M		LSY SERIES CHART 1		PAGE 10 OF 10		10JUL07		RELEASE NO CO-78499		REPLACES LSY SERIES																																											
ISSUE		7																																																					
<table border="1"> <tr> <td colspan="2">REVISONS</td> <td colspan="2">CHECK</td> <td colspan="2">CHECK</td> <td colspan="2">CHECK</td> <td colspan="2">CHECK</td> <td colspan="2">CHECK</td> <td colspan="2">CHECK</td> </tr> <tr> <td>A</td> <td>199948</td> <td>CST</td> <td>10 JAN 00</td> <td>B</td> <td>200704</td> <td>CST</td> <td>23 JUN 00</td> <td>C</td> <td>200853</td> <td>CST</td> <td>21 JUL 00</td> <td>D</td> <td>202198</td> </tr> <tr> <td>E</td> <td>0012601</td> <td>CST</td> <td>23 JAN 01</td> <td>F</td> <td>0031956</td> <td>BS</td> <td>10JUL07</td> <td colspan="6"></td> </tr> </table>														REVISONS		CHECK		CHECK		CHECK		CHECK		CHECK		CHECK		A	199948	CST	10 JAN 00	B	200704	CST	23 JUN 00	C	200853	CST	21 JUL 00	D	202198	E	0012601	CST	23 JAN 01	F	0031956	BS	10JUL07						
REVISONS		CHECK		CHECK		CHECK		CHECK		CHECK		CHECK																																											
A	199948	CST	10 JAN 00	B	200704	CST	23 JUN 00	C	200853	CST	21 JUL 00	D	202198																																										
E	0012601	CST	23 JAN 01	F	0031956	BS	10JUL07																																																
RASTER		DRAWN																																																					
GJW		24 AUG 91		JAF		12 SEP 94		JAF		10JUL07		10JUL07																																											

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9