

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0536251674

Status:


Active

Overview:

slimstack_0635mm_025_pitch

Description:

0.635mm (.025") Pitch SlimStack™ Header, Surface Mount, Dual Row, Vertical Stacking, 13.00mm (.512") Stack Height, Lead-free, 160 Circuits, with Embossed Tape with Cover Packaging

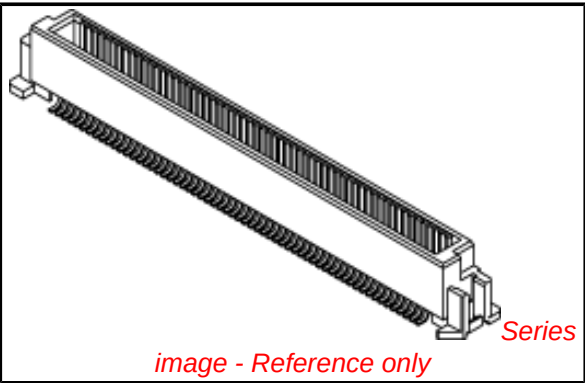

Documents:	
3D Model	Product Specification PS-52760-015 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

General	
Product Family	PCB Headers
Series	53625
Application	Board-to-Board
Comments	Stacking-Type
Overview	slimstack_0635mm_025_pitch
Product Name	SlimStack™
Physical	
Breakaway	No
Circuits (Loaded)	160
Circuits (maximum)	160
Color - Resin	Natural
Durability (mating cycles max)	50
First Mate / Last Break	No
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height (in)	0.276 In, 0.512 In
Mated Height (mm)	13.00 mm, 7.00 mm
Material - Metal	Phosphor Bronze, Stainless Steel
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.025 In
Pitch - Mating Interface (mm)	0.64 mm
Plating min: Mating (µin)	10
Plating min: Mating (µm)	0.25
Plating min: Termination (µin)	40
Plating min: Termination (µm)	1
Polarized to PCB	Yes
Robotic Placement	Metal Cap
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Surface Mount
Electrical	
Current - Maximum per Contact	0.5A

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

53625Series

Mates With

SlimStack™ Receptacle [52760](#) , [52837](#) , [52885](#) , [52901](#)

Voltage - Maximum

100V

Material Info

Reference - Drawing Numbers

Packaging Specification

Product Specification

Sales Drawing





SPK-53625-001

PS-52760-015, RPS-52760-017, RPS-52760-018,
RPS-52760-020, RPS-52760-021, RPS-52760-027,
RPS-52760-029

SD-53625-002, SD-53625-003

This document was generated on 05/25/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

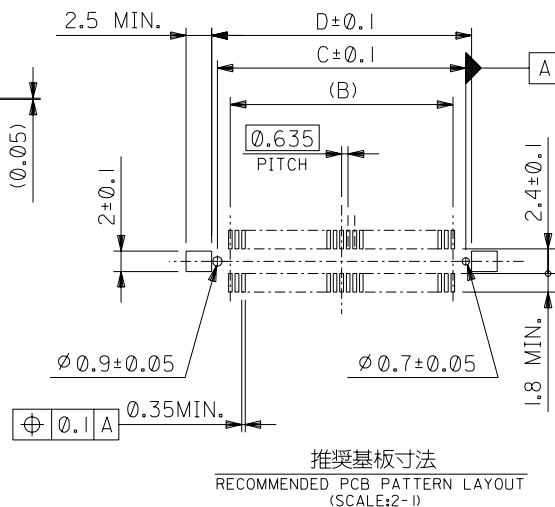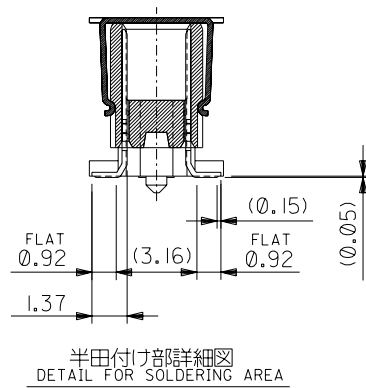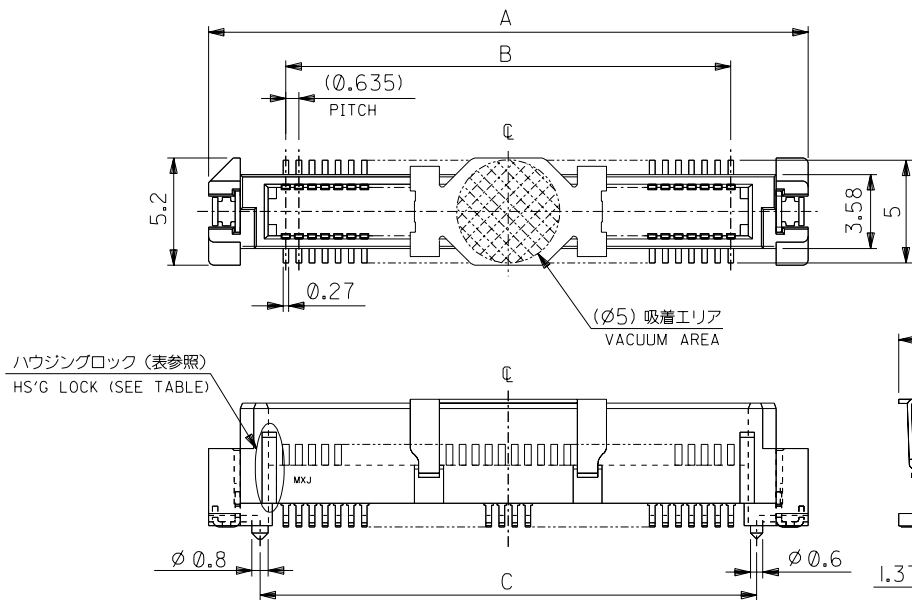注)
NOTES1. 材質
MATERIAL

ハウジング: ガラス入りPPS、茶色、UL94V-0
HOUSING: G.F. PPS, BROWN, UL94V-0
ターミナル: 銅合金 (t=0.2)
TERMINAL: COPPER ALLOY
補強金具: 銅合金 (t=0.25)
FITTING NAIL: COPPER ALLOY
吸着カバー: ステンレス (t=0.2)
VACUUM COVER: STAINLESS STEEL

2. メッキ仕様
PLATING

ターミナル: 接点部: 金メッキ 0.25 μm MIN.
TERMINAL: CONTACT AREA: GOLD 0.25 MICROMETER MIN.
半田付け部: 錫メッキ 1.0 μm MIN.
SOLDER TAIL AREA: TIN 1.0 MICROMETER MIN.
下地メッキ: ニッケルメッキ 1.5 μm MIN.
UNDER-PLATING: NICKEL 1.5 MICROMETER MIN.
補強金具: 錫メッキ 1.0 μm MIN.
FITTING NAIL: TIN 1.0 MICROMETER MIN.
下地メッキ: ニッケルメッキ 1.0 μm MIN.
UNDER-PLATING: NICKEL 1.0 MICROMETER MIN.


3. テールのバラツキ寸法
TAIL COPLANARITY

テール平坦度は、0.1 MAX. とする。
TAILS COPLANARITY TO BE 0.1 MAX.


4. エンボス対応済みの極数については、SD-53625-003を参照下さい。
FOR THE EMBOSSED PACKAGE PRODUCTS, SEE SD-53625-003.5. 本製品は53625-***2の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 53625-***2.

無し NO	79.17	78.07	75.565	83.07	53625-2474	53625-2472	240	○
	66.47	65.37	62.865	70.37	—	-2072	200	—
	60.12	59.02	56.515	64.02	—	-1872	180	—
	53.77	52.67	50.165	57.67	53625-1674	-1672	160	○
	47.42	46.32	43.815	51.32	—	-1472	140	○
	41.07	39.97	37.465	44.97	—	-1274	120	○
	34.72	33.62	31.115	38.62	—	-1074	100	—
	31.55	30.45	27.94	35.45	—	-0974	90	○
	28.37	27.27	24.765	32.27	—	-0874	80	○
	25.2	24.1	21.59	29.1	—	-0774	70	—
有り YES	24.56	23.46	20.955	28.46	—	-6874	68	—
	22.02	20.92	18.415	25.92	—	-0674	60	—
	18.85	17.75	15.24	22.75	—	-0574	50	○
	15.67	14.57	12.065	19.57	—	-0474	40	○
	12.5	11.4	8.89	16.4	—	-0374	30	○
	9.32	8.22	5.715	13.22	53625-0274	53625-0272	20	—
	ハウジングロック HS'G LOCK				エンボス梱包 EMBOSSED PACKAGING	製品番号 MATERIAL NO.	極数 CKT. NO.	量産対応 AVAILABLE
	D	C	B	A		MODEL NO.	53625-***72	

				材料 MATERIAL		注) 参照 SEE NOTES		molex MOLEX-JAPAN CO., LTD. 日本モレックス株式会社	
				仕上げ FINISH		注) 参照 SEE NOTES		REVISE ONLY ON CAD SYSTEM	
				適用電線範囲 WIRE RANGE		—		TITLE 名称	
				被覆外径 INS. RANGE		—		0.635 PITCH B-T-O-B CONN. PLUG HS'G COVER ASS'Y -LEAD FREE-	
				DRAWN BY '04/05/14 Y.WADA		CHK'D BY '04/05/14 M.SASAO		DWG. NO.	
				APP'D BY '04/05/14 M.SASAO		尺度 SCALE 4-1		SD-53625-002	
				一般公差 GENERAL TOLERANCES		記号 LTR		REV	
				新規格作成 RELEASED (J2004-4233)		変更内容 DR. CHK.		0	
				日付 DATE					

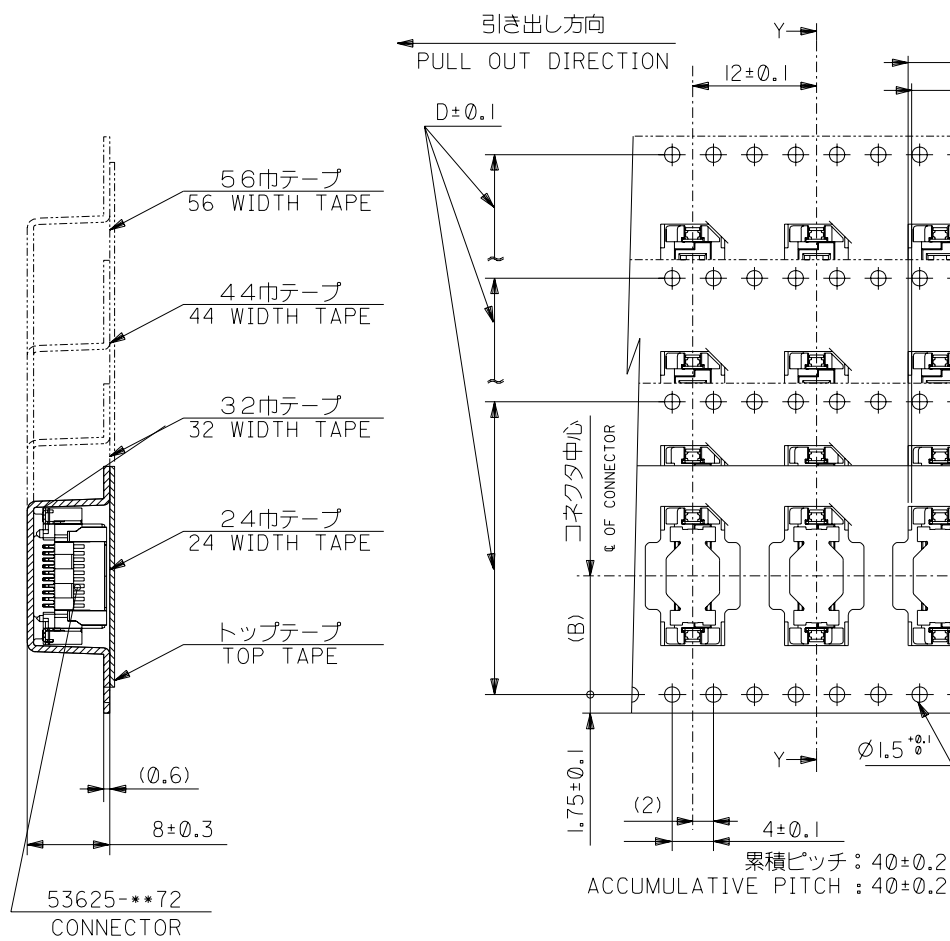

断面 Y-Y
SECTION Y-Y





61.4	57.4	52.4	56 ^{±0.3}	26.2	38.9	53625-1074	100	—
					35.8	-0974	90	○
49.4	45.4	40.4	44 ^{±0.3}	20.2	32.6	-0874	80	○
					29.4	-0774	70	—
					28.8	-6874	68	—
					26.2	-0674	60	—
					23.1	-0574	50	○
37.4	33.4	28.4	32 ^{±0.3}	14.2	19.9	-0474	40	○
29.4	25.4	—	24 ^{±0.3}	11.5	16.7	-0374	30	○
F	E	D	C	(B)	(A)	53625-0274	20	—

MATERIAL 注参照 SEE NOTES				MODEL NO. 53625-72	
仕上げ FINISH —				REVISE ONLY ON CAD SYSTEM	
適用電線範囲 WIRE RANGE —				TITLE 名称 53625-72 TAPING PACKAGE -LEAD FREE-	
被覆外径 INS. RANGE —				DWG. NO. (SHEET 2 OF 3) REV 0	
DRAWN BY '04/05/14 Y.WADA CHK'D BY '04/05/14 M.SASAO				SD-53625-003	
APP'D BY '04/05/14 M.SASAO SCALE —					

角度 ANGLE	±30
30 以上 OVER	±0.3
10 以上 30 未満	±0.25
10 未満 UNDER	±0.2
一般公差 GENERAL TOLERANCES	

新規作成 RELEASED (J2004-4233)	Y.W.	'04/05/14
変更内容 REVISION RECORD	M.S.	'04/05/14
記号 LTR	DR. CHK.	DATE

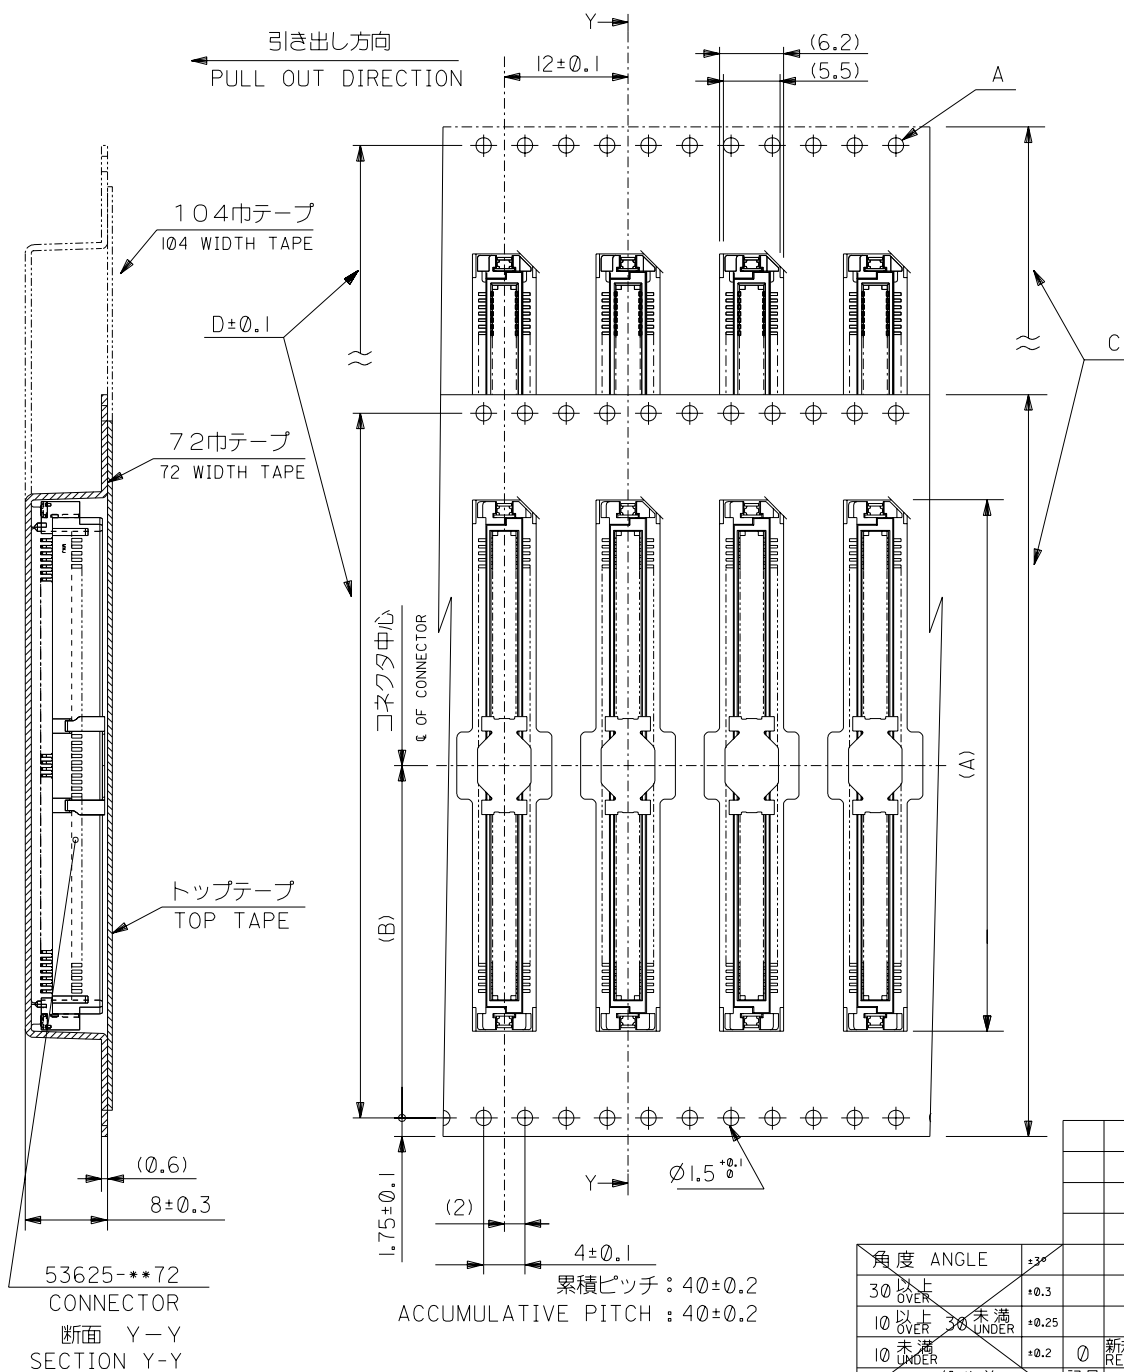

104.4	100.4	104±0.3	50.2	83.4	53625-2474	240	○
72.4	68.4	72±0.3	34.2	58	53625-1674	160	○
				51.6	53625-1474	140	○
				45.3	53625-1274	120	○
E	D	C	キャリアテープ幅 CARRIER TAPE WIDTH	(B)	(A)	MATERIAL NO.	極数 NO. OF (XTS) AVAILABLE

MODEL NO. 53625-**-74

材料
MATERIAL
注参照
SEE NOTES

molex MOLEX-JAPAN CO.,LTD.
日本モレックス株式会社

仕上げ
FINISH

REVISE ONLY ON CAD SYSTEM

適用電線範囲
WIRE RANGE

TITLE 名称

被覆外径
INS. RANGE

53625-**-72
TAPING PACKAGE
-LEAD FREE-

DRAWN BY '04/05/14
Y.WADA

CHK'D BY '04/05/14
M.SASAO

DWG. NO. (SHEET 3 OF 3)

APP'D BY '04/05/14
M.SASAO

尺度
SCALE

REV
0

角度 ANGLE	30°以上 OVER	30°未満 UNDER	10°未満 UNDER	10°未満 UNDER
一般公差 GENERAL TOLERANCES	±0.3	±0.25	±0.2	±0.2

記号 LTR	変更内容 REVISION RECORD	DR. CHK.	日付 DATE
0	新規作成 RELEASED (J2004-4233)	Y.W.	'04/05/14

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9