

ECS SERIES

Current Sensors



Description

The ECS Series of single-phase AC current sensors is a universal, overcurrent or undercurrent sensing control. Its built-in toroidal sensor eliminates the inconvenience of installing a stand-alone current transformer. Includes onboard adjustments for current sensing mode, trip point, and trip delay. Detects over or undercurrent events like locked rotor, loss of load, an open heater or lamp load, or proves an operation is taking place or has ended.

Operation

Input voltage must be supplied at all times for proper operation. When a fault is sensed throughout the trip delay, the output relay is energized. When the current returns to the normal run condition or zero, the output and the delay are reset. If a fault is sensed and then corrected before the trip delay is completed, the relay will not energize and the trip delay is reset to zero.

Adjustment

Select the desired function, over or under current sensing. Set the trip point and trip delay to approximate settings. Apply power to the ECS and the monitored load. Turn adjustment and watch the LED. LED will light; turn slightly in opposite direction until LED is off. Adjustment can be done while connected to the control circuitry if the trip delay is set at maximum. To increase sensitivity, multiple turns may be made through the ECS's toroidal sensor. The appropriate trip point range is determined by multiplying the amperage load by the number of turns/passes through the toroidal sensor. When using an external CT, select a 2VA, 0-5A output CT rated for the current to be monitored. Select ECS adjustment range 0. Pass one secondary wire lead through the ECS toroid and connect the secondary leads together.

Wiring Diagram



V = Voltage
I> = Overcurrent
I< = Undercurrent
W = Insulated Wire Carrying Monitored Current

Relay contacts are isolated. Arrow on the toroid points toward the load.

Ordering Information

See next page.

Features & Benefits

| FEATURES | BENEFITS |
|---|--|
| Built-in toroidal current sensing | Eliminates need to install stand-alone current transformer and provides isolation from monitored circuit |
| Encapsulated | Protects against shock, vibration, and humidity |
| Adjustable mode, trip point and trip delay | Provides flexibility for use in many applications |
| 10A, SPDT isolated relay output | Allows control of AC voltage loads |

Accessories



P1015-13 (AWG 10/12), **P1015-64** (AWG 14/16), **P1015-14** (AWG 18/22) **Female Quick Connect**
These 0.25 in. (6.35 mm) female terminals are constructed with an insulator barrel to provide strain relief.

ECS SERIES

Ordering Information

| MODEL | SENSING | INPUT VOLTAGE | TRIP POINT ADJUSTABLE | TRIP DELAY | SENSING DELAY ON STARTUP |
|--------------|----------------------------------|---------------|-----------------------|------------|--------------------------|
| ECS20BC | Selectable, over or undercurrent | 24VAC | 0.5 - 5A | 0.5 - 50s | 1s |
| ECS21BC | Selectable, over or undercurrent | 24VAC | 2 - 20A | 0.5 - 50s | 1s |
| ECS2HBC | Selectable, over or undercurrent | 24VAC | 5 - 50A | 0.5 - 50s | 1s |
| ECS30AC | Selectable, over or undercurrent | 24VDC | 0.5 - 5A | 0.150 - 7s | 1s |
| ECS40A | Selectable, over or undercurrent | 120VAC | 0.5 - 5A | 0.150 - 7s | 0s |
| ECS40AC | Selectable, over or undercurrent | 120VAC | 0.5 - 5A | 0.150 - 7s | 1s |
| ECS40BC | Selectable, over or undercurrent | 120VAC | 0.5 - 5A | 0.5 - 50s | 1s |
| ECS41A | Selectable, over or undercurrent | 120VAC | 2 - 20A | 0.150 - 7s | 0s |
| ECS41AC | Selectable, over or undercurrent | 120VAC | 2 - 20A | 0.150 - 7s | 1s |
| ECS41BC | Selectable, over or undercurrent | 120VAC | 2 - 20A | 0.5 - 50s | 1s |
| ECS41BD | Selectable, over or undercurrent | 120VAC | 2 - 20A | 0.5 - 50s | 2s |
| ECS41BH | Selectable, over or undercurrent | 120VAC | 2 - 20A | 0.5 - 50s | 6s |
| ECS4HBC | Selectable, over or undercurrent | 120VAC | 5 - 50A | 0.5 - 50s | 1s |
| ECS4HBH | Selectable, over or undercurrent | 120VAC | 5 - 50A | 0.5 - 50s | 6s |
| ECS60AH | Selectable, over or undercurrent | 230VAC | 0.5 - 5A | 0.150 - 7s | 6s |
| ECS60BC | Selectable, over or undercurrent | 230VAC | 0.5 - 5A | 0.5 - 50s | 1s |
| ECS61BC | Selectable, over or undercurrent | 230VAC | 2 - 20A | 0.5 - 50s | 1s |
| ECS6HAH | Selectable, over or undercurrent | 230VAC | 5 - 50A | 0.150 - 7s | 6s |
| ECSH21F2.5C | Overcurrent | 24VAC | 2 - 20A | 2.5s | 1s |
| ECSH30AC | Overcurrent | 24VDC | 0.5 - 5A | 0.150 - 7s | 1s |
| ECSH31AD | Overcurrent | 24VDC | 2 - 20A | 0.150 - 7s | 2s |
| ECSH31F.08D | Overcurrent | 24VDC | 2 - 20A | 0.08s | 2s |
| ECSH3HF0.08D | Overcurrent | 24VDC | 5 - 50A | 0.08s | 2s |
| ECSH34F.08C | Overcurrent | 24VDC | 4A non-adjustable | 0.08s | 1s |
| ECSH40A | Overcurrent | 120VAC | 0.5 - 5A | 0.150 - 7s | 0s |
| ECSH40AC | Overcurrent | 120VAC | 0.5 - 5A | 0.150 - 7s | 1s |
| ECSH40AD | Overcurrent | 120VAC | 0.5 - 5A | 0.150 - 7s | 2s |
| ECSH41AC | Overcurrent | 120VAC | 2 - 20A | 0.150 - 7s | 1s |
| ECSH41AD | Overcurrent | 120VAC | 2 - 20A | 0.150 - 7s | 2s |
| ECSH41BC | Overcurrent | 120VAC | 2 - 20A | 0.5 - 50s | 1s |
| ECSH41F.08D | Overcurrent | 120VAC | 2 - 20A | 0.08s | 2s |
| ECSH4HAD | Overcurrent | 120VAC | 5 - 50A | 0.150 - 7s | 2s |
| ECSH4HF.08D | Overcurrent | 120VAC | 5 - 50A | 0.08s | 2s |
| ECSH61AD | Overcurrent | 230VAC | 2 - 20A | 0.150 - 7s | 2s |
| ECSL31A | Undercurrent | 24VDC | 2 - 20A | 0.150 - 7s | 0s |
| ECSL40AC | Undercurrent | 120VAC | 0.5 - 5A | 0.150 - 7s | 1s |
| ECSL40B | Undercurrent | 120VAC | 0.5 - 5A | 0.5 - 50s | 0s |
| ECSL40BH | Undercurrent | 120VAC | 0.5 - 5A | 0.5 - 50s | 6s |
| ECSL41A | Undercurrent | 120VAC | 2 - 20A | 0.150 - 7s | 0s |
| ECSL41AD | Undercurrent | 120VAC | 2 - 20A | 0.150 - 7s | 2s |
| ECSH4HAD | Overcurrent | 120VAC | 5 - 50A | 0.150 - 7s | 2s |
| ECSL41AH | Undercurrent | 120VAC | 2 - 20A | 0.150 - 7s | 6s |
| ECSL4HAC | Undercurrent | 120VAC | 5 - 50A | 0.150 - 7s | 1s |
| ECSL4HBH | Undercurrent | 120VAC | 5 - 50A | 0.5 - 50s | 6s |
| ECSL61AH | Undercurrent | 230VAC | 2 - 20A | 0.150 - 7s | 6s |
| ECSL6HAC | Undercurrent | 230VAC | 5 - 50A | 0.150 - 7s | 1s |

If you don't find the part you need, call us for a custom product 800-843-8848

ECS SERIES

Specifications

Sensor

Type Toroidal through hole wiring
Mode Over or undercurrent, switch selectable on the unit or factory fixed

Trip Point Range 0.5 - 50A in 3 adjustable ranges or fixed

Tolerance
Adjustable Guaranteed range
Fixed 0.5 - 25A: 0.5A or $\pm 5\%$ whichever is less;
26 - 50A: $\pm 2.5\%$

Maximum Allowable Current Steady – 50A turns;
Inrush – 300A turns for 10s

Trip Point Hysteresis $\approx \pm 5\%$

Trip Point vs. Temperature $\pm 5\%$

Response Time $\leq 75\text{ms}$

Frequency 45/500 Hz

Type of Detection Peak detection

Trip Delay

Type Analog

Range

Adjustable 0.150 - 7s; 0.5 - 50s (guaranteed ranges)

Factory Fixed $\pm 10\%$

Delay vs. Temperature $\pm 15\%$

Sensing Delay on Startup Factory fixed 0 - 6s: +40%, -0%

Input

Voltage 24 , 120, or 230VAC; 12 or 24VDC

Tolerance

12VDC & 24VDC/AC -15 - 20%

120 & 230VAC -20 - 10%

AC Line Frequency 50/60 Hz

Output

Type Electromechanical relay

Form Isolated, SPDT

Rating 10A resistive @ 240VAC; 1/4 hp @ 125VAC;

1/2 hp @ 250VAC

Life Mechanical – 1×10^6 ; Electrical – 1×10^5

Protection

Circuitry Encapsulated

Isolation Voltage $\geq 2500\text{V RMS}$ input to output

Insulation Resistance $\geq 100 \text{ M}\Omega$

Mechanical

Mounting Surface mount with two #6 (M3.5 x 0.6) screws

Dimensions **H** 88.9 mm (3.5"); **W** 63.5 mm (2.5");

D 44.5 mm (1.75")

Termination 0.25 in. (6.35 mm) male quick connect terminals (5)


Environmental

Operating/Storage Temperature -40° to 60°C / -40° to 85°C

Humidity 95% relative, non-condensing

Weight $\approx 6.4 \text{ oz}$ (181 g)

Function Diagrams

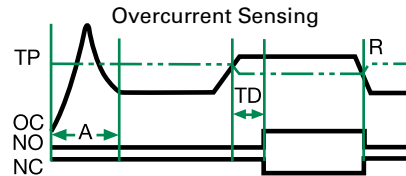

NO = Normally Open Contact
NC = Normally Closed Contact


A = Sensing Delay On Start Up

TD = Trip Delay

TP = Trip Point

R = Reset

OC = Monitored Current

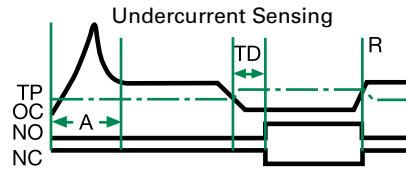

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9