

VIP-2/SC/FLK10

Order No.: 2315010

The illustration shows a 16-position version

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2315010>

VARIOFACE module, with screw connection and flat-ribbon cable plug connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 10-pos.



Commercial data

| | |
|--------------------------|--------------------|
| EAN | 4046356310062 |
| Pack | 1 pcs. |
| Customs tariff | 85369010 |
| Weight/Piece | 0.0887 KG |
| Catalog page information | Page 278 (IF-2009) |

Product notes

WEEE/RoHS-compliant since:
09/02/2008

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|---|------------|
| Nominal voltage U_N | 60 V AC/DC |
| Max. current carrying capacity per branch | 1 A |
| Number of positions | 10 |
| Width | 34.7 mm |

| | |
|---|------------------|
| Height | 56 mm |
| Depth | 65.5 mm |
| Status display | No |
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Mounting position | Any |
| Standards/regulations | IEC 60664 |
| | DIN EN 50178 |
| | IEC 62103 |
| Pollution degree | 2 |
| Surge voltage category | II |

Connection data

| | |
|--|--|
| Type of connection | Screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| Stripping length | 8 mm |
| Screw thread | M 3 |
| Connection 2 | Flat-ribbon cable connection |
| Type of connection | Flat-ribbon cable plug connector in acc. with IEC 60603-13 |
| Number of positions | 10 |

Certificates / Approvals



Certification CSA, CUL, UL

CSA

| | |
|-----------------------|-------|
| Nominal voltage U_N | 125 V |
| Nominal current I_N | 1 A |
| AWG/kcmil | 30-12 |

CUL

| | |
|-----------------------|-------|
| Nominal voltage U_N | 125 V |
| Nominal current I_N | 1 A |
| AWG/kcmil | 30-12 |

UL

| | |
|-----------------------|-------|
| Nominal voltage U_N | 125 V |
| Nominal current I_N | 1 A |
| AWG/kcmil | 30-12 |

Accessories

| Item | Designation | Description |
|------------------------|--------------------------|--|
| Cable/conductor | | |
| 2299204 | FLK 10/EZ-DR/ 50/KONFEK | Round cable set, with two 10-pos. socket strips, (1:1 connection), cable length: 0.5 m |
| 2299217 | FLK 10/EZ-DR/ 100/KONFEK | Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 1 m |
| 2299220 | FLK 10/EZ-DR/ 150/KONFEK | Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 1.5 m |
| 2299233 | FLK 10/EZ-DR/ 200/KONFEK | Round cable set, with two 10-pos. socket strips, (1:1 connection), cable length: 2 m |
| 2299246 | FLK 10/EZ-DR/ 300/KONFEK | Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 3 m |
| 2299259 | FLK 10/EZ-DR/ 400/KONFEK | Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 4 m |
| 2299262 | FLK 10/EZ-DR/ 600/KONFEK | Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 6 m |
| 2299275 | FLK 10/EZ-DR/ 800/KONFEK | Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 8 m |
| 2299288 | FLK 10/EZ-DR/1000/KONFEK | Round cable set, with two 10-pos. socket strips (1:1 connection), cable length: 10 m |
| 2295059 | FLK EZ-DR.../.../... | Round cable, with preassembly, not shielded, variable cable length |
| 2318376 | VIP-CAB-FLK10-0,14/... | Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: Variable |
| 2318305 | VIP-CAB-FLK10/0,14/0,5M | Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 0.5 m |

| | | |
|---------|-------------------------|---|
| 2318318 | VIP-CAB-FLK10/0,14/1,0M | Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1 m |
| 2318321 | VIP-CAB-FLK10/0,14/1,5M | Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1.5 m |
| 2318334 | VIP-CAB-FLK10/0,14/2,0M | Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 2 m |
| 2318347 | VIP-CAB-FLK10/0,14/3,0M | Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 3 m |
| 2318350 | VIP-CAB-FLK10/0,14/4,0M | Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 4 m |
| 2318363 | VIP-CAB-FLK10/0,14/6,0M | Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 6 m |

General


| | | |
|---------|-------------|--|
| 5147777 | BLUEMARK X1 | Printers with UV technology for printing plastic labels in UniCard format. |
|---------|-------------|--|

Marking

| | | |
|---------|--------------------|--|
| 0818085 | UC-TM 6 | UniCard sheets, for labeling terminal blocks using Zack marker strip groove,80-section, labeling with BLUEMARK X1 and CMS-P1-PLOTTER, color: White |
| 0811862 | ZB 22:UNBEDRUCKT | Zack marker strip, unprinted: 4-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks, for a terminal width of 22 mm, color: White |
| 0809793 | ZB 5,08:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks per pack |

Diagrams/Drawings

Circuit diagram

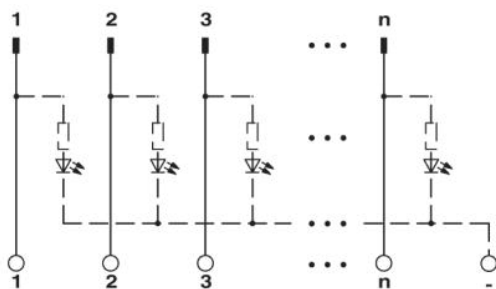

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9