

crydom[®]

Solid State Relays & Contactors



The Global Expert in **Solid State Switching** Technology


Sensata
Technologies



Crydom, global expert in solid state switching technology, combines technology and innovation to provide customers a wide range of standard Solid State Relays and Solid State Contactors, and specializes in custom designed solid state switching solutions for any load control application. Crydom is a brand of Sensata Technologies.

www.crydom.com



Sensata Technologies is one of the world's leading suppliers of sensing, electrical protection, control and power management solutions with operations and business centers in 13 countries. Sensata's products improve safety, efficiency and comfort for millions of people every day in automotive, appliance, aircraft, industrial, military, heavy vehicle, heating, air-conditioning and ventilation, data, telecommunications, recreational vehicle and marine applications. For more information please visit Sensata's website at:

www.sensata.com

About this catalog...

Products included in this catalog are only part of the Crydom offer of Solid State Relays and Contactors. To facilitate the use of this catalog, products have been categorized into 6 product groups mainly defined by mounting type.

The following conditions are applicable to product families where specifically noted:

- A** All dimensions in drawings are in inches [millimeters] and are for reference only.
- B** Dimensional drawings shown are for illustrative purposes only. They do not represent the complete variety of products within each series. For complete dimensional drawings for a particular Crydom product visit the CAD Drawings section in the Crydom website.
- C** Part Number Nomenclature is color coded as follows:
 - Required for valid part number
 - For options only and not required for valid part number
- D** Not all part number combinations are available. Contact Crydom Sales Support for information on the availability of a specific part number.
- E** Safety agency approvals for SSR/Heat Sink Assemblies may vary depending upon selected SSR. Heat sinks do not require safety agency approval.
- F** The standard Crydom SSR/Heat Sink Assemblies are either DIN Rail or Panel Mounted depending upon model selected and are available with either one, two or three single or dual SSRs, or one three-phase SSR.
- G** Installing a CN Series SSR in a socket that does not have matching input/output specifications may result in non-operation or damage to either the SSR, socket or both. See socket-relay compatibility table available in CN Series SSR datasheet.
- H** In addition to the possible combinations shown in the part number nomenclature, any standard Crydom PCB Mount SIP type SSR with similar pin centers can be offered as an assembly.
- J** Listed agency approvals may not apply to all part numbers available within a series. To determine agency approvals for a specific part number contact Crydom Technical Support.
- K** Required external heat sink for all ratings.
- L** Heat sink includes the necessary hardware to mount the relay(s) onto the heat sink. The number of hardware kits (HK1 or HKM1) included depends upon the number and type of SSRs possible to install on each heat sink.



Panel Mount

Page 8

AC

DC



PCB Mount

Page 35

AC

DC



DIN Rail Mount

Page 47

AC

DC



Plug-In Mount

Page 66

AC

DC



Assemblies

Page 71




Accessories

Page 73

What is a Solid State Relay/Contactor?

A Solid State Relay or Contactor (SSR or SSC) is an electronic component that switches Power (AC or DC current) to a load circuit and provides electrical isolation between an application's control circuit and load circuit. It is a competitive technology to Electromechanical Relays (EMRs) and other switching technologies such as Mercury Displacement Relays (MDRs) and discrete component assemblies.

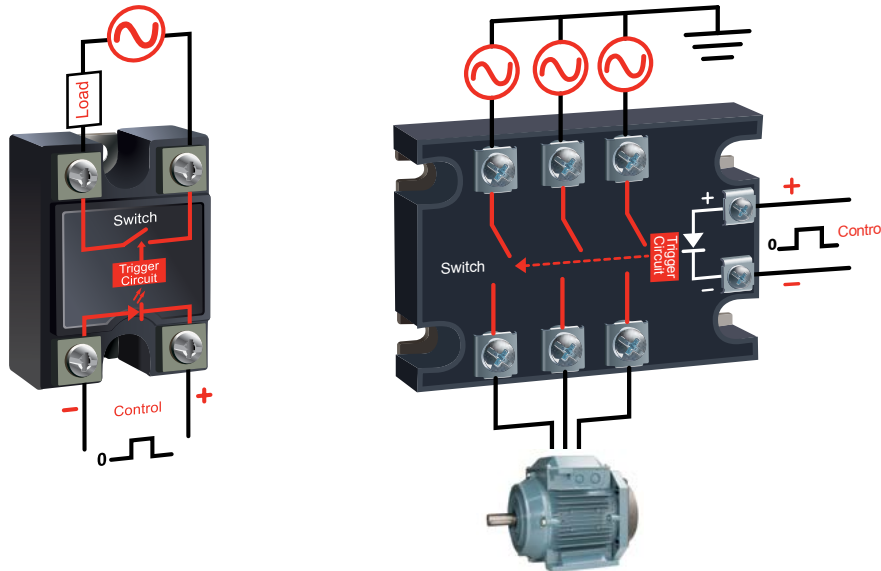


Why use Solid State Switching Technology?



Long life




Quiet operation



Minimum electrical noise




Low power consumption



Shock & vibration resistant



Ideal for harsh environments



Compatibility with control systems




Fast switching




Position insensitive



Reduced weight



Magnetic noise immunity



Reduced energy cost

Applications

Although there are literally thousands of individual uses for Solid State Relays and Contactors, most can be categorized into the following applications:

Motion Control

Includes elevators, lifts, hoists, exercise equipment, conveyor systems, solar trackers, fans, solenoid and valve control.

Benefits: Endurance, shock & vibration resistance, Soft Start, reversing, no arcing, fast switching, long life, no maintenance, easy to interface, reduced parts count.

Heating Control

This encompasses the largest segment of solid state relay users. Applications include, but are not limited to: professional food equipment, plastic molding/extrusion machinery, HVAC&R and soldering equipment.

Benefits: Long life, no maintenance, safe product, easy to interface, as well as enabling temperature accuracy. Suitable for heater, fan, blower and valve control.

Power Control

Includes power supplies, transformers, regulators, inverters, converters, UPS systems, etc. as well as any load that is not specifically for heating, lighting or motion control.


Benefits: Long life, silent operation, high speed switching, endurance, mechanical shock and vibration resistance, position insensitive, logic compatibility, arc and bounce free switching, and low electromagnetic emissions.

Lighting Control

These applications are usually broken down into three categories: theatrical, warehouse and commercial. Many of the products used in this segment are custom designed.

Benefits: Dimming, silent operation, fast switching, long life, no maintenance, safe product, easy to interface, reduced parts count.

Solid State Relays versus Solid State Contactors

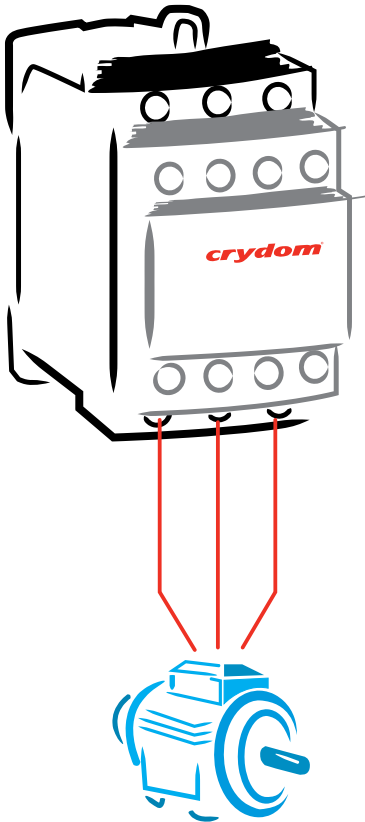

Crydom has been well known for over 40 years as a supplier of Solid State Relays (SSRs). However, Crydom also designs, manufactures and markets Solid State Contactors (SSCs). **What is the difference between SSRs and SSCs?**

Remarkably, **there is very little actual difference**. They use similar power semiconductors and control circuits, and in some cases, even the same housings. SSRs, being considered as components, are applied in a large variety of applications and uses. SSCs, are generally applied in 3 phase AC heater and motor control applications although the SSCs themselves can be used successfully in almost any load control application. **Why then are they viewed and applied differently?**

There are two main reasons: **Tradition** and **Ratings**.

Tradition is that for most AC power control applications utilizing 3 phase AC power and some DC applications, traditional mechanical contactors are employed. (Note: mechanical contactors rated to switch AC loads are quite different from those rated for DC loads of similar currents due to the arcing and contact degradation associated with making and breaking a DC circuit). Therefore when the need arises to use solid state technology in these type applications rather than EMRs,

engineers immediately think of Solid State “Contactors”, not Solid State “Relays”. So they are disposed to consider SSCs rather than SSRs despite the fact that **SSRs can perform exactly the same switching function as a Contactor**.

Ratings of contactors, whether Solid State or Mechanical, always include allowed motor load ratings and allowed resistive load ratings. The reason for this is again tradition because for most mechanical contactors, the switching capabilities and life expectancy vary significantly for each type of load. Further, motor control requires consideration of such aspects as Locked Rotor Rating, Full Load Current Ratings and Horse Power Rating, while resistive load ratings must account for significant inrush current that also degrades mechanical contacts. SSRs and SSCs don’t suffer the same type degradation due to load characteristics as mechanical contacts do and therefore the motor and resistive load ratings are not as widely different. However the one significant differentiator is that **to be considered a contactor, the SSR or SSC must be evaluated to and carry ratings appropriate for motor control**.

So in summary, the major technical difference between an SSR and SSC has to do with the mandatory motor ratings required to be defined as a “Contactor”.

Panel Mount

Crydom Panel Mount Solid State Relays and Contactors are designed to easily mount on panels or heat sinks for applications which require **single, dual or 3 phase output ratings** in the range of **5 to 125 Amps at 24 to 660 VAC or 1 to 160 Amps at 1 to 1000 VDC**. Available inputs include 24 to 280 VAC, 3 to 32 VDC or analog control depending upon model.

Offered in several configurations including three industry standard size and mounting styles, Crydrom Panel Mount SSRs and Contactors provide both an easy means to mechanically secure them in equipment and provide a reliable thermal path to dissipate thermal energy. Models and options include screw termination, quick connections, optional protective covers, input indicator LEDs and thermal interface pads, as well as heat sinks and SSR/Heat Sink Assemblies.

See the product pages for a summary of **available ratings, features and Safety Agency approvals**. Visit the SSR Accessories and Assemblies sections of the catalog or the Crydom website for additional information on Crydom SSRs, Contactors and available accessories for Panel Mount SSRs, Contactors and Assemblies.


[illegible][illegible]

Series 1 • 10-125 Amps



- Crydom's Signature family of Solid State Relays
- Ratings from 10 to 125 Amps @ 24-280 VAC and from 25 to 90 Amps @ 80-530 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Flexible 3-32 VDC, 18-36 VAC or 90-280 VAC Control Voltage
- Elective "ultra-low" input current draw (2-4 mAmps DC typical, "T" suffix option)
- Optional output R-C Snubber for additional dv/dt attenuation
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- Elective Internal TVS ("P" suffix) eliminates the need for external Overvoltage Protection
- A pre-attached Thermal Pad can be ordered to eliminate the need for thermal compound using the "H" suffix
- Optional Normally Closed output ("B" suffix option)
- UL 508 overload endurance rated and 100 kA Short Circuit Current Rating (SCCR)

Notes: **A B C D J K**

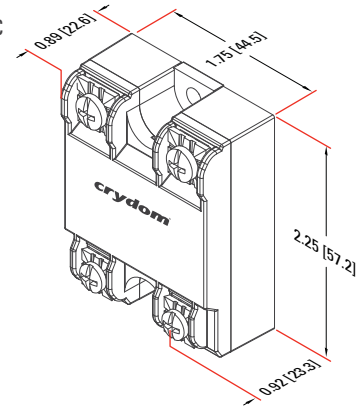

4	A	12	10	E	K	P	G	S	H	T	-10	-B
Control Voltage A: 90-280 VAC D: 3-32 VDC (4-32 VDC for 48 suffix) AxxxxE: 18-36 VAC (12 & 24 suffixes only)				Overvoltage Protection (12 & 24 suffixes only) Blank: Not Included P: Included			Snubber Blank: Not Included S: Included (Not needed with T suffix, included as standard)		Blank: Phototriac T: Low Current Phototransistor (Not needed with -B suffix, included as standard)		Output Type Blank: Normally Open -B: Normally Closed (12 & 24 suffixes only. Snubber included, not available with -10 option)	
Output Frequency Blank: 47-440 Hz 4: 400 Hz (12 & 24 suffixes only)		Operating Voltage 12: 24-140 VAC 24: 24-280 VAC 48: 48-530 VAC		Rated Load Current 10: 10 Amp (12 & 24 suffixes only) 25: 25 Amp 40: 40 Amp (12 suffix only) 50: 50 Amp (24 & 48 suffixes only) 75: 75 Amp (24 & 48 suffixes only) 90: 90 Amp (24 & 48 suffixes only) 110: 110 Amp (24 suffix only) 125: 125 Amp (24 suffix only)		Termination Blank: Screw F: Quick Connect (Single pair [up to 25 Amp] Double pair [50 Amp]) K: Installed standoffs for PC Board mounting		Input Status LED (12 & 24 suffixes only) Blank: Not Included G: Included		Thermal Pad Blank: Not Included H: Included		Switching Type Blank: Zero Voltage Turn-On -10: Instantaneous Turn-On


Complete specifications of these & other Crydom products available at: www.crydom.com

HA/HD Series • 12-125 Amps



- Solid State Relay with ratings from 12 to 125 Amps @ 48-660 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Flexible 4-32 VDC, 18-36 VAC or 90-280 VAC Control Voltage
- Elective "ultra-low" input current draw (2-4 mAmps DC typical, "T" suffix option)
- R-C Snubber network for additional dv/dt attenuation (for HA48/HD48 models only)
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- Elective Internal TVS ("P" suffix) eliminates the need for external Overvoltage Protection
- A pre-attached Thermal Pad can be ordered to eliminate the need for thermal compound using the "H" suffix
- UL 508 overload endurance rated and 100 kA Short Circuit Current Rating (SCCR)

Notes: **A B C D J K**

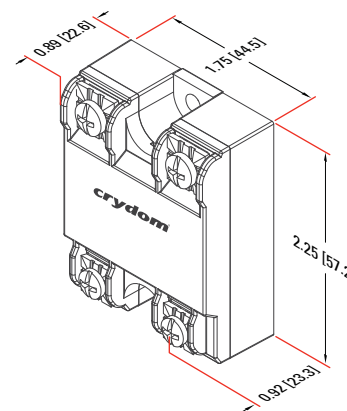

Series	Control Voltage	Operating Voltage	Rated Load Current	Termination	Input Status LED	Thermal Pad	Switching Type
H	A: 90-280 VAC D: 4-32 VDC AxxxxE: 18-36 VAC	48: 48-530 VAC 60: 48-660 VAC	12: 12 Amp (48 suffix only) 25: 25 Amp 50: 50 Amp 75: 75 Amp (48 suffix only) 90: 90 Amp 110: 110 Amp (48 suffix only) 125: 125 Amp	Blank: Screw F: Quick Connect (Single pair [up to 25 Amp] Double pair [50 Amp]) K: Installed standoffs for PC Board mounting	Blank: Not Included G: Included	Blank: Not Included H: Included	Blank: Zero Voltage Turn-On -10: Instantaneous Turn-On
A							
48							
25							
E							
K							
P							
G							
S							
H							
T							
-10							

Snubber

Blank: Not Included

S: Included

(Hx48xx and Hx48xxT only
Not needed with T suffix,
included as standard)

Trigger Circuit

Blank: Phototriac
T: Low Current
Phototransistor

Overvoltage Protection

Blank: Not Included
P: Included

Input Status LED

Blank: Not Included
G: Included

Thermal Pad

Blank: Not Included
H: Included

Switching Type


Blank: Zero Voltage Turn-On
-10: Instantaneous Turn-On

Series H1 • 25-125 Amps




- Solid State Relay with ratings from 25 to 125 Amps @ 48-690 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Flexible 4-32 VDC Control Voltage
- Low output off-state leakage current (2WD & 6WD suffixes only, snubberless)
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- Elective Internal TVS ("P" suffix) eliminates the need for external Overvoltage Protection (2D & 2WD suffixes only)
- A pre-attached Thermal Pad can be ordered to eliminate the need for thermal compound using the "H" suffix
- UL 508 overload endurance rated and 100 kA Short Circuit Current Rating (SCCR)

Notes: **A B C D J K**




Assemblies
Page 71



Compatible
Accessories
Page 73

Series	Transient Overvoltage	Rated Load Current	Overvoltage Protection (2D & 2WD suffixes only)	Thermal Pad	Input Status LED	Switching Type
H1	2D: 1200 Vpk (with Snubber) 2WD: 1200 Vpk (without Snubber) 6WD: 1600 Vpk (without Snubber)	25: 25 Amp 50: 50 Amp 75: 75 Amp 90: 90 Amp 125: 125 Amp (2D & 2WD suffixes only)	Blank: Not Included P: Included	Blank: Not Included H: Included	Blank: Not Included G: Included	Blank: Zero Voltage Turn-On -10: Instantaneous Turn-On
2WD						
48						
25						
K						
P						
G						
H						
-10						

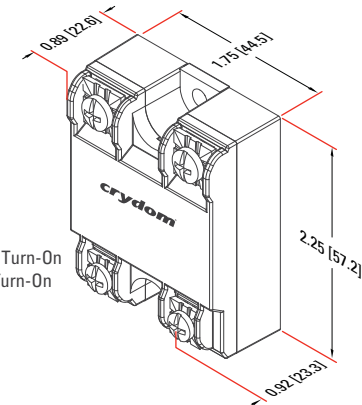


CW Series • 10-125 Amps




- Heavy duty Solid State Relay with ratings from 10 to 125 Amps @ 24-280 VAC or 48-660 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- EMC compliant (LEVEL 3) for reliable operation in harsh electrical environments
- Flexible 3-32 VDC, 18-36 VAC or 90-280 VAC Control Voltage and universal AC/DC control of 20-280 VAC and 20-48 VDC

- LED indicator for easy identification of control status
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- IP20 "touch safe" Cover provides additional user protection
- Elective Internal TVS ("P" suffix) eliminates the need for external Overvoltage Protection
- A pre-attached Thermal Pad can be ordered to eliminate the need for thermal compound using the "H" suffix
- UL 508 overload endurance rated and 100 kA Short Circuit Current Rating (SCCR)



Notes: **A B C D J K**



Assemblies
Page 71



Compatible
Accessories
Page 73

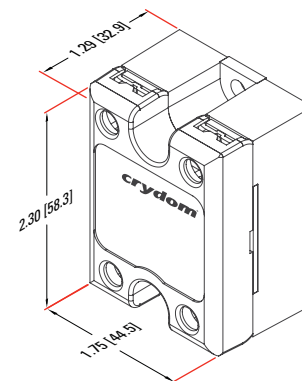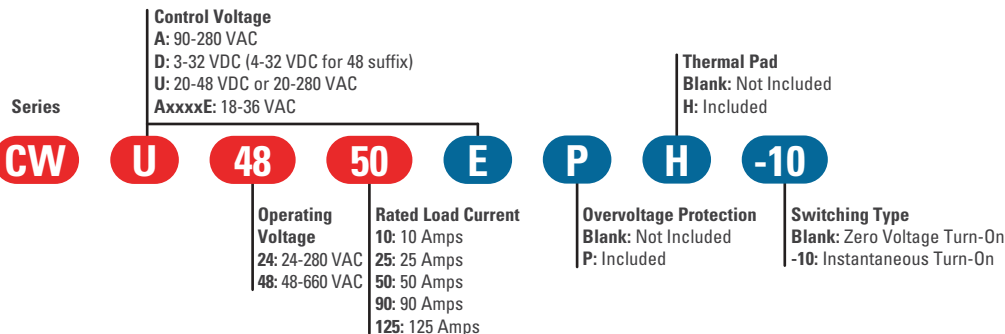


CSW Series • 10-90 Amps




- Heavy duty Solid State Relay with ratings from 10 to 90 Amps @ 24-280 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- EMC compliant (LEVEL 3) for reliable operation in harsh electrical environments
- Flexible 3-32 VDC Control Voltage
- Low output off-state leakage current (without option "S")
- Elective R-C Snubber network for additional dv/dt attenuation (option "S")
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase-control or inductive loads) output
- Elective Internal TVS ("P" suffix) eliminates the need for external Overvoltage Protection
- A pre-attached Thermal Pad can be ordered to eliminate the need for thermal compound using the "H" suffix
- UL 508 overload endurance rated and 100 kA Short Circuit Current Rating (SCCR)

Notes: **A B C D J K**




Assemblies
Page 71



Compatible
Accessories
Page 73

Series	Operating Voltage 24: 24-280 VAC	Rated Load Current 10: 10 Amp 25: 25 Amp 50: 50 Amp 75: 75 Amp 90: 90 Amp	Termination Blank: Screw F: Quick Connect (Single pair [up to 25 Amp] Double pair [50 Amp]) K: Installed standoffs for PC Board mounting	Overvoltage Protection Blank: Not Included P: Included	Input Status LED Blank: Not Included G: Included	Snubber Blank: Not Included S: Included	Thermal Pad Blank: Not Included H: Included	Switching Type Blank: Zero Voltage Turn-On -10: Instantaneous Turn-On
CSW	24	10	K	P	G	S	H	-10

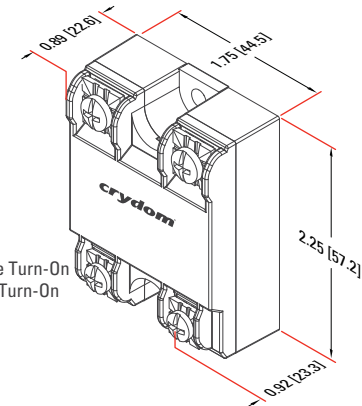

CL Series • 5-10 Amps



- Economical Solid State Relay with ratings of 5 or 10 Amps @ 24-280 VAC
- Optional IP20 "touch safe" Cover for additional user protection
- Economical Triac based construction
- LED indicator for easy identification of control status
- Regulated AC or DC Control Voltage
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output


Notes: **A B C D J K**



Assemblies
Page 71



Compatible
Accessories
Page 73

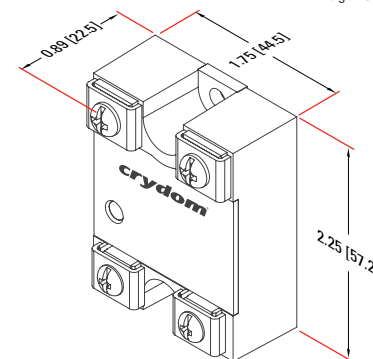

Series

CL

240

Load Voltage
240: 24-280 VAC

A

Control Voltage
A: 90-250 VAC
D: 3-32 VDC

10

Rated Load Current
05: 5 Amps
10: 10 Amps

R

Switching Type
Blank: Zero Voltage
Turn-On
R: Instantaneous Turn-On

C

Cover
Blank: Not Included (IP00)
C: Included (IP20)

H


Thermal Pad
Blank: Not Included
H: Included

EL Series • 5-20 Amps




- Mini-puck Solid State Relay to maximize panel space
- Ratings up to 20 Amps @ 24-280 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- Quick Connect control & output termination for easy installation
- 3.75k VAC optical isolation


Notes: **A B C D J K**



Assemblies
Page 71



Thermal Pad
Page 83

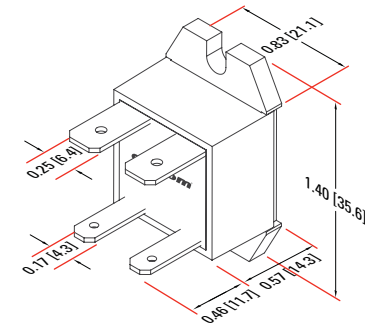

Series

EL

240A

5

R

05

Output Voltage
240 A: 24-280 VAC

Rated Load Current
5: 5 Amps
10: 10 Amps
20: 20 Amps

Control Voltage
05: 4-8 VDC
12: 10-14 VDC
24: 21-27 VDC



Switching Type
Blank: Zero Voltage Turn-On
R: Instantaneous Turn-On

EZ Series • 5-18 Amps



- Low profile Solid State Relay
- Ratings from 5 to 18 Amps @ 24-280 VAC or 48-660 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Elective R-C Snubber network (240 VAC models) for additional dv/dt attenuation
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- AC or DC Control Voltage options
- Quick Connect control & output termination for easy installation

Notes: **A B C D J K**

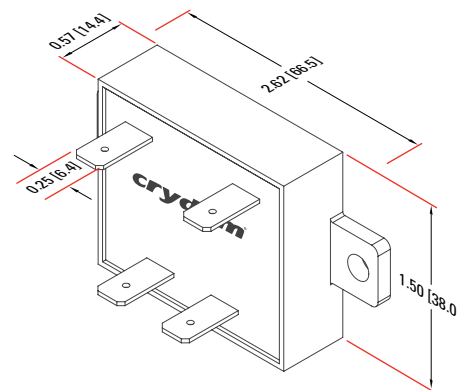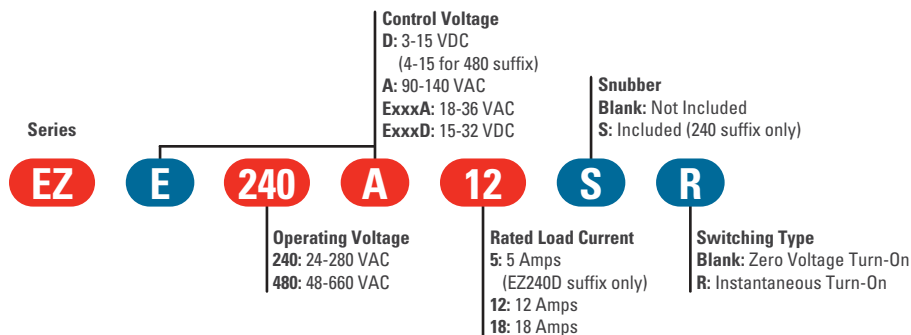

MCBC Series • 25-90 Amps




- Microprocessor based burst fire controller / SSR
- Ratings from 25 to 90 Amps @ 48-530 VAC
- R-C Snubber network for additional dv/dt attenuation
- Industry standard analogue input (voltage or current) or potentiometer control
- LED indicator for easy identification of output status
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Two time-base periods available (10 & 20 cycles)
- Designed to provide proportional AC power to a wide range of resistive loads

Notes: **A B D J K**



Assemblies
Page 71



Protective Cover
Page 74

Series

MC

BC

24

25

C

F

Line Voltage

12: 48-140 VAC
24: 180-280 VAC
48: 300-530 VAC

Analog Control Signal

A: 0-5 VDC
B: 0-7 VDC
C: 0-10 VDC
D: 4-20 mA
E: Internal Potentiometer

Product Type


BC: Burst Fire Controller

Rated Load Current

25: 25 Amps
50: 50 Amps
90: 90 Amps

Time Base Period

F: 10 AC Cycles
L: 20 AC Cycles

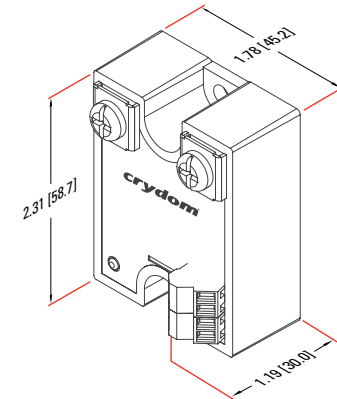

MCPC Series • 25-90 Amps



- Microprocessor based phase angle controller / SSR
- Ratings from 25 to 90 Amps @ 48-530 VAC
- R-C Snubber network for additional dv/dt attenuation
- Industry standard analogue input (voltage or current) or potentiometer control for setpoint
- LED indicator for easy identification of output status
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Designed to provide proportional AC power to a wide range of resistive loads

Notes: **A B D J K**



Assemblies
Page 71



Protective Cover
Page 74

Series

MC PC 24 25 C

Line Voltage

12: 48-140 VAC
24: 180-280 VAC
48: 300-530 VAC

Analog Control Signal


A: 0-5 VDC
B: 0-7 VDC
C: 0-10 VDC
D: 4-20 mA
E: Internal Potentiometer

Product Type

PC: Phase-Angle Controller

Rated Load Current

25: 25 Amps
50: 50 Amps
90: 90 Amps

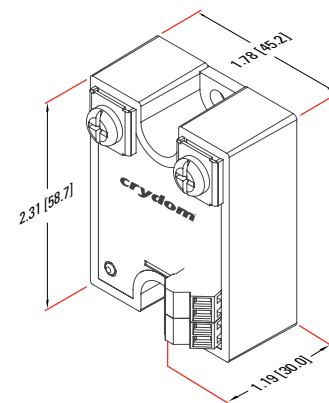

Specifications are subject to change without prior notice


PCV Series • 15-90 Amps




- Easy to use proportional (phase angle) controller
- Ratings from 15 to 90 Amps @ 100-240 VAC
- Simple 2-7 VDC or 2-10 VDC analogue Control Voltage
- Designed to provide proportional AC power to a wide range of resistive loads

Notes: **A B D J K**


Series		Operating Voltage 24: 100-240 VAC	
10	PCV	24	25
Control Voltage 7: 2-7 VDC 10: 2-10 VDC		Rated Load Current 15: 15 Amps 25: 25 Amps 50: 50 Amps (10 prefix only) 75: 75 Amps (10 prefix only) 90: 90 Amps (10 prefix only)	



Assemblies
Page 71



Compatible
Accessories
Page 73

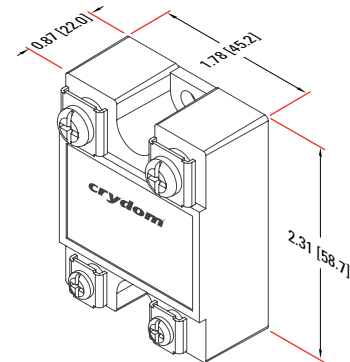


LPCV Series • 15-110 Amps



- Easy to use linear proportional (phase angle) controller
- Ratings from 15 to 110 Amps @ 20-300 VAC
- Simple 0-5 VDC, 0-10 VDC or 4-20 mAmps analogue Control Voltage
- Included 12 VDC source for use with external potentiometer control
- Requires accessory power supply PS120 or PS240 to provide 20 VAC for internal logic circuit
- Designed to provide proportional AC power to a wide range of resistive loads

Notes: **A B D J K**



Compatible
Accessories
Page 81

Series

10

LPCV


24

25

Control Voltage
5: 0-5 VDC
10: 0-10 VDC
20: 4-20 mAmps

Operating Voltage
24: 20-300 VAC

Rated Load Current
15: 15 Amps
25: 25 Amps
40: 40 Amps
75: 75 Amps
110: 110 Amps

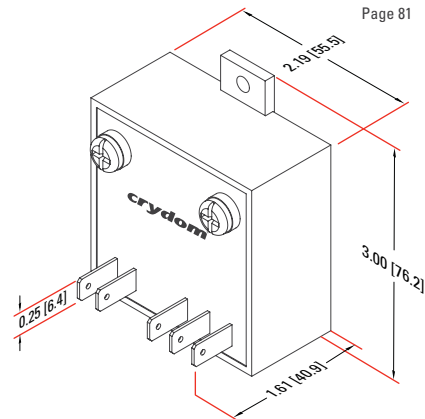

Specifications are subject to change without prior notice

SMR-6 Series • 25-90 Amps



Panel Mount


AC

Accessories • Assemblies • Plug-In Mount • DIN Rail Mount • PCB Mount




- Solid State Relay with built-in current monitoring & diagnostics circuit
- Ratings from 25 to 90 Amps @ 60-280 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Inverting or non-inverting Control Voltage (flexible 8-32 VDC)
- Normally Open or Normally Closed alarm output
- Wide range of built-in fault condition monitoring alarms
- Zero Voltage Turn-On (resistive loads) output
- UL 508 overload endurance rated


Notes: **A B D J K**



Assemblies
Page 71



Protective Cover
Page 74

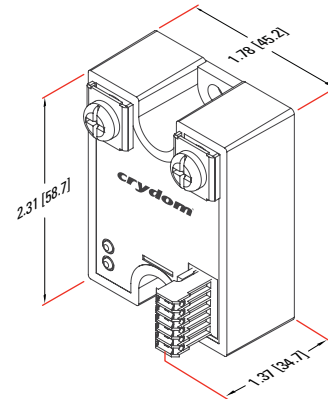

Series

SMR

24

25

-6

Rated Load Current

25: 25 Amps

50: 50 Amps

90: 90 Amps

Operating Voltage

24: 60-280 VAC

48: 96-553 VAC

Features

Input: Inverting or Non Inverting

Alarm Output: Normally Open or Normally Closed


Evolution Dual Series • 25-50 Amps



- Independently controlled dual output Solid State Relay
- Ratings of 25 & 50 Amps @ 24-280 VAC or 48-600 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Optional IP20 "touch safe" Cover for additional user protection
- Flexible 4-32 VDC Control Voltage
- Three Input Connector options for additional assembly flexibility
- LED indicator for each output channel for easy identification of control status
- Zero Voltage Turn-On (resistive loads) output


Notes: **A B C D J K**

Input Connector options



Series	Operating Voltage 24: 24-280 VAC 48: 48-660 VAC	Control Voltage W: 4-32 VDC	Output Terminal Orientation U: A channel top, B channel bottom V: A channel on left, B channel on right
C			
D			
24			
25			
W			
2			
V			
H			
Cover C: Included D: Not Included	Rated Load Current 25: 25 Amps 50: 50 Amps	Input Connector 2: Key Locking Connector 3: 4 Pin Connector accepting Screw Terminals 4: 4 Pin Spring Terminal *	Thermal Pad Blank: Not Included H: Included

* Drawing shown on the right

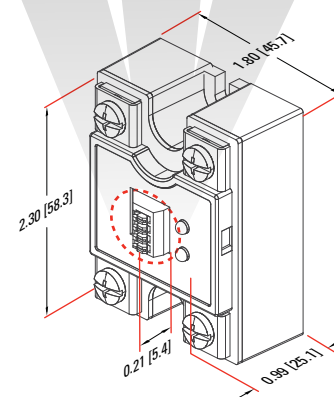


Specifications are subject to change without prior notice

Series 1 Duals • 25-40 Amps




- Independently controlled dual output Solid State Relay
- Ratings of 25 Amps & 40 Amps @ 24-280 VAC or 48-530 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- 4-15 VDC or 15-32 VDC Control Voltage
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- Quick Connect termination; 120/240 V models (D24) include pin control termination
- UL 508 overload endurance rated


Notes: **A B C D J K**




120/240 V Model
(D24)



480 V Model
(H12D48)




Assemblies
Page 71



Heat Sinks &
other Accessories
Page 75

Series	Rated Load Current 25: 25 Amps 40: 40 Amps	Thermal Pad Blank: Not Included H: Included
H12D48	25	H
Operating Voltage D24: 24-280 VAC H12D48: 48-530 VAC	D	-10
	Control Voltage D: 4-15 VDC DE: 15-32 VDC	Switching Type Blank: Zero Voltage Turn-On -10: Instantaneous Turn-On

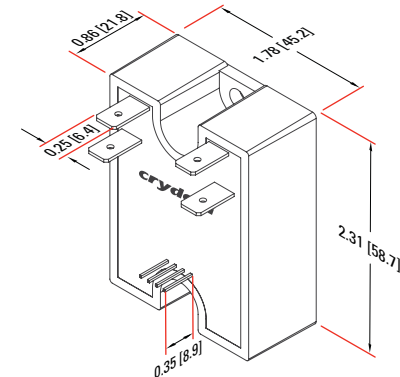


53TP Series • 25-50 Amps




- 3 Phase Solid State Contactor with ratings of 25 & 50 Amps per phase @ 48-530 VAC
- Up to 7.5 HP / 5.5 kW Motor Controller ratings
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- EMC compliant (LEVEL 3) for reliable operation in harsh electrical environments
- Direct Bond Copper (DBC) substrate for superior thermal performance
- R-C Snubber network for additional dv/dt attenuation
- Flexible 4-32 VDC, 18-36 VAC or 90-140 VAC / 180-280 VAC Control Voltage
- LED indicator for easy identification of control status
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- Optional IP20 "touch safe" Cover (shown) provides additional user protection
- Internal TVS eliminates the need for external Overvoltage Protection
- A pre-attached Thermal Pad can be ordered to eliminate the need for thermal compound using the "H" suffix
- UL 508 overload endurance rated

Notes: **A B C D J K**





Assemblies
Page 71



Heat Sinks &
other Accessories
Page 78

Series		Rated Load Current	Thermal Pad
		25: 25 Amps 50: 50 Amps	Blank: Not Included H: Included
A	53TP	25	D
		Control Voltage	Switching Type
		A: 90-280 VAC (without IP20 cover)	Blank: Zero Voltage Turn-On
		B: 90-140 VAC (with IP20 cover)	-10: Instantaneous Turn-On
		C: 180-280 VAC (with IP20 cover)	
		D: 4-32 VDC	
		E: 18-36 VAC (with IP20 cover)	
		Cover	
		D: Not Included (IP00)	
		C: Included (IP20)	



53RV Series • 25-50 Amps




- Motor Reversing Contactor with ratings of 25 & 50 Amps per phase @ 48-530 VAC
- Up to 7.5 HP / 5.5 kW Motor Controller ratings
- Built-in interlock circuit protects the relay/load if both Forward & Reverse inputs are simultaneously actuated
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- EMC compliant (LEVEL 3) for reliable operation in harsh electrical environments
- Direct Bond Copper (DBC) substrate for superior thermal performance
- R-C Snubber network for additional dv/dt attenuation
- Flexible 4-32 VDC Control Voltage
- LED indicators for easy identification of the Forward / Reverse control status
- IP20 "touch safe" Cover provides additional user protection
- A pre-attached Thermal Pad can be ordered to eliminate the need for thermal compound using the "H" suffix
- UL 508 overload endurance rated

Notes: **A B C D J K**




Assemblies
Page 71



Heat Sinks &
other Accessories
Page 78

D	53	RV	25	C	H
Control Voltage D: 4-32 VDC	Series	Type RV: 3 Phase Motor Reversing SSR	Rated Load Current/phase 25: 25 Amps 50: 50 Amps	Cover C: Included	Thermal Pad Blank: Not Included H: Included

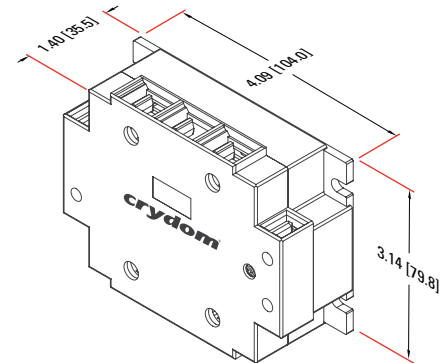


DC60 Series • 3-7 Amps




- Economical bipolar transistor output Solid State Relay
- Ratings up to 7 Amps @ 60 VDC
- Available with either a Normally Open (standard) or Normally Closed ("-B" option) output
- Flexible 3.5-32 VDC or 90-280 VAC/DC Control Voltage
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)

Notes: **A B C D J K**



Assemblies
Page 71



Compatible
Accessories
Page 73

Series

DC60

Control Voltage
S: 3.5-32 VDC
SA: 90-280 VAC/DC


SA

3

Rated Load Current
3: 3 Amps
5: 5 Amps
7: 7 Amps

Output Type
Blank: Normally Open
-B: Normally Closed

-B

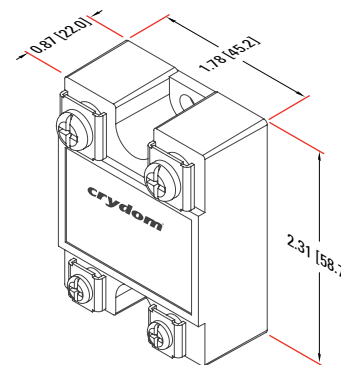

Specifications are subject to change without prior notice


D06D Series • 60-100 Amps




- Solid State Relay with low impedance MOSFET output to minimize total power dissipation
- Ratings from 60 to 100 Amps @ 60 VDC
- Easily paralleled for high current applications
- Flexible 3.5-32 VDC Control Voltage
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)

Notes: **A B D J K**


Series	Operating Voltage
D	06D: 0-60 VDC
06D	
60	
	Rated Load Current
	60: 60 Amps
	80: 80 Amps
	100: 100 Amps



Assemblies
Page 71



Compatible
Accessories
Page 73

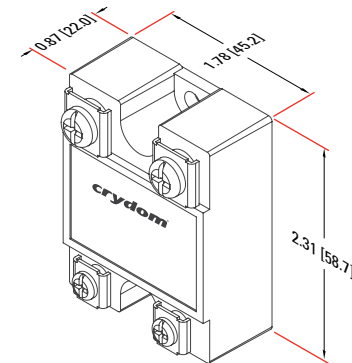


PowerPlus DC Series • 10-100 Amps




- Solid State Relay with ratings up to 100 Amps @ 60 VDC, 100 Amps @ 100 VDC, 60 Amps @ 200 VDC and 20 Amps @ 400 VDC
- Flexible 4-32 VDC or 90-140 VAC Control Voltage
- Optional IP20 "touch safe" Cover for additional user protection (option "C") & thermal interface pad (option "H")
- Optically isolated high speed trigger circuit for enhanced switching
- Easily paralleled for high current applications
- Low impedance MOSFET output minimizes total power dissipation
- LED indicator for easy identification of control status
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)
- UL General Use (resistive) ratings


Notes: **A B C D J K**



Assemblies
Page 71



Compatible
Accessories
Page 73

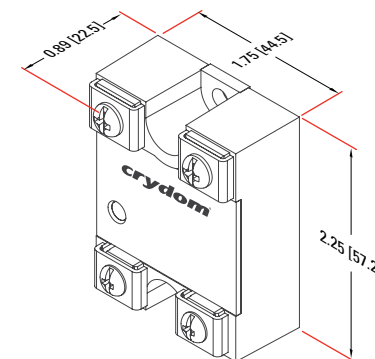

Series

DC

100

A

40

C

H

Control Voltage
A: 90-140 VAC
D: 4-32 VDC

Cover
Blank: Not Included
C: Included

Thermal Pad
Blank: Not Included
H: Included

Operating Voltage
60: 7-48 VDC
100: 7-72 VDC
200: 7-150 VDC
400: 7-300 VDC

Rated Load Current
10: 10 Amps
20: 20 Amps (Not valid with 400A suffix)
40: 40 Amps (Not valid with 400x suffixes)
60: 60 Amps (Not valid with 200A, 400x suffixes)
80: 80 Amps (60D & 100D suffixes only)
100: 100 Amps (60D & 100D suffixes only)

Series 1 DC • 7-100 Amps



- Solid State Relay with low impedance MOSFET output to minimize total power dissipation
- Ratings up to 100 Amps @ 100 VDC, 40 Amps @ 200 VDC, 12 Amps @ 400 VDC, and 10 Amps @ 500 VDC
- Easily paralleled for high current applications
- Flexible 3.5-32 VDC Control Voltage
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)

Notes: **A B D J K**

Series


D **1D** **07**

Operating Voltage


1D: 0-100 VDC
2D: 0-200 VDC
4D: 0-400 VDC
5D: 0-500 VDC

Rated Load Current


07: 7 Amps
10: 10 Amps (500 VDC only)
12: 12 Amps (not for 500 VDC)
20: 20 Amps (100 VDC only)
40: 40 Amps (100 & 200 VDC only)
60: 60 Amps (100 VDC only)
80: 80 Amps (100 VDC only)
100: 100 Amps (100 VDC only)



Assemblies
Page 71



Compatible
Accessories
Page 73

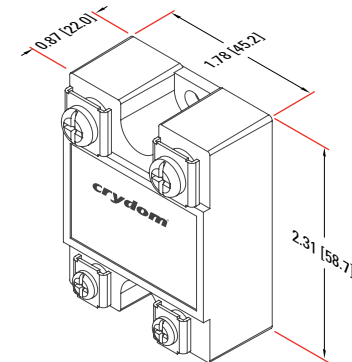


EL Series • 5-10 Amps



- Mini-puck Solid State Relay to maximize panel space
- Ratings of 5 & 10 Amps @ 3-100 VDC
- Easily paralleled for high current applications
- Low impedance MOSFET output minimizes total power dissipation
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)
- Quick Connect control & output termination for easy installation

Notes: **A B D J K**




Assemblies
Page 71



Thermal Pad
Page 83

Series	Rated Load Current	Control Voltage
EL	5: 5 Amps	05: 4-8 VDC
100D	10: 10 Amps	12: 10-14 VDC
5		24: 21-27 VDC
05		

Output Voltage
100D: 3-100 VDC

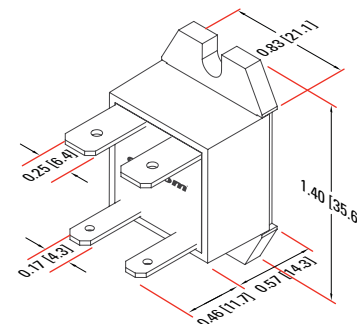


Specifications are subject to change without prior notice

SSC Series • 25 Amps




- Solid State Relay with ratings of 25 Amps @ up to 1k VDC
- High voltage IGBT output
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)


Notes: **A B D J K**



Assemblies
Page 71



Compatible
Accessories
Page 73

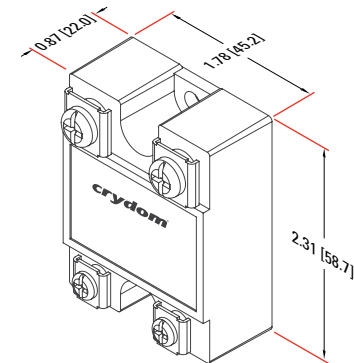

Series

SSC

1000

Operating Voltage
1000: 0-1000 VDC

25

Rated Load Current
25: 25 Amps

24


Control Voltage
12: 8-16 VDC
24: 20-28 VDC
36: 32-40 VDC

LVD Series • 40-100 Amps




- Low Voltage Disconnect with ratings up to 100 Amps @ 3-75 VDC
- Monitors and automatically disconnects battery systems from loads at low voltage conditions to prevent deep discharge of the batteries
- Low impedance MOSFET output minimizes total power dissipation
- Six DC control ranges available for a variety of 12 VDC and 24 VDC battery systems

Notes: **A B C D J K**



Assemblies
Page 71




Compatible
Accessories
Page 73

Series	Operating Voltage	Rated Load Current	Thermal Pad
LVD	75: 3-75 VDC	40: 40 Amps	Blank: Not Included
75		60: 60 Amps	H: Included
A		80: 80 Amps	
40		100: 100 Amps	
H			

Control Voltage Code

A: 36 VDC max., Hysteresis 11.0-11.5 VDC
B: 36 VDC max., Hysteresis 11.5-12.0 VDC
C: 36 VDC max., Hysteresis 12.0-12.5 VDC
D: 36 VDC max., Hysteresis 23.0-24.0 VDC
E: 36 VDC max., Hysteresis 24.0-25.0 VDC
F: 36 VDC max., Hysteresis 25.6-26.6 VDC

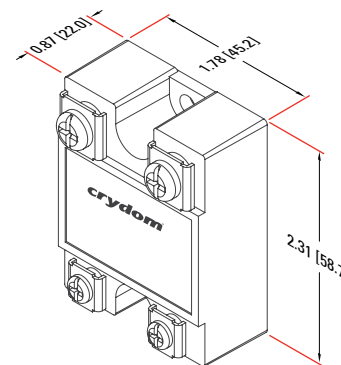

DP Series • 20-60 Amps




- Motor Reversing Contactor with ratings up to 60 Amps @ 48 VDC
- Low impedance MOSFET switches in an H-Bridge configuration for motor reversing
- Control features to combine Soft Start/Ramp Up, Soft Stop/Ramp Down & Braking functions on each polarity
- Built-in interlock circuit protects the relay/load if both Forward & Reverse inputs are simultaneously actuated
- UL & IEC General Use & Motor Controller ratings
- LED indicators for easy identification of the Forward / Reverse control status

Notes: **A B C D J K**




20 Amps
Model



40 & 60 Amps
Model



Assemblies
Page 71



Compatible
Accessories
Page 73

Series

DP

4R

Function
4R: 4 Channel DC Reversing

SB

Start Mode
Blank: Instant Start
SA: Soft Start/Ramp Up, 0.2 sec
SB: Soft Start/Ramp Up, 0.5 sec
SC: Soft Start/Ramp Up, 1 sec

60

Operating Voltage
60: 48 VDC

D

Control Voltage
D: 4.5-15 VDC
E: 18-32 VDC

40


Load Rated Current
20: 20 Amps
40: 40 Amps
60: 60 Amps

B

Stop Mode
Blank: Stop Mode matches Start Mode
B2: Dynamic Brake, 0.2 sec
B5: Dynamic Brake, 0.5 sec
B8: Dynamic Brake, 0.8 sec
B: Dynamic Brake, Continuous

H

Thermal Pad
Blank: Not Included
H: Included

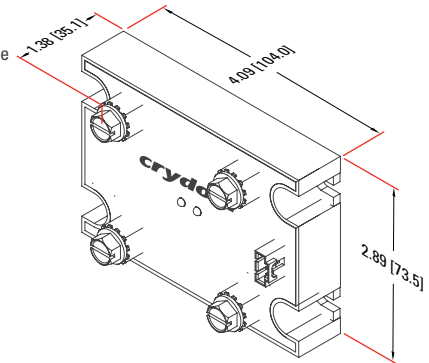

HDC Series • 120-160 Amps



- High current solid state contactor with rating up to 160 Amps @ 150 VDC
- Single Pole Single Throw Normally Open Operation (SPST/N.O.)
- Flexible 4.5-32 VDC or 90-140 VAC Control Voltage
- Low impedance MOSFET output minimizes total power dissipation
- LED Input Status indicator standard
- 5/16 inch diameter output terminal studs for large diameter wires and lugs
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)
- A pre-attached Thermal Pad can be ordered to eliminate the need for thermal compound using the "H" suffix
- UL 508 overload endurance rated

Notes: **A B C D J K**




Assemblies
Page 71



Heat Sinks &
other Accessories
Page 78

Series	Control Voltage	Thermal Pad
HDC	A: 90-140 VAC D: 4.5-32 VDC	Blank: Not Included H: Included
100	Operating Voltage 60: 7-48 VDC 100: 7-72 VDC 200: 7-150 VDC	Rated Load Current 120: 120 Amps 160: 160 Amps
A		
120		
H		

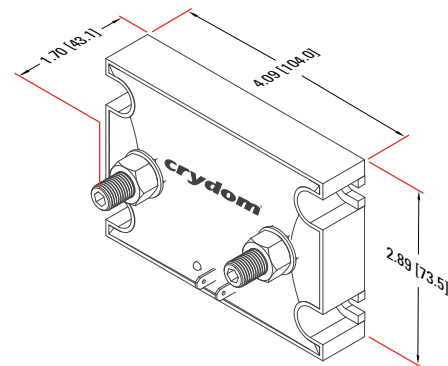

PCB Mount

Crydom offers an extensive line of PCB Mount Solid State Relays including the **popular industry standard footprint SIP, Mini SIP and DIP configurations** and most Crydom SIP type SSRs are also offered as DIN Rail mountable Assemblies.

Models are available for applications requiring ratings from **1 to 25 Amps at 24 to 660 VAC** or **1 to 20 Amps at 1 to 200 VDC**. Inputs are available covering 24 to 140 VAC or 3 to 32 VDC depending upon model. Excepting some AC output models rated greater than 10 Amps where forced air is used for improved output ratings (forced air is not required for DC output), all Crydom PCB Mount Relay output ratings are based upon free air and 40 °C ambient.

See the product pages for a summary of **available package size and pin out, ratings, features and Safety Agency approvals**. Visit the SSR Assemblies section of the catalog or the Crydom website for additional information on Crydom PCB Mount SSRs and Assemblies.

AC Output

AC Output			Rating Amps										
Page	Series	Description	1	1.5	2	3	4	5	8	12	25	Solid State Relays	
36	ASO	Mini SIP		■	■								
37	MP	SIP				■	■						
38	CX	SIP						■					
39	MCX	SIP						■					
40	LS	SIP							■	■			
41	PF	SIP										■	
42	DPA	DIP		■									
43	SDV	DIP			■								

DC Output

DC Output			Rating Amps				
Page	Series	Description	3	5	6	10	20
Solid State Relays							
44	DMO	Mini SIP	■				
45	CMX	SIP	■	■	■	■	■
46	MP	SIP	■				



ASO Series • 1.5-2 Amps



- Compact design Solid State Relay ideally suited for high density PCB applications
- Ratings up to 2 Amps @ 12-280 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- Solderable 0.015" x 0.030" [0.4 mm x 0.8 mm] pins can also plug fit SIP type IC socket

Notes: **A B C D J**

Series


Rated Load Current
241: 1.5 Amps
242: 2 Amps

ASO

241

R

Switching Type
Blank: Zero Voltage Turn-On
R: Instantaneous Turn-On

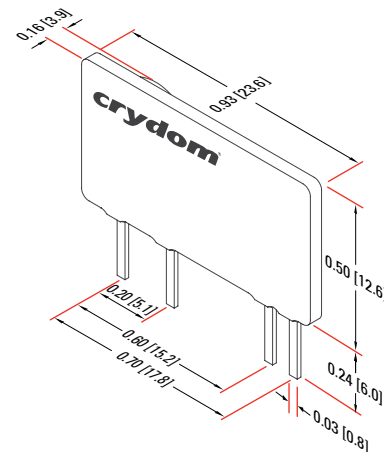


MP Series • 3-4 Amps



- SIP Solid State Relay ideally suited for high density PCB applications
- Ratings up to 4 Amps @ 24-280 VAC
- Control Voltage of 3-32 VDC
- 10 mm plastic housing allows for operation at -40°C

Notes: **A B D J**

Series	Operating Voltage	Rated Load Current
MP	120: 12-140 VAC	3: 3 Amps
240	240: 24-280 VAC	4: 4 Amps (240 suffix only)
D		
3	Control Voltage D: 3-32 VDC	

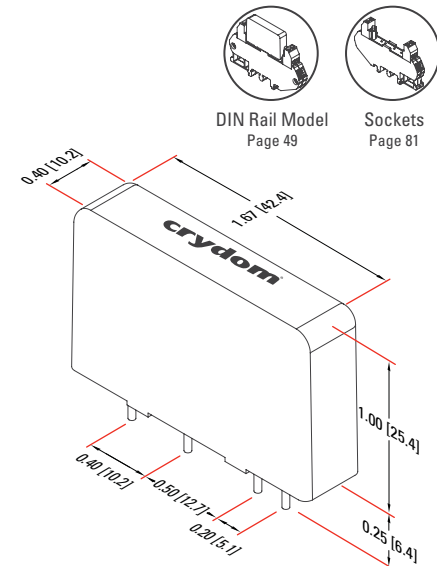

DIN Rail Model
Page 49


Sockets
Page 81

CX Series • 5 Amps



- SIP Solid State Relay ideally suited for high density PCB applications
- Ratings up to 5 Amps @ 48-660 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- High surge current rating
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- AC or DC Control Voltage options
- UL 508 overload endurance rated

Notes: **A B C D J**

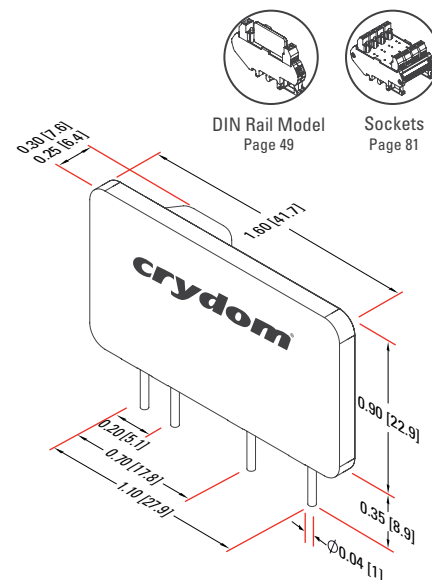

Series

CX

E

240

D

5

R

Operating Voltage

240: 12-280 VAC

380: 48-530 VAC

480: 48-660 VAC

Rated Load Current

5: 5 Amps

Control Voltage

Blank: 3-15 VDC

(240 & D suffix only)

4-15 VDC

(380/480 & D suffix only)

90-140 VAC (A suffix only)

E: 15-32 VDC (D suffix only)

18-36 VAC (A suffix only)

Control Input Type

D: DC Input

A: AC Input

Switching Type

Blank: Zero Voltage Turn-On

R: Instantaneous Turn-On


MCX Series • 5 Amps



- SIP Solid State Relay ideally suited for high density PCB applications
- Ratings up to 5 Amps @ 48-660 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- High surge current rating
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- AC or DC Control Voltage options
- 10 mm plastic housing allows for operation at -40°C

Notes: **A B C D J**

Series	Control Voltage	Control Input Type	Switching Type
MCX	Blank: 3-15 VDC (240 & D suffix only) 4-15 VDC (380/480 & D suffix only)	D: DC Input A: AC Input	Blank: Zero Voltage Turn-On R: Instantaneous Turn-On
E	E: 15-32 VDC (D suffix only) 18-36 VAC (A suffix only)		
240	Operating Voltage 240: 12-280 VAC 380: 48-530 VAC 480: 48-660 VAC		
D			
5		Rated Load Current 5: 5 Amps	
R			

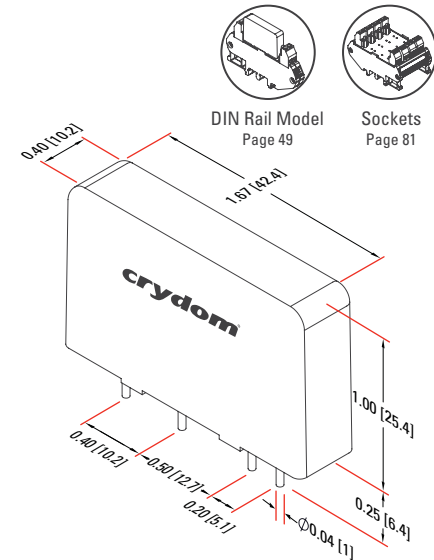

LS Series • 8-12 Amps



- SIP Solid State Relay ideally suited for high density PCB applications
- Ratings up to 12 Amps @ 24-280 VAC with external heat sink
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output

Notes: **A** **B** **C** **D** **J**

Series

LS

E

240

D

12

R


Operating Voltage
240: 24-280 VAC

Control Voltage
Blank: 4-10 VDC
E: 20-28 VDC

Control Input Type
D: DC Input

Rated Load Current
8: 8 Amps
12: 12 Amps

Switching Type
Blank: Zero Voltage Turn-On
R: Instantaneous Turn-On

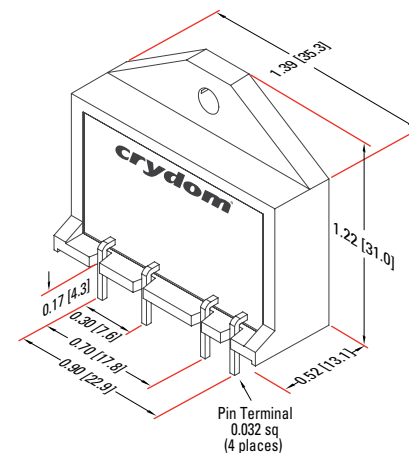

PF Series • 25 Amps




- SIP Solid State Relay ideally suited for high density PCB applications
- Ratings up to 10 Amps (convection) or 25 Amps (forced air flow) @ 48-660 VAC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output

• AC or DC Control Voltage options

Notes: **A B C D J**

Series	Operating Voltage	Rated Load Current
PF	240: 12-280 VAC 380: 48-530 VAC 480: 48-660 VAC	25: 25 Amps
E	Control Voltage Blank: 3-15 VDC (240 & D suffix only) 4-15 VDC (380/480 D suffix only) 90-140 VAC (A suffix only)	
240		
D	Control Input Type D: DC Input A: AC Input	
25		
R	Switching Type Blank: Zero Voltage Turn-On R: Instantaneous Turn-On	

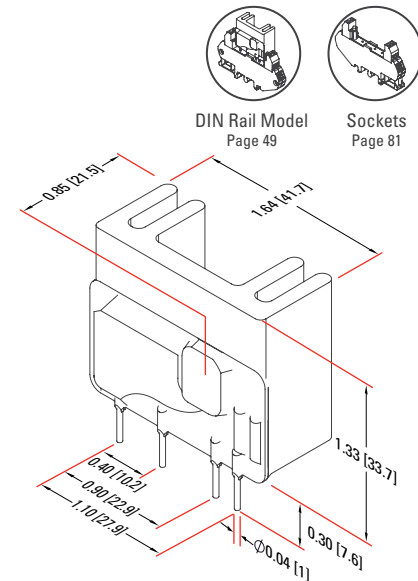

DIN Rail Model
Page 49

Sockets
Page 81

DPA Series • 1 Amp



- DIP Solid State Relay ideally suited for high density PCB applications
- Ratings to 1 Amp @ 280 VAC
- Control options include 3.5-10 VDC or 10-35 mAmps DC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Solderable Pin layout fits IC grid pattern and pluggable IC DIP type sockets

Notes: **A B D J**

Series


DPA

41

19

Operating Voltage
41: 20-140 VAC
61: 20-280 VAC

Control Voltage
11: 10-35 mA DC
19: 3.5-10 VDC

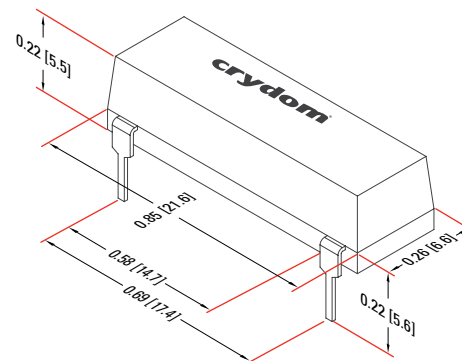


SDV Series • 1.5 Amps



- DIP Solid State Relay ideally suited for high density PCB applications
- Ratings to 1.5 Amps @ 280 VAC
- Control Voltage of 3.5-10 VDC
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- Solderable Pin layout fits IC grid pattern and pluggable IC DIP type sockets

Notes: **A B C D J**

Series	Operating Voltage	Switching Type
SDV	24: 12-280 VAC	Blank: Zero Voltage Turn-On
24		R: Instantaneous Turn-On
15	Rated Load Current	
R	15: 1.5 Amps	

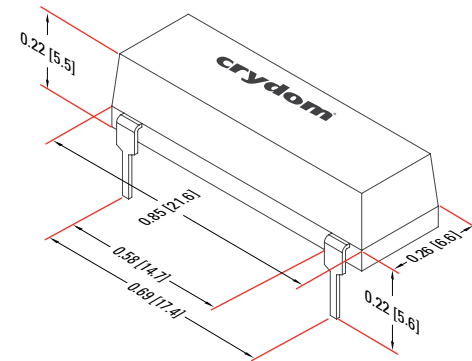

DMO Series • 3 Amps



- Compact design Solid State Relay ideally suited for high density PCB applications
- Ratings up to 3 Amps @ 60 VDC
- 3-10 VDC Control Voltage
- Low impedance MOSFET output minimizes total power dissipation
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)
- Solderable 0.015" x 0.030" [0.4 mm x 0.8 mm] pins can also plug fit SIP type IC socket
- Easily paralleled for high current applications


Notes: **A B D J**

Series

Rated Load Current
063: 3 Amps

DMO

063

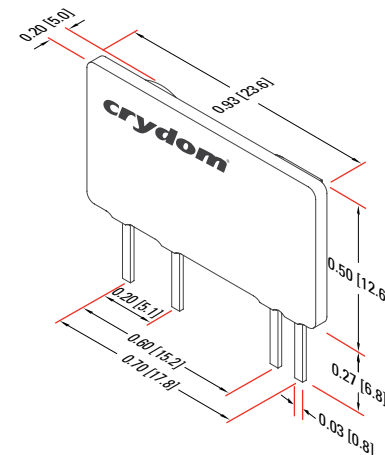

Specifications are subject to change without prior notice


CMX Series • 3-20 Amps



- SIP Solid State Relay ideally suited for high density PCB applications
- Low impedance MOSFET output minimizes total power dissipation
- Ratings up to 20 Amps @ 60 VDC, 10 Amps @ 100 VDC or 3 Amps @ 200 VDC
- Easily paralleled for high current applications
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)

Notes: **A B C D J**

Series		Operating Voltage		Rated Load Current
CMX	E	60: 0-60 VDC 100: 0-100 VDC 200: 0-200 VDC	D	3: 3 Amps (200 VDC only) 5: 5 Amps (60 VDC only) 6: 6 Amps (100 VDC only) 10: 10 Amps (60 & 100 VDC only) 20: 20 Amps (60 VDC only)
		Control Voltage Blank: 3-10 VDC E: 20-28 VDC		Control Input Type D: DC Input

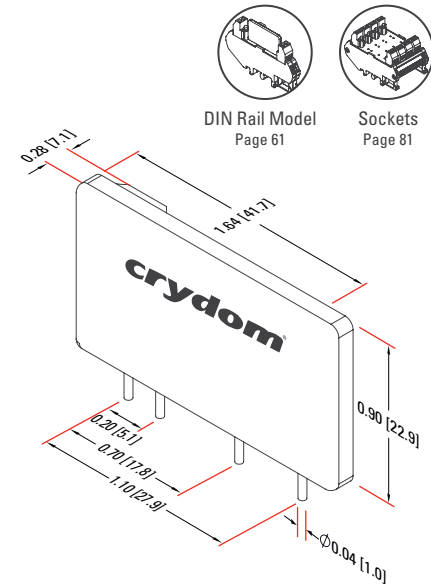


MP Series • 3 Amps



- SIP Solid State Relay ideally suited for high density PCB applications
- Ratings up to 3 Amps @ 60 VDC
- 10 mm plastic housing allows for operation at -40°C
- Normally Closed version available ("-B" suffix option)
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)



Notes: **A B C D J**



DIN Rail Model
Page 61



Sockets
Page 81

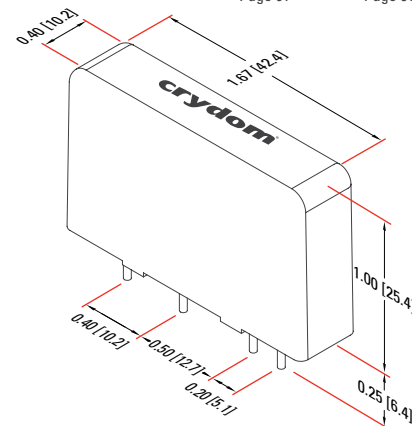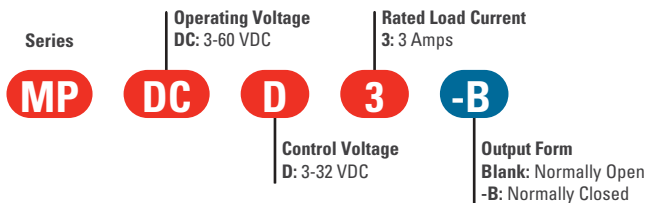

Specifications are subject to change without prior notice

DIN Rail Mount

Crydom DIN Rail Mounted Solid State Relays and Contactors are available with single, dual and 3 phase outputs. Industry standard 22.5 mm and 45 mm single phase packages are available from **10 to 65 Amps**. Slim 6 to 18 mm high power density packages are available from **0.1 to 12 Amps** for space restricted panels. Inputs cover the range of **24 to 280 VAC or 3 to 32 VDC** and feature LED input status indicator.

Crydom DIN Rail mounted SSRs and Contactors are “ready-to-use” and carry Safety Agency approvals as noted on each catalog sheet. Visit the DIN Rail SSR and Contactors section of the catalog or Crydom website for additional information on Crydom DIN Rail Mount SSRs and Contactors.



AC Output

[illegible]

DC Output

DC Output			Rating Amps									
Page	Series	Description	0.1	3	3.5	5	6	8	10	12	20	30
Solid State Relays												
60	DRA-CN	6 mm	■		■		■			■		
61	DRA	10/54 mm		■		■	■	■	■			
62	SeriesOne DR	11/18 mm		■			■			■		
63	CKM	22.5 mm								■		■ ■
Solid State Relay Timers												
64	SeriesOne DR Timer	Timer					■					
Solid State Contactors												
65	DRA4D	Reversing					■			■		

DRA-CN Series • 2 Amps




- Thin 6.2 mm DIN Rail mount Solid State Relay
- Replaceable CN Series SSR with ratings of 2 Amps @ 240 VAC
- LED indicator for easy identification of control status
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output

Notes: **A B C D J**



Plug-In Mount
Relays
Page 67



ID Marker Strips
Page 80

Series

DRA-CN

Operating Voltage

240A

240A: 24-250 VAC, 2 Amps


24

Assembly Input Voltage
05: 3-12 VDC
24: 15-30 VDC

R

Switching Type

Blank: Zero Voltage Turn-On
R: Instantaneous Turn-On

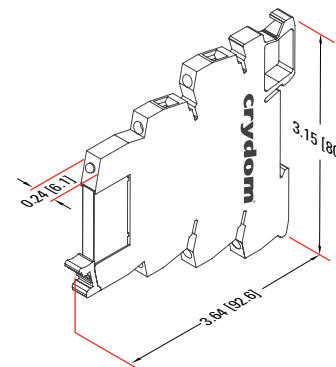


Specifications are subject to change without prior notice

DRA Series • 3-10 Amps



- Ready-to-use DIN Rail mountable Solid State Relays assemblies using standard Crydom SIP SSRs
- Slim 10 mm (single channel) & 54 mm (four channels) packages
- Ratings from 3 to 10 Amps
- Operating Voltage of 12-380 VAC with back-to-back SCR output for added reliability in commercial and heavy industrial applications
- Fits standard 35 mm DIN Rail profiles
- Cage style screw termination for easy and reliable wire connection
- AC & DC Control Voltage versions available depending upon selected SSR
- Available with Normally Closed output
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (inductive loads) output
- LED indicator for easy identification of control status

Notes: **A B D H J**



PCB Mount Relays
Page 35

Series

DRA

1


CXE240D5

Number of Channels


1: One N.O. Channel

4: Four N.O. Channels

Standard Crydom SSR p/n
including the following series:
CX/CXE
MCX/MCXE
MP (One Channel only)
PF (One Channel only)

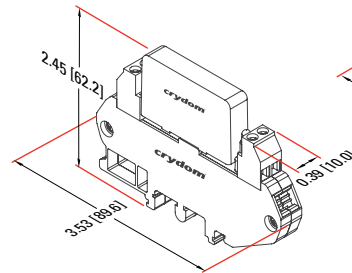

DRA1 with MP Series SSR
(One channel)

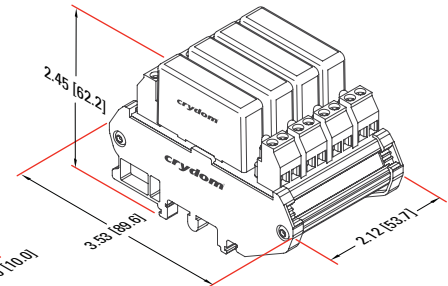

DRA4 with MP Series SSR
(Four channels)

SeriesOne DR • 3-12 Amps




- DIN Rail mount 11 mm (3 & 6 Amps) or 18 mm (12 Amps) wide Solid State Relay
- Operating Voltage of 24-280 VAC and 48-600 VAC
- Fits standard 35 mm DIN Rail profiles
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Flexible Control Voltage of 4-32 VDC, 18-36 VAC, 90-140 VAC, 200-265 VAC
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (inductive loads) output
- IP20 housing for greater safety
- LED indicator for easy identification of control status
- UL & cUL listed
- UL 508 overload endurance rated

Notes: **A** **B** **C** **D** **J**



ID Marker Strips
Page 80

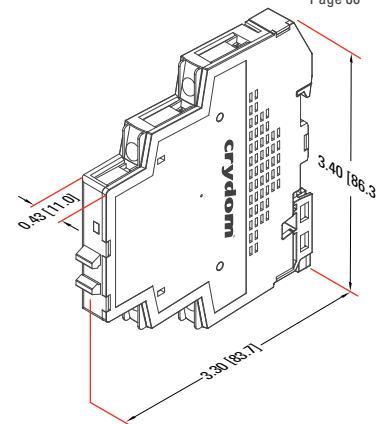

Series

DR

24

A

12

R

Operating Voltage
24: 24-280 VAC
48: 48-600 VAC

Rated Load Current
03: 3 Amps*
06: 6 Amps*
12: 12 Amps

Control Voltage
A: 200-265 VAC
B: 90-140 VAC
D: 4-32 VDC
E: 18-36 VAC

Switching Type
Blank: Zero Voltage Turn-On
R: Instantaneous Turn-On
(D suffix only)



* Drawing shown on the right

CKR Series • 10-30 Amps



- Solid State Relay with ratings from 10 to 30 Amps
- Operating Voltage of 24-660 VAC
- Fits standard 35 mm DIN Rail profiles
- Slim 22.5 mm (width) package
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Flexible Control Voltage of 4-32 VDC, 18-36 VAC, 90-140 VAC, 110-280 VAC
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (inductive loads) output
- LED indicator for easy identification of control status
- Elective Internal TVS ("P" suffix) eliminates the need for external Overvoltage Protection
- Enhanced surge current ratings for the 30 Amps (facilitates the use of circuit breakers instead of fuse protection)

Notes: **A** **B** **C** **D** **J**

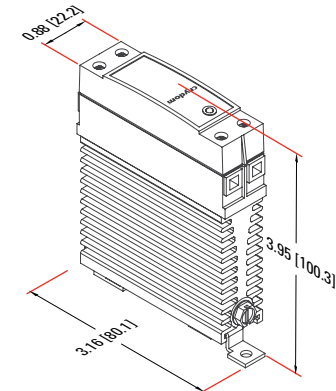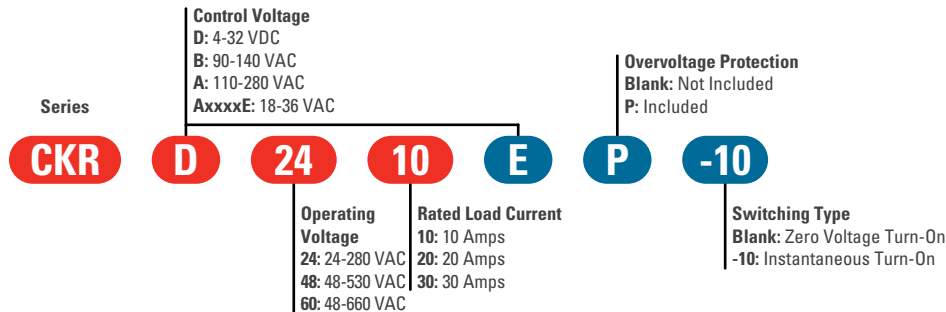


CMR Series • 35-65 Amps



- Solid State Relay with ratings from 35 to 65 Amps
- Operating Voltage of 24-660 VAC
- Fits standard 35 mm DIN Rail profiles
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Flexible Control Voltage of 4-32 VDC, 18-36 VAC, 90-140 VAC
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (inductive loads) output
- LED indicator for easy identification of control status
- Elective Internal TVS ("P" suffix) eliminates the need for external Overvoltage Protection

Notes: **A B C D J**

Series	Control Voltage				Overvoltage Protection	
	D: 4-32 VDC	A: 90-140 VAC	AxxxxE: 18-36 VAC		Blank: Not Included	P: Included
CMR	A	24	35	E	P	-10
		Operating Voltage		Rated Load Current		
		24: 24-280 VAC	45: 45 Amps	35: 35 Amps	Switching Type Blank: Zero Voltage Turn-On -10: Instantaneous Turn-On	
		48: 48-530 VAC	55: 55 Amps	55: 55 Amps		
		60: 48-660 VAC	65: 65 Amps	65: 65 Amps		


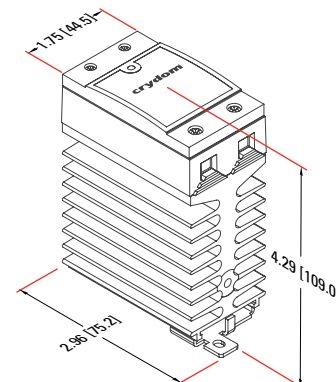


SeriesOne DR Dual • 6 Amps




- DIN Rail mount 18 mm wide Solid State Dual Relay
- Two independent channels (6 Amps)
- Operating Voltage of 24-280 VAC and 48-600 VAC
- Fits standard 35 mm DIN Rail profiles
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Flexible Control Voltage of 4-32 VDC
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (inductive loads) output
- IP20 housing for greater safety
- LED indicator for easy identification of control status
- UL & cUL listed
- UL 508 overload endurance rated

Notes: **A B C D J**

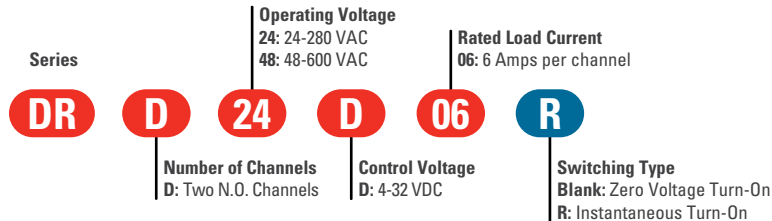

ID Marker Strips
Page 80

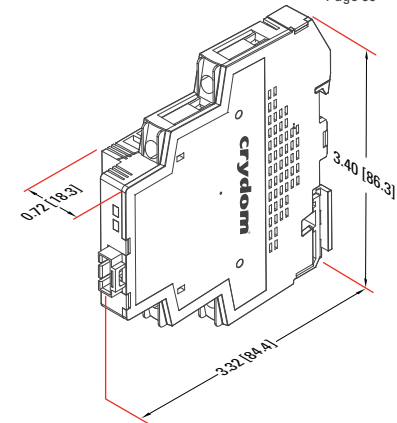

SeriesOne DR Timer • 6 Amps



- DIN Rail mount 11 mm (6 Amps) Solid State Relay Timer
- Operating Voltage of 24-280 VAC
- Fits standard 35 mm DIN Rail
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Universal Control Voltage of 12-24, 90-140 & 180-240 VAC/DC
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (inductive loads) output
- IP20 housing for greater safety
- LED indicator for easy identification of control status
- UL listed & cUL recognized
- UL 508 overload endurance rated

Notes: **A** **B** **C** **D** **J**

Series

DRT

A

24

B

06

R

Timing Function

A: A/At, Delay on Make
B: Single Shot
C: Delay on Break
H: H/Ht, Interval
L: L/Li, Repeat Cycle
U: Multifunction
 (A/At, H/Ht, D/Di,
 B, C, Ac & Bw)

Control Voltage


A: 180-240 VAC/DC
B: 90-140 VAC/DC
D: 12-24 VAC/DC

Rated Load Current

06: 6 Amps

Switching Type

Blank: Zero Voltage Turn-On
R: Instantaneous Turn-On

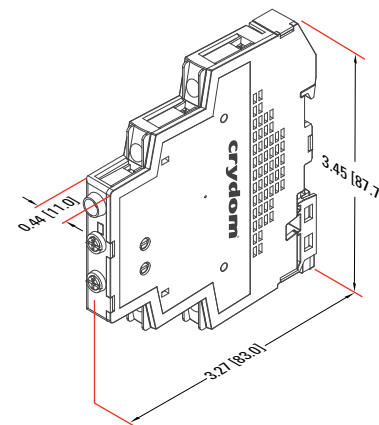


DRA3P Series • 2.4-4.2 Amps



- 2.4 & 4.2 Amp rated 3 phase Solid State Contactor
- Operating Voltage of 48-510 VAC, 3-Phase
- Fits standard 35 mm DIN Rail profiles
- No heat sink required & cage style screw terminals for easy installation & reliable wire connection
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Wide range of Control Voltage of 5 VDC, 24 VDC, 48 VAC, 115 VAC, 230 VAC
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (inductive loads) output
- LED indicator for easy identification of control status
- Overvoltage Protection included
- HP & kW (IEC) rated
- UL 508 overload endurance rated

Notes: **A B C D J**

Series	Operating Voltage	Rated Load Current	Controlled Legs
DRA	48: 48-510 VAC	2: 2.4 Amp/ 1HP @ 480 VAC	Blank: 3 Legs 2: 2 Legs
3P		4: 4.2 Amp/ 2HP @ 480 VAC	
48			
D	Function 3P: 3 Phase		
4	Control Voltage D: 4-6 VDC E: 18-28 VDC A: 200-265 VAC B: 90-140 VAC C: 36-60 VAC		
R		Switching Type Blank: Zero Voltage Turn-On R: Instantaneous Turn-On	
2			

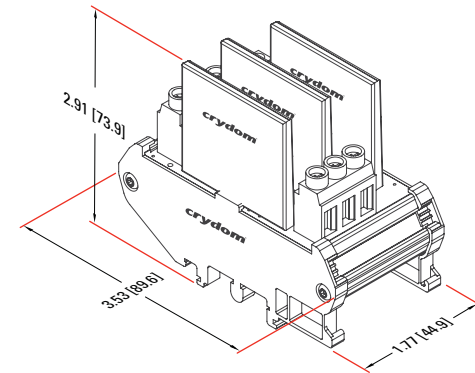

DRA3R Series • 2.4-4.2 Amps



- 2.4 & 4.2 Amps rated Motor Reversing Solid State Contactor
- Operating Voltage 48-510 VAC, 3 phase
- Protective Forward/Reverse interlock built-in function
- Fits standard 35 mm DIN Rail profiles
- No heat sink required & cage style screw terminals for easy installation & reliable wire connection
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Wide range of Control Voltage of 5 VDC, 24 VDC, 48 VAC, 115 VAC, 230 VAC
- Input status LED, Forward (green), Reverse (yellow)
- Overvoltage Protection included
- HP & kW (IEC) rated
- UL 508 overload endurance rated

Notes: **A B D J**

Series

DRA

3R

48

D


4

Function
3R: Motor Reverser

Operating Voltage
40: 48-415 VAC
48: 48-510 VAC

Rated Load Current
2: 2.4 Amps/1HP @ 480 VAC
4: 4.2 Amps/2HP @ 480 VAC

Control Voltage
D: 4-6 VDC
E: 18-28 VDC
A: 200-265 VAC
B: 90-140 VAC
C: 36-60 VAC


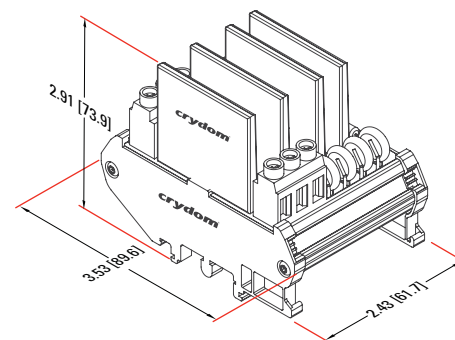


CTR Series • 25 Amps



- 3 Phase Solid State Contactor with ratings 25 Amps per phase @ 600 VAC
- Fits standard 35 mm DIN Rail profiles
- 90 mm width package
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Flexible Control Voltage of 4-32 VDC, 90-140 VAC, 180-280 VAC
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (inductive loads) output
- LED indicator for easy identification of control status
- Internal TVS eliminates the need for external Overvoltage Protection
- UL 508 overload endurance rated

Notes: **A B C D J**

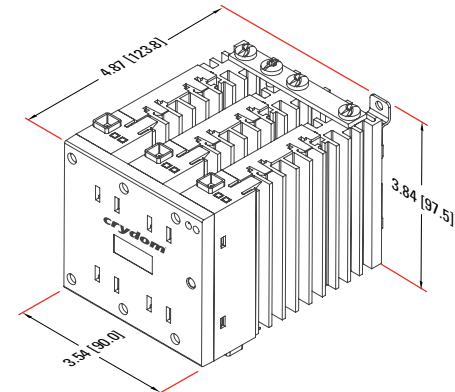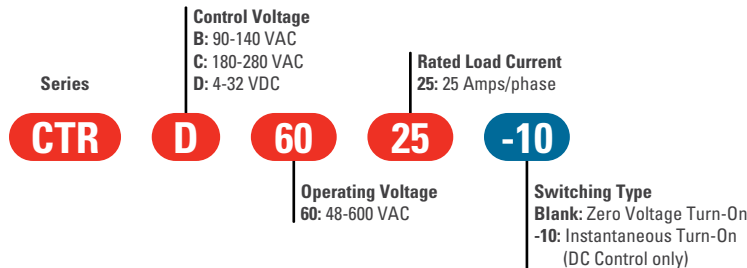

SOLICON DRC3P Series • 7.6 Amps




- 3 Phase Solid State Contactor with ratings of 4.8 & 7.6 Amps per phase @ 480 VAC
- Up to 5 HP / 3.7 kW Motor Controller ratings
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- EMC compliant (LEVEL 3) for reliable operation in harsh electrical environments
- Ultra-efficient thermal management design (Patented)
- Flexible 18-30 VAC/DC, 36-55 VAC/DC, 90-140 VAC or 208-265 VAC Control Voltage
- LED indicator for easy identification of control status
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- Internal TVS eliminates the need for external Overvoltage Protection

Notes: **A B C D J**



ID Marker Strips
Page 80

Series	Operating Voltage	Load Current per Phase / HP Ratings	Switching Mode
DRC	48: 480 VAC	4: 7.6 Amp FLA (x2 Controlled Legs); 4.8 Amp FLA (x3 Controlled Legs)	Blank: Zero Voltage Turn-On R: Instantaneous Turn-On
3P			
48			
D	Control Voltage A: 208-265 VAC B: 90-140 VAC C: 36-55 VAC/DC D: 18-30 VAC/DC		
4			
00		Auxiliary Contacts, N.O. - N.C. 00: Not included 11: 1 Solid State Auxiliary Contact, Normally Open; 1 Solid State Auxiliary Contact, Normally Closed 20: 2 Solid State Auxiliary Contacts, Normally Open	
R			Controlled Legs Blank: 3 Controlled Legs 2: 2 Controlled Legs
2			

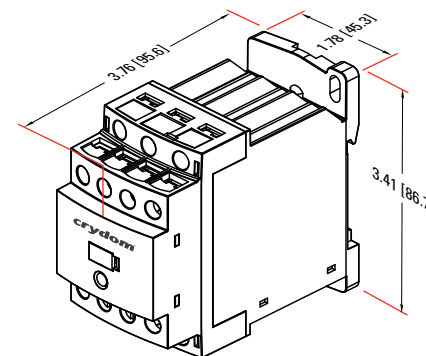


SOLICON DRC3R Series • 7.6 Amps




- Motor Reversing Contactor with rating of 7.6 Amps per phase @ 400-480 VAC
- Up to 5 HP / 3.7 kW Motor Controller ratings
- Built-in interlock circuit protects the relay/load if both Forward & Reverse inputs are simultaneously actuated
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- EMC compliant (LEVEL 3) for reliable operation in harsh electrical environments
- Ultra-efficient thermal management design (Patented)
- Flexible 18-30 VAC/DC, 36-55 VAC/DC, 90-140 VAC or 208-265 VAC Control Voltage
- LED indicator for easy identification of control status and direction (2 colors)

Notes: **A B D J**



ID Marker Strips
Page 80

Series	Operating Voltage	Load Current per Phase
DRC	40: 400 VAC 48: 480 VAC	4: 7.6 Amp FLA
3R		
48		
D		
4		
00		
Function	Control Voltage	Auxiliary Contacts, N.O. - N.C.
3R: Reversing Contactor	A: 208-265 VAC B: 90-140 VAC C: 36-55 VAC/DC D: 18-30 VAC/DC	00: Not included 20: 2 Solid State Auxiliary Contacts, Normally Open (1 contact for each direction)

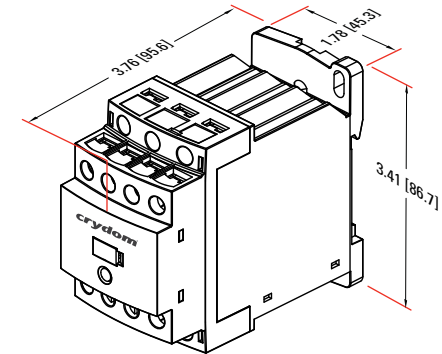

DRA-CN Series • 0.1-3.5 Amps




- Thin 6.2 mm DIN Rail mount Solid State Relay
- Replaceable CN Series SSR with ratings of 3.5 Amps @ 24 VDC or 100 mAmps @ 48 VDC available
- LED indicator for easy identification of control status
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)

Notes: **A B D J**



Plug-In Mount
Relays
Page 69



ID Marker Strips
Page 80

Series

DRA-CN

024D

24

Operating Voltage


024D: 0-24 VDC, 3.5 Amps

048D: 0-48 VDC, 0.1 Amps

Assembly Input Voltage

05: 3-12 VDC

24: 15-30 VDC

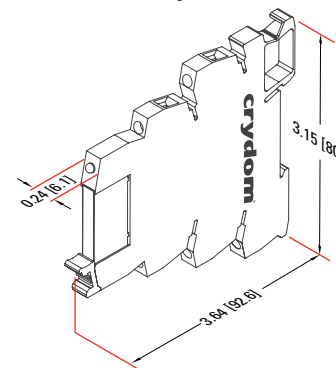


Specifications are subject to change without prior notice

DRA Series • 3-10 Amps



- Ready-to-use DIN Rail mountable Solid State Relay assemblies using standard Crydom SIP SSRs
- Slim 10 mm (single channel) & 54 mm (four channels) packages
- Ratings from 3 to 10 Amps per channel
- Operating Voltage of 1-200 VDC with high efficiency FETs
- Fits standard 35 mm DIN Rail profiles
- Cage style screw termination for easy and reliable wire connection
- Available with Normally Closed output
- LED indicator for easy identification of control status

Notes: **A B D H J**



PCB Mount Relays
Page 35

Series



DRA

4

Number of Channels
1: One N.O. Channel
4: Four N.O. Channels

CMX100D10

Standard Crydom SSR p/n
including the following series:
CMX/CMXE
MP (One Channel only)

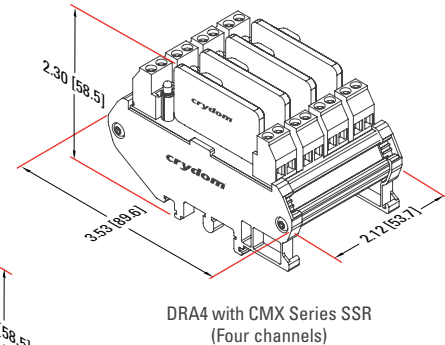

SeriesOne DR • 3-12 Amps




- DIN Rail mount 11 mm (3 & 6 Amps) or 18 mm (12 Amps) wide Solid State Relay
- 3, 6 & 12 Amps Rated Load Current
- Operating Voltage of 1-60 VDC and 1-100 VDC
- Fits standard 35 mm DIN Rail profiles
- MOSFET output provides added reliability in commercial and heavy industrial applications
- Flexible Control Voltage 4-32 VDC
- IP20 housing for greater safety
- LED indicator for easy identification of control status
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)
- UL & cUL listed including General Purpose & Motor Controller ratings
- UL 508 overload endurance rated

Notes: **A B D J**



ID Marker Strips
Page 80

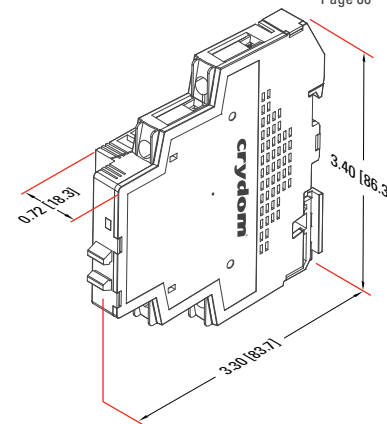

Series	Operating Voltage	Rated Load Current
DR	06: 1-60 VDC	03: 3 Amps
06	10: 1-100 VDC	06: 6 Amps
D		12: 12 Amps *
12		
	Control Voltage	
	D: 4-32 VDC	

* Drawing shown on the right

CKM Series • 10-30 Amps



- Solid State Relay with ratings from 10 to 30 Amps @ 60 VDC
- Fits standard 35 mm DIN Rail profiles
- Slim 22.5 mm (width) package
- Low leakage MOSFET output provides added reliability in commercial and heavy industrial applications
- Flexible Control Voltage 4-32 VDC
- LED indicator for easy identification of control status
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)

Notes: **A B D J**

Series

Operating Voltage
06: 0-60 VDC

CKM

06


10

Rated Load Current

10: 10 Amps

20: 20 Amps

30: 30 Amps

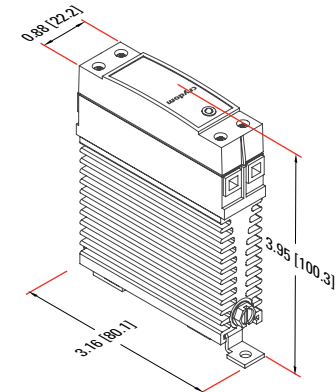

SeriesOne DR Timer • 6 Amps



- DIN Rail mount 11 mm (6 Amps) Solid State Relay Timer
- Operating Voltage of 1-60 VDC
- Fits standard 35 mm DIN Rail
- Power FET output provides added reliability in commercial and heavy industrial applications
- Universal Control Voltage of 12-24 VAC/DC
- IP20 housing for greater safety
- LED indicator for easy identification of control status
- UL listed & cUL recognized
- UL 508 overload endurance rated

Notes: **A B C D J**

Series

DRT

A

06

D

06


Operating Voltage
06: 60 VDC

Rated Load Current
06: 6 Amps

Timing Function

A: A/At, Delay on Make
B: Single Shot
C: Delay on Break
H: H/Ht, Interval
L: L/Li, Repeat Cycle
U: Multifunction
(A/At, H/Ht, D/Di,
B, C, Ac & Bw)

Control Voltage
D: 12-24 VAC/DC

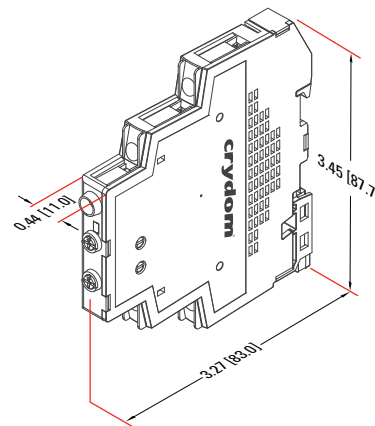


DRA4D Series • 6-12 Amps



- DC Motor/Polarity Reversing Solid State Contactor
- 6 & 12 Amps ratings
- Operating Voltage of 1-100 VDC & 1-250 VDC
- Protective Forward/Reverse interlock built-in function
- Fits standard 35 mm DIN Rail profiles
- No heat sink required & cage style screw terminals for easy installation & reliable wire connection
- Convenient FET switches in H-Bridge configuration
- DC Control Voltage options
- Input Status LED, Forward (green), Reverse (yellow)
- HP & kW (IEC) rated

Notes: **A** **B** **D** **J**

Series	Operating Voltage	Rated Load Current
DRA	100: 1-100 VDC	6: 6 Amps / 1/4 HP, 2 FLA @ 180 VDC
4D	250: 1-250 VDC	12: 12 Amps / 1/4 HP, 4 FLA @ 90 VDC
100		
D	Function 4D: Motor Reverser	Control Voltage D: 5-15 VDC E: 15-32 VDC
6		

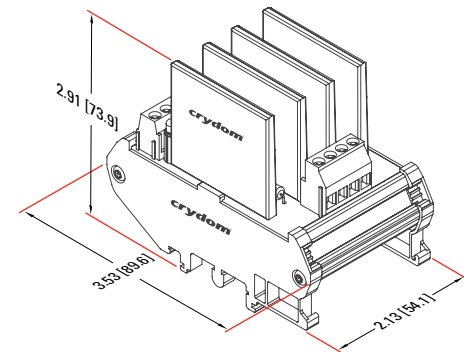

Plug-In Mount

Crydom Plug-In Relays are designed to install in industry standard relay sockets. They can also be soldered directly on PCB assemblies if so desired. Available for applications requiring from **2 to 5 Amps at 24 to 280 VAC** or **0.1 to 5 Amps at 1 to 100 VDC** with inputs covering the range of 24 to 140 VAC or 2 to 32 VDC, these Single Pole Single Throw Normally Open (SPST) relays offer the **speed and dependability of Solid State switching in a traditional mechanical relay format**. Visit the Accessories and Assemblies sections of the catalog for information on compatible sockets and "ready-to-use" Assemblies. Visit the Plug-In SSR section of the catalog or Crydom web site for additional information on Crydom Plug-In Mount SSRs.

AC Output

Page	Series	Description	Rating Amps		
			2	3	5
Solid State Relays					
67	CN	280 V / 2 A	■		
68	ED	280 V / 5 A		■	■

DC Output


Page	Series	Description	Rating Amps		
			0.1	3.5	5
Solid State Relays					
69	CN	1-60 V	■	■	
70	ED	1-100 V			■




ED Series • 3-5 Amps



- AC Output Solid State Relay in an industry standard EMR plug-in package
- Ratings of 3 & 5 Amps
- Operating Voltage of 24-280 VAC
- No moving parts eliminates arcing & contact bounce, significantly increasing the life expectancy over equivalent rated electromechanical relays and contactors
- Back-to-back SCR output provides added reliability in commercial and heavy industrial applications
- Available with Zero Voltage Turn-On (resistive loads) or Instantaneous Turn-On (phase control or inductive loads) output
- LED indicator for easy identification of control status
- Wide range of AC or DC Control Voltage options
- Quick Connect termination for easy installation in sockets or on boards
- DIN Rail & PCB mountable sockets available
- Silent operation (no acoustical switching noise)
- UL & IEC General Use & Motor Controller Ratings available



DIN Rail Sockets
Page 82




PCB Sockets
Page 82

Notes: **A B C D J**

Series	Operating Voltage	Rated Load Current
ED	24: 24-280 VAC	3: 3 Amps (not available with B & E suffixes)
24		5: 5 Amps*
C	Control Voltage	
3	B: 100-140 VAC	Switching Type
R	C: 18-32 VDC	Blank: Zero Voltage Turn-On
	D: 3-15 VDC	R: Instantaneous Turn-On
	E: 18-36 VAC	
	F: 48-72 VDC	

* Drawing shown on the right

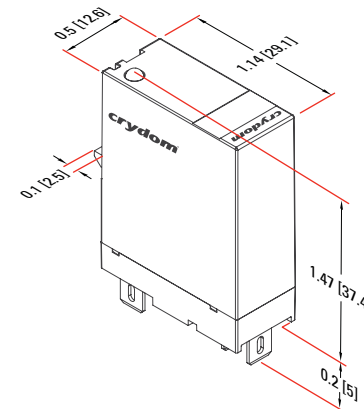


CN Series • 0.1-3.5 Amps




- Thin (5 mm) Solid State Relay ideally suited for high density PCB applications
- Ratings of 0.1 Amps @ 48 VDC or 3.5 Amps @ 48 VDC
- Pluggable into industry standard relay sockets or solderable
- DIN Rail mountable using DRSCN series sockets
- UL 508 overload endurance rated


Notes: **A B D G J**




DIN Rail Model
Page 60



ID Marker Strips
Page 80



Sockets
Page 82

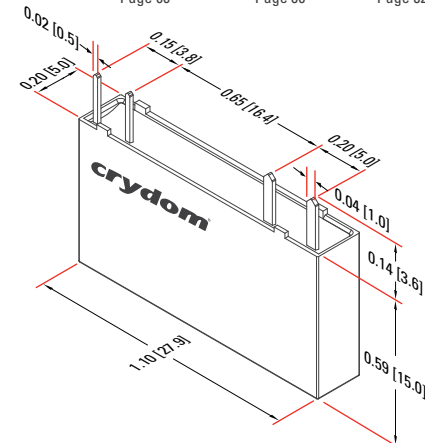

Series

CN

024D

24

Operating Voltage

024D: 0-24 VDC, 3.5 Amps

048D: 0-48 VDC, 0.1 Amps

Control Voltage

05: 3-12 VDC

24: 15-30 VDC


60: 38-72 VDC

ED Series • 5 Amps




- DC output Solid State Relay in an Industry standard EMR plug-in package
- 5 Amps rated
- Operating Voltage of 1-48 VDC and 1-80 VDC
- No moving parts eliminates arcing & contact bounce, significantly increasing the life expectancy over equivalent rated electromechanical relays and contactors
- LED indicator for easy identification of control status
- Wide range of AC or DC Control Voltage options
- Quick Connect termination for easy installation in sockets or on boards
- DIN Rail & PCB mountable sockets available
- Silent operation (no acoustical switching noise)
- Ideally suited for both resistive and inductive loads (inductive loads such as motors and EMR/solenoid coils must be diode suppressed)
- UL & IEC General Use & Motor Controller Ratings available

Notes: **A B D J**



DIN Rail Sockets
Page 82



PCB Sockets
Page 82

Series	Operating Voltage	Rated Load Current
ED	06: 1-48 VDC	5: 5 Amps
06	10: 1-80 VDC	
C		
5		

Control Voltage

B: 90-140 VAC *


C: 18-32 VDC

D: 5-15 VDC

E: 18-36 VAC *

F: 48-72 VDC

* Drawing shown on the right

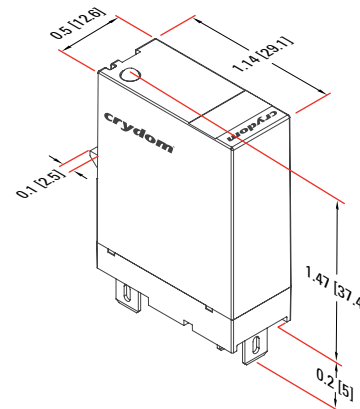

Other Crydom Motion Control solutions available at: motion.crydom.com

Assemblies

Crydom offers a **variety of “ready-to-use” assemblies** featuring proven Crydom Solid State Relays and Contactors installed in DIN Rail Sockets or on Panel or DIN Rail mounted Heat Sinks. Assemblies are **available for applications ranging from 1 to more than 80 Amps in both AC or DC output versions**. Any standard Crydom Panel Mount or SIP type PCB Mount SSR or Contactor can be offered as a “ready-to-use” Assembly. Contact the nearest Crydom Distributor, Representative or local Crydom Sales Office if you don't locate your exact needed Assembly in the catalog or in the Crydom website.



Heat Sink / SSR Assemblies



- Standard single, dual and 3 phase SSRs mounted on high efficiency HS Series heat sinks
- Ready-to-use assemblies with optimum SSR / thermal pad / heat sink combination simplifying selection, ordering and installation
- Thermal efficiency ratings from 5.0°C/W to 0.25°C/W @ 40°C ambient
- Full SSR assembly ratings up to 82.5 Amps (single phase) or 27.5 Amps per phase (three phase) in a 40°C ambient
- DIN Rail and Panel mountable versions available for both stand-alone heat sinks and SSR assemblies (most models)
- Customized solutions available using single, dual and 3 phase SSRs
- Wide variety of accessories available

Notes: **A B C D E F**

Total Number of Accepted Standard SSRs

- 1: 1 SSR (50, 30, 25, 20, 15 & 10 suffix only)
- 2: 1 or 2 SSRs (20, 17, 12 & 07 suffix only)
- 3: 1-3 SSRs or one 3phase (10, 07, 05, 03 & 02 suffix only)

Standard Crydom SSR p/n

Series

HS

17

2

DR

2

D2450

Thermal Resistance

- 50: 5.0 °C/W (DR suffix only)
- 30: 3.0 °C/W
- 25: 2.5 °C/W
- 20: 2.0 °C/W
- 17: 1.7 °C/W
- 15: 1.5 °C/W
- 12: 1.2 °C/W
- 10: 1.0 °C/W
- 07: 0.7 °C/W
- 05: 0.5 °C/W
- 03: 0.36 °C/W
- 02: 0.25 °C/W

DIN Rail Bracket

- Blank: Not included
- DR: Included (50, 30, 20, 15, 12 & 10 suffix only)

Number of Mounted SSRs


- Blank: 1
- 2: 2
- 3: 3



Panel Mount Relays
Page 8



Heat Sinks &
other Accessories
Page 75

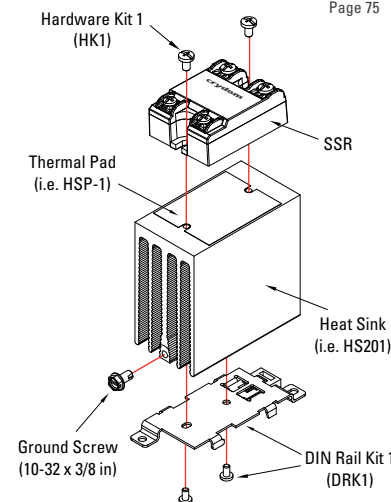



Specifications are subject to change without prior notice

Accessories

Crydom supports its extensive SSR and Contactor product lines with a comprehensive offer of accessories including **Heat Sinks, Thermal Pads, Protective Covers, Sockets, Terminal Lugs, Hardware Kits, Marker Strips and DIN Rail Kits** to make it easy to employ Crydom SSRs and Contactors in any application. Crydom can also create **special configuration SSRs or Contactors** that include installed accessories if so desired. Visit the catalog or Crydom website for additional information on Crydom SSR accessories.

Heat Sink/Accessories Compatibility

Page	Part number	HK1	HK2	HKM1	HSP-1 HSP-2	HSP-3 HSP-5	KS100	KS101	KS300	DRK1
75	HS501DR									
76	HS301									
76	HS251									
76	HS202									
77	HS201									
77	HS172									
77	HS151									
78	HS122									
78	HS103									
78	HS101									
79	HS073									
79	HS072									
79	HS053									
80	HS033									
80	HS023									

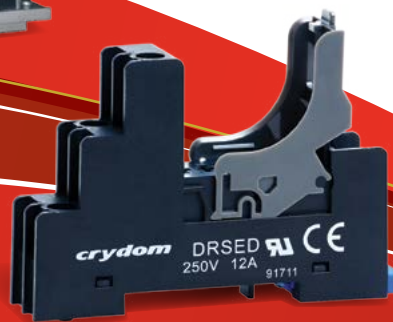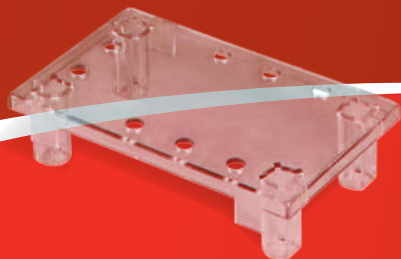

Covers • Hockey Puck




Part no.: KS100, KS100-SMR

Clear plastic cover for Generation 3 standard hockey puck package SSRs (2.25 x 1.75 in). Clear plastic cover with cut out window for SMR-6 and MC Series.

Part no.: KS101

Clear plastic cover for Generation 4 standard hockey puck package SSRs (2.25 x 1.75 in). Safety covers provide added protection from electric shock when installing or checking equipment.

Notes: **A B J**

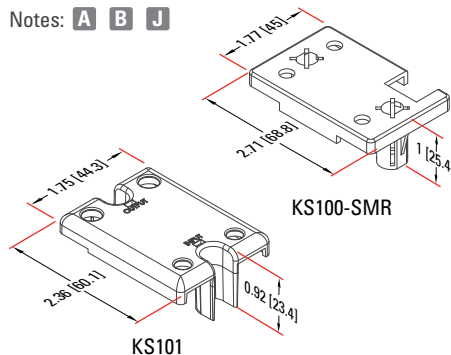


Covers • Large Puck



Part no.: KS300

Clear plastic cover large puck panel mount SSRs (4 x 2.9 in). Safety covers provide added protection from electric shock when installing or checking equipment.

Notes: **A B J**

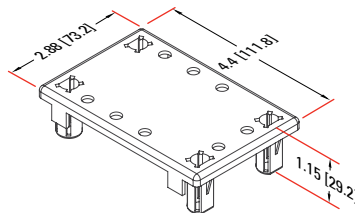

DIN Rail Bracket




DIN Rail Kit 1

Part no.: DRK1

Spring, retaining clip, 45 mm DIN Rail bracket and 2 screws 6-32 x 1/4 in.

Notes: **A B J**

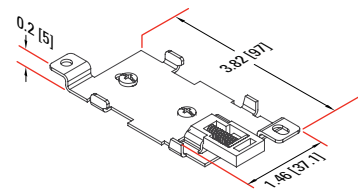

Filters • AC Filters




Part no.: 1F25
EMI noise suppression filter for SSR in AC single phase systems

Part no.: 3F20 (shown above)
EMI noise suppression filters for SSR in three phase systems

Part no.: 3F20-4 (shown below)
EMI noise suppression filters with neutral for SSR in three phase systems

Notes: **A B J**



Hardware Kits



HK1



HKM1



HK2




Part no.: HK1
Bag with 2 SSR mounting screws 8-32 x 3/8 in.


Part no.: HK2
Bag with 1 ground screw 10-32 x 3/8 in and 2 bracket screws 6-32 x 1/4 in.

Part no.: HKM1
Bag with 2 SSR mounting screws M4 x 9mm.



Notes: **A B J**



HK1



HKM1




HK2

Heat Sinks • HS501DR



- 5.0°C/W Thermal resistance
- Suitable for 1 single or dual SSR
- DIN Rail mountable
- Heat sink material is steel with clear zinc plating surface finish

Notes: **A B J L**



HS501DR includes


DIN Rail Mounting Bracket
M4 Mounting Screws
Latch Release

Heat Sinks • HS301



- 3.0°C/W Thermal resistance
- Suitable for 1 single or dual SSR
- Panel mountable or DIN Rail mountable version available as HS301DR
- Heat sink material is aluminum with black anodized finish

Notes: **A B J L**

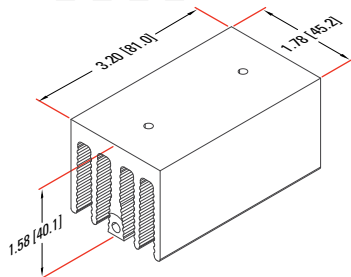

HS301DR includes


Ground Screw (10-32 x 3/8 in)
DIN Rail Kit 1 (DRK1)
Heat Sink (HS301)
One Hardware Kit 1 (HK1)

Heat Sinks • HS251



- 2.5°C/W Thermal resistance
- Suitable for 1 single or dual SSR
- Panel mountable
- Heat sink material is aluminum with natural finish

Notes: **A B J L**




Heat Sinks • HS202



- 2.0°C/W Thermal resistance
- Suitable for 1 or 2 single or dual SSR
- Panel mountable or DIN Rail mountable version available as HS202DR
- Heat sink material is aluminum with black anodized finish

Notes: **A B J L**



HS202DR includes

Ground Screw (10-32 x 3/8 in)
DIN Rail Kit 1 (DRK1)
Heat Sink (HS202)
One Hardware Kit 1 (HK1)


Specifications are subject to change without prior notice

Heat Sinks • HS201



- 2.0°C/W Thermal resistance
- Suitable for 1 single or dual SSR
- Panel mountable or DIN Rail mountable version available as HS201DR
- Heat sink material is aluminum with black anodized finish

Notes: **A B J L**



HS201DR includes


Ground Screw (10-32 x 3/8 in)
DIN Rail Kit 1 (DRK1)
Heat Sink (HS201)
One Hardware Kit 1 (HK1)

Heat Sinks • HS172



- 1.7°C/W Thermal resistance
- Suitable for 1 or 2 single or dual SSRs
- Panel mountable
- Heat sink material is aluminum with natural finish

Notes: **A B J L**




Heat Sinks • HS151



- 1.5°C/W Thermal resistance
- Suitable for 1 single or dual SSR
- Panel mountable or DIN Rail mountable version available as HS151DR
- Heat sink material is aluminum with black anodized finish

Notes: **A B J L**



HS151DR includes


Ground Screw (10-32 x 3/8 in)
DIN Rail Kit 1 (DRK1)
Heat Sink (HS151)
One Hardware Kit 1 (HK1)

Heat Sinks • HS122



- 1.2°C/W Thermal resistance
- Suitable for 1 or 2 single or dual SSRs
- Panel mountable or DIN Rail mountable version available as HS122DR
- Heat sink material is aluminum with black anodized finish

Notes: **A B J L**



HS122DR includes


Ground Screw (10-32 x 3/8 in)
DIN Rail Kit 1 (DRK1)
Heat Sink (HS122)
Two Hardware Kits 1 (HK1)

Heat Sinks • HS103



- 1.0°C/W Thermal resistance
- Suitable for 1, 2 or 3 single or dual SSRs; one 3 phase SSR
- Panel mountable or DIN Rail mountable version available as HS103DR
- Heat sink material is aluminum with black anodized finish

Notes: **A B J L**



HS103DR includes


Heat Sink (HS103)
Extruded DIN Rail Bracket
Fasteners
Three Hardware Kits 1 (HK1)

Heat Sinks • HS101



- 1.0°C/W Thermal resistance
- Suitable for 1 single or dual SSRs; one 3 phase SSR
- Panel mountable
- Heat sink material is aluminum with black anodized finish

Notes: **A B J L**




Specifications are subject to change without prior notice

Heat Sinks • HS073



- 0.7°C/W Thermal resistance
- Suitable for 1, 2 or 3 single or dual SSRs; one 3 phase SSR
- Panel mountable
- Heat sink material is aluminum with black anodized finish

Notes: **A B J L**




Heat Sinks • HS072



- 0.7°C/W Thermal resistance
- Suitable for 1 or 2 single or dual SSRs
- Panel mountable
- Heat sink material is aluminum with natural finish

Notes: **A B J L**

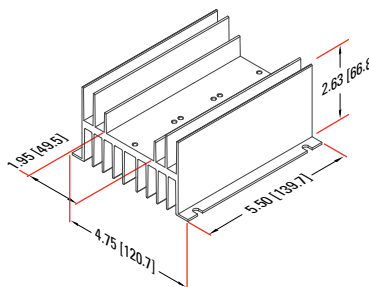


Heat Sinks • HS053



- 0.5°C/W Thermal resistance
- Suitable for 1, 2 or 3 single or dual SSRs; one 3 phase SSR
- Panel mountable
- Heat sink material is aluminum with black anodized finish

Notes: **A B J L**




Heat Sinks • HS033



- 0.36°C/W Thermal resistance
- Suitable for 1, 2 or 3 single or dual SSRs; one 3 phase SSR
- Panel mountable
- Heat sink material is aluminum with black anodized finish

Notes: **A B J L**




Heat Sinks • HS023



- 0.25°C/W Thermal resistance
- Suitable for 1, 2 or 3 single or dual SSRs; one 3 phase SSR
- Panel mountable
- Heat sink material is aluminum with black anodized finish

Notes: **A B J L**



ID Marker Strips



CNLB



CNLN



CNL2



Part no.: CNLB

A package of 10 plastic strips comprising 10 individual unprinted markers.


Part no.: CNLN

A package of 10 plastic strips comprising 10 markers printed individually from 1 to 10.


Part no.: CNL2

A package of 10 plastic strips comprising 10 markers printed individually from 11 to 20.

Notes: **A B J**

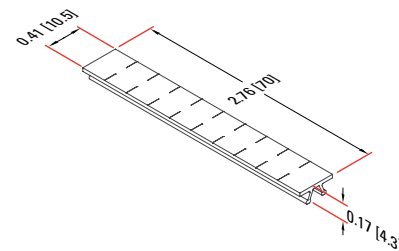

Lug Terminals

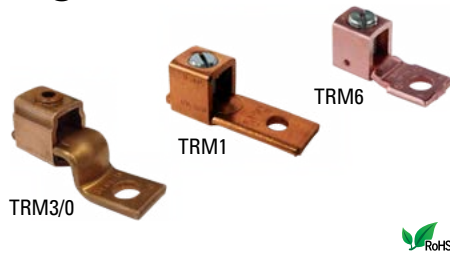

Part no.: TRM3/0

Copper wire lug for AWG 4 (21.2 mm²) to AWG 3/0 (85 mm²) wire size. Mounts with 3/8" bolt/stud.


Part no.: TRM1

Copper wire lug for AWG 6 (13.3 mm²) to AWG 0 (53.5 mm²) wire size. Mounts with #8, #10, M4 or M5 screws. (Not compatible with IP20 covers)

Part no.: TRM6

Copper wire lug for AWG 14 (2.1 mm²) to AWG 6 (13.3 mm²) wire size. Mounts with #8, #10, M4 or M5 screws.

Notes: **A B J**

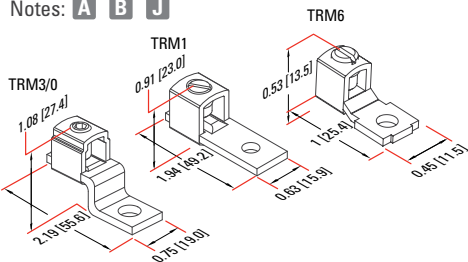


Power Supply • 20 VAC



Part no.: PS120, PS240

The PS120 and PS240 power supplies are specifically designed to supply the 20 VAC supply voltage used by the Crydom LPCV series linear proportional controls, from a 120 or 240 VAC 50/60 Hz nominal AC voltage main supply.

Notes: **A B J**



Sockets • DRS Socket




DRS Series DIN Rail Mountable Sockets

Part no.: DRS1
10 mm single channel DIN Rail mountable socket to mount 1 Crydom PCB mount relay onto standard 35 mm DIN Rail profiles.

Part no.: DRS4

54 mm four channel DIN Rail mountable socket to mount up to 4 Crydom PCB mount relays onto standard 35 mm DIN Rail profiles.

Notes: **A B J**

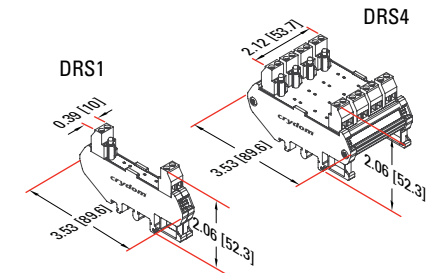

Sockets • DRS-CN Sockets




CN Series DIN Rail Mountable Sockets

Part no.: DRSCN05, DRSCN24

DIN Rail mountable socket to mount CN Series relays onto standard 35 mm DIN Rail profiles. Maximum output rating for DRSCN sockets is 250 V, 6 Amps regardless of selected SSR. DRS-CN sockets are 6 mm wide and include input status LED.

Notes: **A B G J**



Sockets • DRSED Socket




ED Series DIN Rail Mountable Socket

Part no.: DRSED

Finger safe IP10 DIN Rail mountable socket to mount ED Series relays onto standard 35 mm DIN Rail profiles. Rated at 250 V AC/DC, 12 Amps. The DRSED includes M3 Combo screws.

Notes: **A B J**



Sockets • PCBSED Socket




ED Series PCB Mountable Socket

Part no.: PCBSED

PC Board mountable socket for ED series relays. Rated at 250 V AC/DC, 12 Amps. Suggested Pin-out hole diameter: 1.0 mm

Notes: **A B J**




Thermal Pads • Mini-Puck



Part no.: HSP-6

Thermal pad for mini-puck panel mount SSRs.
Includes adhesive on one side.

Notes: **A B J**



Thermal Pads • Hockey Puck




Part no.: HSP-1

25 pack of non-adhesive thermal pads for standard hockey puck package SSRs (2.25 x 1.75 in).

Part no.: HSP-2 (shown above)

Thermal pad for standard hockey puck package SSRs (2.25 x 1.75 in). Includes adhesive on one side.

Notes: **A B J**



Thermal Pads • Large Puck




Part no.: HSP-3

Thermal pad for large puck panel mount SSRs (4 x 2.9 in).

Part no.: HSP-5 (shown above)

Thermal pad for large puck panel mount SSRs (4 x 2.9 in).
Includes adhesive on one side.

Notes: **A B J**





AMERICAS



SENSATA TECHNOLOGIES INC.

529 Pleasant Street,
Attleboro, MA 02703
USA

+1 (877) 502 5500 – Option 2 – Option 3

sales.crydom@sensata.com

EUROPE, MIDDLE EAST & AFRICA



SENSATA TECHNOLOGIES HOLLAND B.V.

Jan Tinbergenstraat 80
7559 SP Hengelo
The Netherlands

+44 (1202) 416170

ssr-info.eu@sensata.com

ASIA



SENSATA TECHNOLOGIES CHINA CO., LTD.

30th Floor, InterContinental
Center,
100 Yu Tong Rd, Jing An District,
200070 Shanghai, China

China

+86 (21) 2306 1500

sales.isasia@list.sensata.com

Japan

+81 (45) 277 7117

sales.isasia@list.sensata.com

Korea

+82 (31) 601 2004

sales.isasia@list.sensata.com

India

+91 (80) 67920890

sales.isasia@list.sensata.com

Rest of Asia

+886 (2) 27602006 ext 2808

sales.isasia@list.sensata.com

© 2017 Crydom Inc., All Rights Reserved.

Specifications are subject to change without prior notice.
Crydom and the Crydom logo are registered trademarks
of Crydom Inc.

CAT/CR/SF/EN

Distributed by :

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9