

# General Specifications

## Electrical Capacity (Resistive Load)

**Power Level (silver):** 0.1A maximum @ 30V AC/DC

## Other Ratings

**Contact Resistance:** 50 milliohms maximum  
**Insulation Resistance:** 100 megohms minimum @ 500V DC  
**Dielectric Strength:** 500V AC minimum for 1 minute minimum  
**Mechanical Life:** 100,000 operations minimum  
**Electrical Life:** 50,000 operations minimum  
**Nominal Operating Force:** 3.43N  
**Contact Timing:** Nonshorting (break before make)  
**Travel:** Pretravel .087" (2.2mm); Overtravel .031" (0.8mm); Total Travel .118" (3.0mm)

## Materials & Finishes

**Housing:** Glass fiber reinforced polyamide  
**Base:** Glass fiber reinforced polyamide  
**Movable Contact:** Phosphor bronze with silver plating  
**Stationary Contacts:** Phosphor bronze with silver plating  
**Common Terminal:** Phosphor bronze with silver plating  
**End Terminals:** Phosphor bronze with silver plating  
**Lamp Terminals:** Phosphor bronze with silver plating

## Environmental Data

**Operating Temperature Range:** -25°C through +50°C (-13°F through +122°F) for Illuminated  
 -25°C through +70°C (-13°F through +158°F) for Nonilluminated  
**Humidity:** 90 ~ 95% humidity for 96 hours @ 40°C (104°F)  
**Vibration:** 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours  
**Shock:** 50G (490m/s<sup>2</sup>) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

## Installation

**Mounting Torque:** 0.49Nm (4.34 lb•in) maximum for round mounting nut  
**Cap Installation Force:** 9.8N (2.2 lbf) maximum downward force on cap  
**Soldering Time & Temperature:** Manual Soldering: See Profile A in Supplement section.

## Standards & Certifications

**UL:** **File No. E44145 - Recognized only when ordered with marking on switch.**  
 Add "/U" or "/CUL" before first dash in part number to order UL recognized switch.  
 All models recognized at 0.1A @ 30V AC/DC.

# Distinctive Characteristics

Full face and spot illumination available. Front panel relamping.

Choice of super bright LEDs in white, green, and blue in addition to bright red, amber, and green LEDs.

Compact front panel design with 9mm square or round bezel options.

Rear panel threaded mounting. Behind panel depth of less than one inch. 8mm body diameter fits common size panel cutout.

Latchdown feature gives indication of circuit status. Audible and tactile feedback with smooth and responsive operation.


Dual, sliding contacts with self-cleaning action provide contact stability, high reliability, and increased operating life.

Solder lug terminals have spacing of .100" (2.54mm) for choice of mounting.


Longer normally closed terminal facilitates wiring and soldering.

Molded-in terminals lock out flux, dust, and other contaminants.

Matching indicators available.

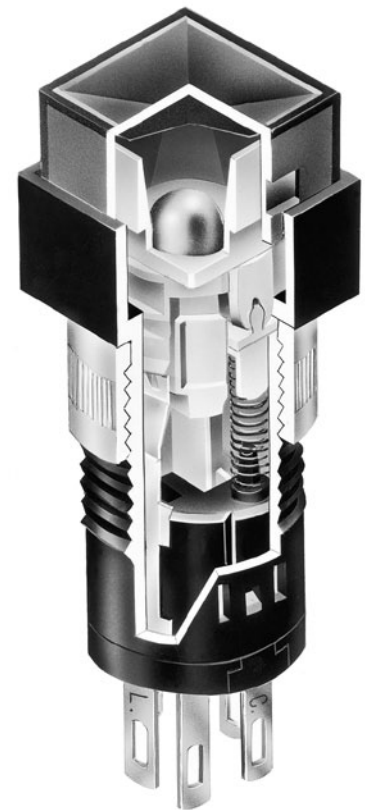

Actual Size



Toggles

Rockers

Pushbuttons

**D** Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt


Touch

Indicators

Accessories


Supplement

### TYPICAL SWITCH ORDERING EXAMPLE

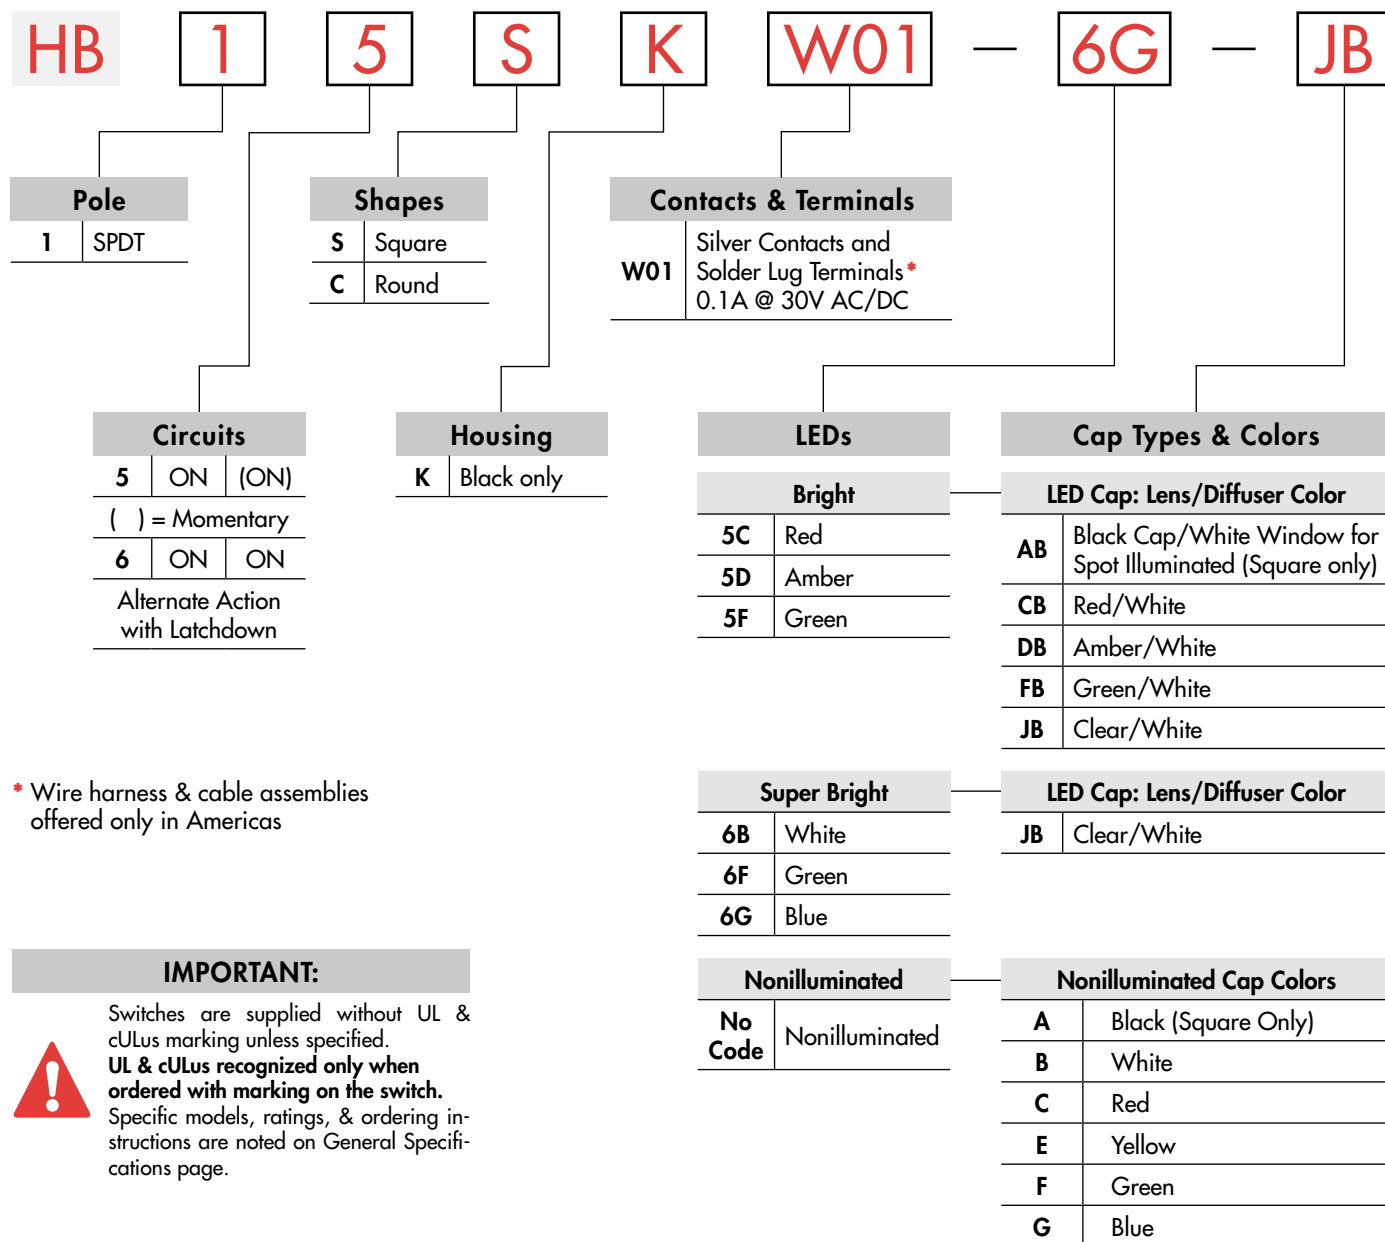

### DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

**HB15SKW01-6G-JB**

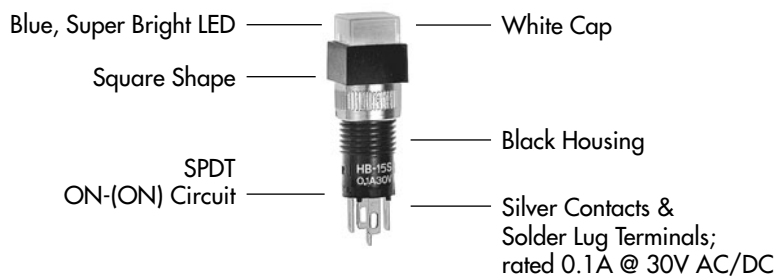

| POLES & CIRCUITS |               |                                     |            |                     |      |                                                                                                                                                                              |
|------------------|---------------|-------------------------------------|------------|---------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  |               | Plunger Position<br>( ) = Momentary |            | Connected Terminals |      | Throw & Switch/Lamp Schematics                                                                                                                                               |
| Pole             | Model         | Normal                              | Down       | Normal              | Down | Notes: Switch is marked with NO, NC, C, L.<br>LED circuit is isolated and requires external power source.                                                                    |
| SP               | HB15<br>*HB16 | ON<br>ON                            | (ON)<br>ON | 1-3                 | 1-2  | SPDT   |

\* When in latchdown position for the alternate circuit, cap position is .051" (1.3mm) above the built-in bezel.

SHAPES & PANEL CUTOUT




.354" (9.0mm) Square




.354" (9.0mm) Round

The bezel is an integral part of the switch body.




The bezel is an integral part of the switch body.



Panel Cutout & Mounting

Recommended Panel Thickness:  
.020 ~ .197" (0.5 ~ 5.0mm)



Overtightening the mounting nut AT073 may damage the switch housing.

HOUSING



Housing available in black only.

CONTACT MATERIALS, RATINGS, & TERMINALS




Silver Contacts

Power Level

0.1A maximum @ 30V AC/DC

Solder Lug




PCB Mounting

Solder lug terminals are spaced .100" x .200" (2.54mm x 5.08mm). This enables PCB mounting which can be accomplished by elongating PC board holes to .080" (2.03mm).

## LED COLORS &amp; SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C.  
LED circuit is isolated and requires external power source. Single element LED is colored in OFF state.  
If the source voltage exceeds the rated voltage, a ballast resistor is required.  
The resistor value can be calculated by using the formula in the Supplement section.

|                 |                                                                                   |                                                                                   |                                                                                   |              |       |       |              |       |      |       |
|-----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------|-------|-------|--------------|-------|------|-------|
| Bright<br>AT633 |  | Note for Super Bright:                                                            |  | Bright       |       |       | Super Bright |       |      | Unit  |
|                 |                                                                                   |                                                                                   |                                                                                   | 5C           | 5D    | 5F    | 6B           | 6F    | 6G   |       |
| Super Bright    |                                                                                   |  | Color                                                                             | Red          | Amber | Green | White        | Green | Blue |       |
| AT624G<br>Blue  |  | Forward Peak Current                                                              | I <sub>FM</sub>                                                                   | 30           | 30    | 25    | 30           | 30    | 30   | mA    |
| AT629B<br>White |                                                                                   | Typical Forward Current                                                           | I <sub>F</sub>                                                                    | 20           | 20    | 20    | 20           | 20    | 20   | mA    |
| AT630F<br>Green |                                                                                   | Forward Voltage                                                                   | V <sub>F</sub>                                                                    | 1.85         | 2.0   | 2.2   | 3.6          | 3.5   | 3.6  | V     |
|                 |                                                                                   | Reverse Peak Voltage                                                              | V <sub>RM</sub>                                                                   | 5            | 5     | 5     | 5            | 5     | 5    | V     |
|                 |                                                                                   | Current Reduction Rate Above 25°C                                                 | ΔI <sub>F</sub>                                                                   | 0.40         | 0.42  | 0.38  | 0.50         | 0.50  | 0.50 | mA/°C |
| T-1 Bi-pin      |                                                                                   | Ambient Temperature Range                                                         |                                                                                   | -25° ~ +50°C |       |       | -25° ~ +50°C |       |      |       |

No Code

No Lamp

## CAP TYPES &amp; COLORS


Color Codes: A Black B White C Red D Amber E Yellow F Green G Blue J Clear

## Cap Colors Available:

AB

Black Cap with Translucent  
White Window for LED Display

## Colored Cap for Bright LEDs

Square only  
Material: Polycarbonate  
Finish: MatteAT4052  
Spot IlluminatedLens/Diffuser  
Colors Available:

CB



Red/White

DB


Amber/White

FB

Green/White




AT4166  
SquareAT4167  
Round

Material: Polycarbonate Finish: Glossy

Transparent Colored  
LensTranslucent  
White DiffuserColored LED  
AT633

## White Cap for Bright &amp; Super Bright LEDs

JB

Clear Lens/  
White DiffuserAT4031  
SquareAT4032  
RoundMaterial: Polycarbonate  
Finish: GlossyTransparent Clear  
LensTranslucent  
White DiffuserColored LEDs  
AT624, AT629,  
AT630, or AT633

## Nonilluminated Caps

## Cap Colors Available:

A

Black  
(Square Only)

C

Red

F

Green

B

White



E

Yellow

G



Blue

Material: Polycarbonate Finish: Glossy

AT4035  
SquareAT4036  
Round

## TYPICAL SWITCH DIMENSIONS

## Single Pole


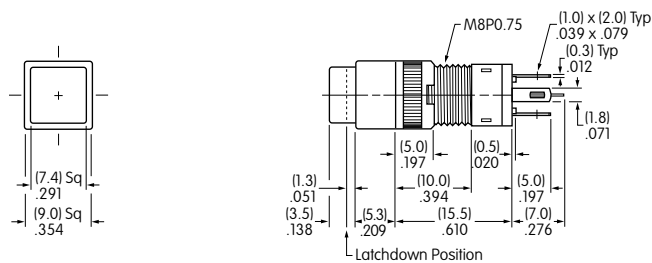


## Square



**HB15SKW01-5C-CB**

### Single Pole

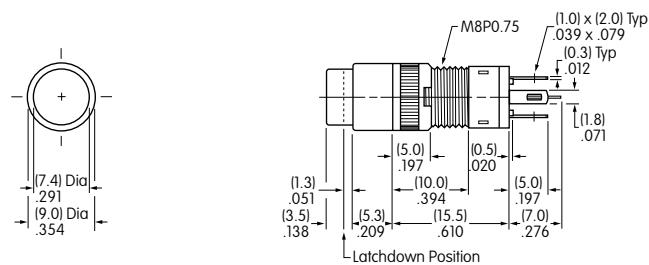

## Round




**HB16CKW01-5C-CB**

## ASSEMBLY INSTRUCTIONS


## Cap Removal

1. Have cap in extended position (not latched down) for alternate action models.
2. Use the grip slots on the sides of the cap and pull it out of the switch.



### LED Polarity & Orientation in Lamp Socket


For AT624, AT629, AT630: Insert the LED with the D flat opposite the black dot molded inside the switch lamp socket. For AT633: Insert the LED with the Black Dot on the terminal to the right.

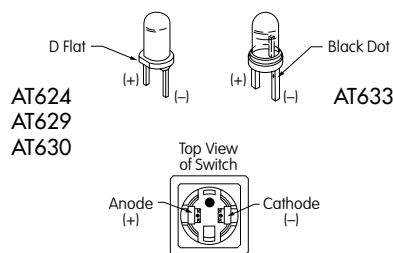

Super Bright LEDs AT624, AT629, & AT630 are electrostatic sensitive.

### Cap Replacement

1. Match the prongs on the cap base with the projections in the switch, at the same time aligning the spring clips on the cap with the indentations in the switch.
2. Press firmly in place.



## AT111 Lamping Tool

Lamping Tool AT111 may be used to remove and replace LED.



## AT110 Socket Wrench

Socket Wrench AT110 may be used to tighten the mounting nut.



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9