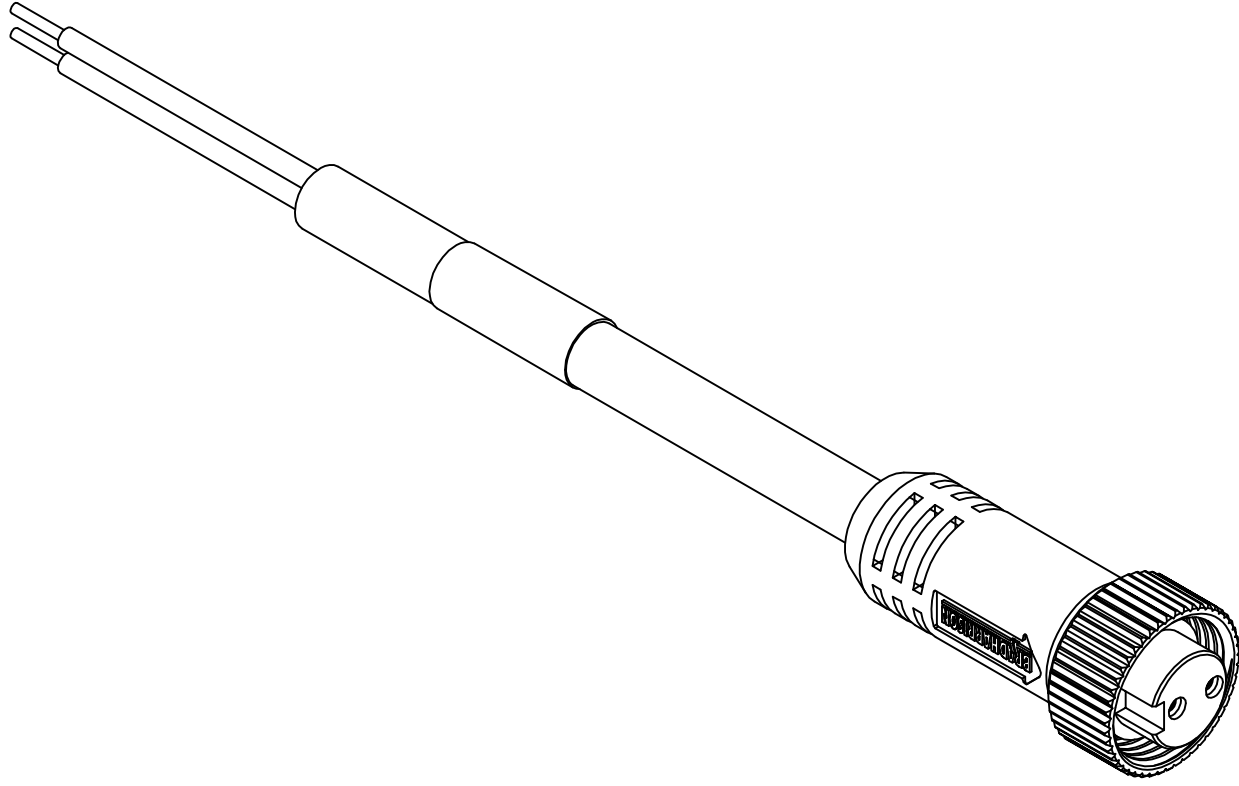
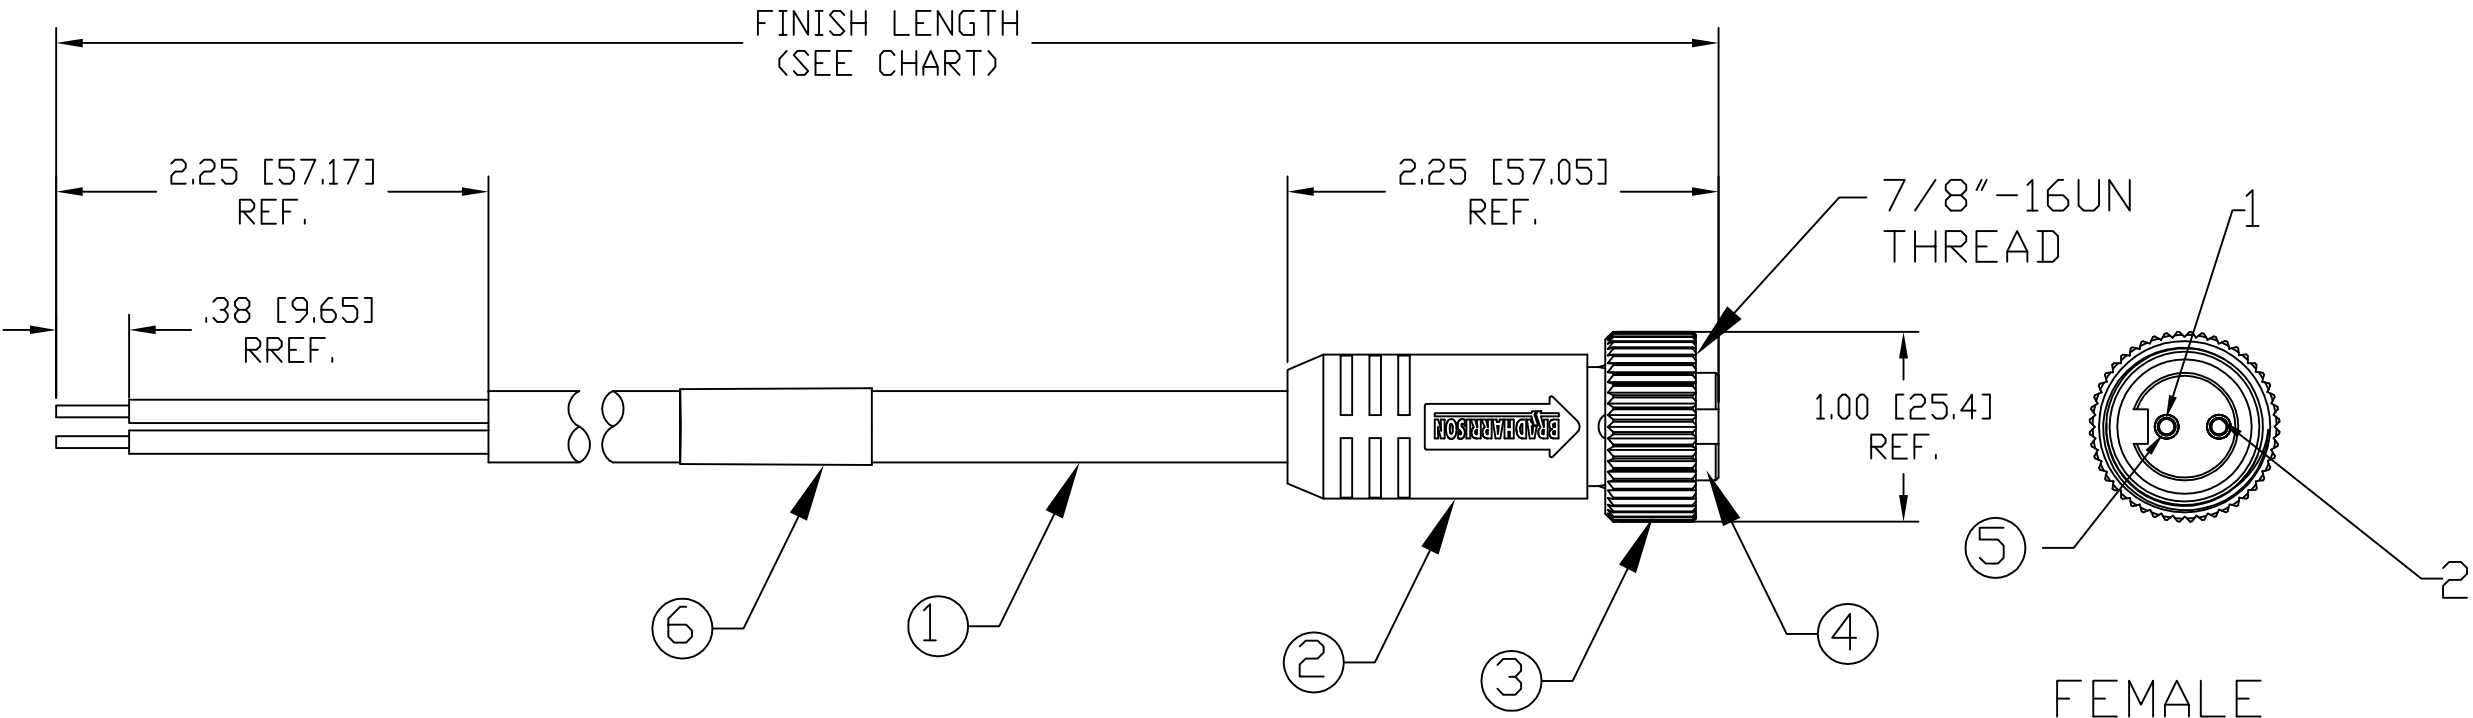


		13	12	11	10	9	8	7	6	5	4	3	2	1																
J		PART NUMBER	ENGINEERING NUMBER	FINISH LENGTH												J														
		1300060088	102000A01F030	3.00' +1.75" -0 [.9M +44.5 -0]																										
		1300060091	102000A01F060	6.00' +3.50" -0 [1.8M +88.9 -0]																										
I		1300060096	102000A01F120	12.00' +6.50" -0 [3.7M +165.1 -0]																										
		1300060099	102000A01F150	15.00' +6.50" -0 [4.6M +165.1 -0]																										
		1300060102	102000A01F200	20.00' +6.50" -0 [6.1M +165.1 -0]																										
		1300060105	10200A01F250	25.00' +12.50" -0 [7.6M +317.5 -0]																										
H		1300060108	102000A01F300	30.00' +12.50" -0 [9.1M +317.5 -0]																										
		1300060111	102000A01F400	40.00' +12.50" -0 [12.2M +317.5 -0]																										
		1300060112	102000A01F500	50.00' +24.50" -0 [15.2M +622.3 -0]																										
G		NOTE 1) MATERIAL: SEE TABLE 2) FINISHES: SEE TABLE 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE 4) MATES WITH: MINI CHANGE, 2 POLE RECEPTACLE 5) ELECTRICAL DATA: INLINE CORDSET FEMALE A-SIZE WITH FLYING LEADS 16AWG UNSHIELDED POLES: 2 MAX. VOLTAGE: 600V MAX. CURRENT 13A PROTECTION IP67 TEMPERATURE RANGE: -20°C TO 105°C 6) PACKAGING: CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG. 7)ASSEMBLY IS RoHS COMPLIANT. 8)CERTIFICATION UL RECOGNIZED, FILE NO. E152210 CSA CERTIFIED, FILE NO. LR6837													G															
F		 FINISH LENGTH (SEE CHART) 2.25 [57.17] REF. .38 [9.65] RREF. 2.25 [57.05] REF. 7/8"-16UN THREAD 1.00 [25.4] REF. FEMALE FACE VIEW 1 2 3 4 5 6 1 2 P1 <table><tr><td>1</td><td>WHITE</td></tr><tr><td>2</td><td>BLACK</td></tr></table> WIRING DIAGRAM													1	WHITE	2	BLACK	F											
1	WHITE																													
2	BLACK																													
E															E															
D															D															
C															C															
B		6	1	LABEL	PLASTIC FILM	BLACK/YELLOW	RELEASE EC NO: WNA2010-0025 DRWN: TWOLDEGE 7/9/09 CH'KD: BWOODMAN APPR: JFMURPHY 2009/08/10 REV QUALITY SYMBOL ▼=0 ▽=0 GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>±----</td><td>±---</td></tr><tr><td>3 PLACES</td><td>±.005</td><td>±.005</td></tr><tr><td>2 PLACES</td><td>±.013</td><td>±.010</td></tr><tr><td>1 PLACE</td><td>±.025</td><td>±.020</td></tr></table> ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS DIMENSION STYLE IN/MM DRAWN BY DATE TWOLDEGE 2009/07/09 CHECKED BY DATE BWOODMAN 2009/07/09 APPROVED BY DATE ---- MATERIAL NO. SEE CHART SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION SCALE 1:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION TITLE MINI CHANGE ASSEMBLY 2-POLE FEMALE ST 16/2AWG PVC MOLEX INCORPORATED DOCUMENT NO. SD-130006-007 SHEET NO. 1 OF 1									mm	INCH	4 PLACES	±----	±---	3 PLACES	±.005	±.005	2 PLACES	±.013	±.010	1 PLACE	±.025	±.020	B
	mm	INCH																												
4 PLACES	±----	±---																												
3 PLACES	±.005	±.005																												
2 PLACES	±.013	±.010																												
1 PLACE	±.025	±.020																												
		5	2	CONTACT SOCKET	COPPER ALLOY	GOLD PLATED																								
		4	1	INSERT	PVC	YELLOW																								
		3	1	COUPLING NUT	ZINC DIE CAST	BLACKE-COATED																								
		2	1	OVERMOLD	PVC	YELLOW																								
A		1	1	CABLE, 16AWG-2 TYPE STDOW	PVC	YELLOW									A															
		ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH																								
		13	12	11	10	9	8	7	6	5	4	3	2	1																

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9