

LAR


Snap-in Terminal Type, 105°C Permissible Overvoltage

- Withstanding 2000 hours application of rated ripple current at 105°C.
- Reduction of short incidence when overvoltage (rated voltage x 1.5) is applied to a capacitor.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).

LAR

Permissible
Overvoltage


LGU

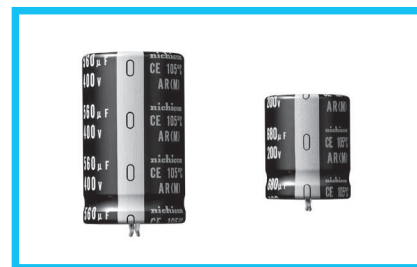


■ Specifications

Item	Performance Characteristics			
Category Temperature Range	− 40 to +105°C (200・250V), − 25 to +105°C (400・450V)			
Rated Voltage Range	200 to 450V			
Rated Capacitance Range	82 to 2200μF			
Capacitance Tolerance	± 20% at 120Hz, 20°C			
Leakage Current	I ≤ 3√CV (μA) (After 5 minutes' application of rated voltage [C: Rated Capacitance(μF), V: Voltage (V)])			
Tangent of loss angle (tan δ)	Rated voltage (V)	200 to 400	450	Measurement frequency : 120Hz at 20°C
	tan δ (MAX.)	0.15	0.20	
Stability at Low Temperature	Measurement frequency : 120Hz			
	Rated voltage(V)		200・250	400・450
	Impedance ratio	Z − 25°C / Z+20°C	3	8
	ZT/Z20(MAX.)	Z − 40°C / Z+20°C	12	—
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 2000 hours at 105°C, the peak voltage shall not exceed the rated voltage.		Capacitance change	Within ±20% of the initial capacitance value
			tan δ	200% or less than the initial specified value
			Leakage current	Less than or equal to the initial specified value
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the requirements listed at right.		Capacitance change	Within ±15% of the initial capacitance value
			tan δ	150% or less than the initial specified value
			Leakage current	Less than or equal to the initial specified value
Safety Performance	When overvoltage (rated voltage x 1.5, limited current = 1A) is applied to a capacitor, the pressure relief vent will operate normally more than 60% of the time without short and flame.			
Marking	Printed with white color letter on black sleeve.			

■ Drawing

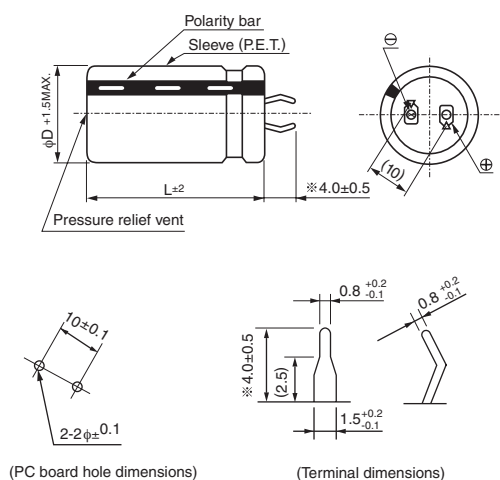

Type numbering system (Example : 400V 120μF)

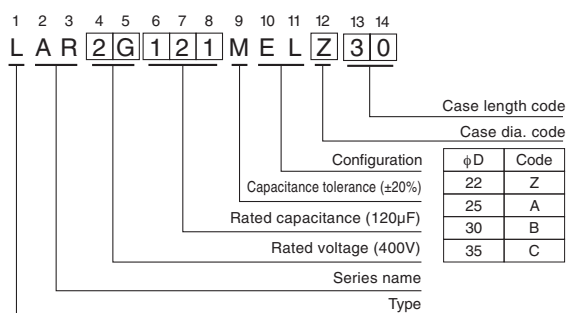

※ The other terminal is also available upon request.
 Please refer page 346 for schematic of dimensions.

● Frequency coefficient of rated ripple current

Frequency(Hz)	50	60	120	300	1k	10k	50k or more
coeff.	200.250V	0.81	0.85	1.00	1.17	1.32	1.45
	400.450V	0.77	0.82	1.00	1.16	1.30	1.41

Minimum order quantity : 50pcs.

● Dimension table in next page.

LAR

■ Dimensions

200V (2D)				
Cap. (μ F)	Size ϕ D $\times$ L (mm)	Rated ripple (mA _{rms})	Leakage Current (mA)	Code
390	22 $\times$ 25	1310	0.83	LAR2D391MELZ25
470	22 $\times$ 30	1480	0.91	LAR2D471MELZ30
	25 $\times$ 25	1480	0.91	LAR2D471MELA25
560	22 $\times$ 35	1600	1.00	LAR2D561MELZ35
680	22 $\times$ 40	1750	1.10	LAR2D681MELZ40
	25 $\times$ 30	1750	1.10	LAR2D681MELA30
	30 $\times$ 25	1750	1.10	LAR2D681MELB25
820	22 $\times$ 45	2040	1.21	LAR2D821MELZ45
	25 $\times$ 35	2040	1.21	LAR2D821MELA35
1000	22 $\times$ 50	2300	1.34	LAR2D102MELZ50
	25 $\times$ 45	2300	1.34	LAR2D102MELA45
	30 $\times$ 30	2300	1.34	LAR2D102MELB30
	35 $\times$ 25	2300	1.34	LAR2D102MELC25
1200	25 $\times$ 50	2650	1.46	LAR2D122MELA50
	30 $\times$ 35	2650	1.46	LAR2D122MELB35
	35 $\times$ 30	2650	1.46	LAR2D122MELC30
1500	30 $\times$ 40	2800	1.64	LAR2D152MELB40
	35 $\times$ 35	2800	1.64	LAR2D152MELC35
1800	30 $\times$ 50	3080	1.80	LAR2D182MELB50
	35 $\times$ 40	3080	1.80	LAR2D182MELC40
2200	35 $\times$ 45	3480	1.98	LAR2D222MELC45

250V (2E)				
Cap. (μ F)	Size ϕ D $\times$ L (mm)	Rated ripple (mA _{rms})	Leakage Current (mA)	Code
270	22 $\times$ 25	1100	0.77	LAR2E271MELZ25
330	22 $\times$ 30	1200	0.86	LAR2E331MELZ30
	25 $\times$ 25	1200	0.86	LAR2E331MELA25
390	22 $\times$ 35	1300	0.93	LAR2E391MELZ35
	25 $\times$ 30	1300	0.93	LAR2E391MELA30
470	22 $\times$ 40	1400	1.02	LAR2E471MELZ40
	25 $\times$ 35	1400	1.02	LAR2E471MELA35
	30 $\times$ 25	1400	1.02	LAR2E471MELB25
560	22 $\times$ 45	1500	1.12	LAR2E561MELZ45
	25 $\times$ 35	1500	1.12	LAR2E561MELA35
	30 $\times$ 30	1500	1.12	LAR2E561MELB30
680	22 $\times$ 50	1700	1.23	LAR2E681MELZ50
	25 $\times$ 40	1700	1.23	LAR2E681MELA40
	30 $\times$ 30	1700	1.23	LAR2E681MELB30
	35 $\times$ 25	1700	1.23	LAR2E681MELC25
820	25 $\times$ 45	2000	1.35	LAR2E821MELA45
	30 $\times$ 35	2000	1.35	LAR2E821MELB35
	35 $\times$ 30	2000	1.35	LAR2E821MELC30
1000	30 $\times$ 40	2200	1.50	LAR2E102MELB40
	35 $\times$ 35	2200	1.50	LAR2E102MELC35
1200	30 $\times$ 45	2300	1.64	LAR2E122MELB45
	35 $\times$ 40	2300	1.64	LAR2E122MELC40
1500	35 $\times$ 45	2500	1.83	LAR2E152MELC45
1800	35 $\times$ 50	2700	2.01	LAR2E182MELC50

400V (2G)				
Cap. (μ F)	Size ϕ D $\times$ L (mm)	Rated ripple (mA _{rms})	Leakage Current (mA)	Code
100	22 $\times$ 25	680	0.60	LAR2G101MELZ25
120	22 $\times$ 30	730	0.65	LAR2G121MELZ30
180	22 $\times$ 35	950	0.80	LAR2G181MELZ35
	25 $\times$ 30	950	0.80	LAR2G181MELA30
	30 $\times$ 25	950	0.80	LAR2G181MELB25
220	22 $\times$ 45	1100	0.88	LAR2G221MELZ45
	25 $\times$ 35	1100	0.88	LAR2G221MELA35
	30 $\times$ 25	1100	0.88	LAR2G221MELB25
270	22 $\times$ 50	1220	0.98	LAR2G271MELZ50
	25 $\times$ 40	1220	0.98	LAR2G271MELA40
	30 $\times$ 30	1220	0.98	LAR2G271MELB30
	35 $\times$ 25	1220	0.98	LAR2G271MELC25
330	25 $\times$ 45	1440	1.08	LAR2G331MELA45
	30 $\times$ 35	1440	1.08	LAR2G331MELB35
390	25 $\times$ 50	1550	1.18	LAR2G391MELA50
	30 $\times$ 40	1550	1.18	LAR2G391MELB40
	35 $\times$ 30	1550	1.18	LAR2G391MELC30
470	30 $\times$ 45	1680	1.30	LAR2G471MELB45
	35 $\times$ 35	1680	1.30	LAR2G471MELC35
560	30 $\times$ 50	1900	1.41	LAR2G561MELB50
	35 $\times$ 40	1900	1.41	LAR2G561MELC40
680	35 $\times$ 45	2120	1.56	LAR2G681MELC45

450V (2W)				
Cap. (μ F)	Size ϕ D $\times$ L (mm)	Rated ripple (mA _{rms})	Leakage Current (mA)	Code
82	22 $\times$ 25	340	0.57	LAR2W820MELZ25
100	22 $\times$ 30	690	0.63	LAR2W101MELZ30
	25 $\times$ 25	690	0.63	LAR2W101MELA25
120	22 $\times$ 35	720	0.69	LAR2W121MELZ35
	25 $\times$ 30	720	0.69	LAR2W121MELA30
150	22 $\times$ 40	790	0.77	LAR2W151MELZ40
	25 $\times$ 30	790	0.77	LAR2W151MELA30
	30 $\times$ 25	790	0.77	LAR2W151MELB25
	22 $\times$ 45	870	0.85	LAR2W181MELZ45
180	25 $\times$ 35	870	0.85	LAR2W181MELA35
	30 $\times$ 30	870	0.85	LAR2W181MELB30
220	25 $\times$ 40	1050	0.94	LAR2W221MELA40
	30 $\times$ 30	1050	0.94	LAR2W221MELB30
	35 $\times$ 25	1050	0.94	LAR2W221MELC25
270	25 $\times$ 50	1230	1.04	LAR2W271MELA50
	30 $\times$ 35	1230	1.04	LAR2W271MELB35
	35 $\times$ 30	1230	1.04	LAR2W271MELC30
330	30 $\times$ 40	1380	1.15	LAR2W331MELB40
	35 $\times$ 35	1380	1.15	LAR2W331MELC35
390	30 $\times$ 50	1610	1.25	LAR2W391MELB50
	35 $\times$ 40	1610	1.25	LAR2W391MELC40
470	35 $\times$ 45	1780	1.37	LAR2W471MELC45
560	35 $\times$ 50	1990	1.50	LAR2W561MELC50

Rated ripple current (mA_{rms}) at 105°C 120Hz

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9