

## IEC Appliance Inlet C20 with Circuit Breaker TA35 1-pole



Rocker black  
Lettering white, non-illuminated  
Snap-in mounting from front side



Rocker red  
illuminated  
Snap-in mounting from front side



Rocker green  
illuminated  
Snap-in mounting from front side



See below:  
[Approvals and Compliances](#)

### Description

- Panel mount :  
Snap-in version from front side
- 2 Functions :  
Appliance Inlet , Protection class I , Circuit breaker type TA35 , 1-pole
- Quick connect terminals 6.3 x 0.8 mm

### Characteristics

- Unwired
- Switch non-illuminated or illuminated
- Suitable for use in equipment according to IEC/UL 60950

### Other versions on request

- Pre-wired version
- Quick connect terminals 4.8 x 0.8 mm
- Protection class II, 70°C

### References

Alternative: version for 10 A (15 A) [6135](#)  
Substitute for type [1624-K](#)

### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#), [Landing Page](#)

Newly available variants corresponding to V-Lock mating cordset. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset.

### Technical Data

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Ratings IEC                       | 16 A / 250 VAC; 50 Hz                                              |
| Ratings UL/CSA                    | 20 A / 250 VAC; 60 Hz                                              |
| Dielectric Strength               | > 2.5 kVAC between L-N<br>> 3 kVAC between L/N-PE<br>(1 min/50 Hz) |
| Allowable Operation Temperature   | -25 °C to 60 °C                                                    |
| IP-Protection                     | from front side IP40 acc. to IEC 60529                             |
| Protection against electric shock | Suitable for appliances with protection class I acc. to IEC 61140  |
| Terminal                          | Quick connect terminals 6.3 x 0.8 mm                               |
| Panel Thickness S                 | Snap-in: 1.5/2/2.5 mm                                              |
| Material: Housing                 | Thermoplastic, black, UL 94V-0                                     |

|                         |                                                                                                                                                |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| appliance inlet/-outlet | C20 acc. to IEC 60320-1, UL 60320-1, CSA C22.2 no. 60320-1 (for cold conditions) pin-temperature 70 °C, 16 A, Protection Class I               |
| Circuit Breakers        | Acc. IEC/EN 60934, UL 1077, CSA 22.2 no. 235<br>1-pole rocker switch, illuminated or non-illuminated.<br>Conditional short circuit Inc: 2000 A |

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.  
Approval Reference Type: 6136

| Approval Logo                                                                    | Certificates                  | Certification Body | Description                              |
|----------------------------------------------------------------------------------|-------------------------------|--------------------|------------------------------------------|
|  | <a href="#">VDE Approvals</a> | VDE                | Certificate Number: 40025196             |
|  | <a href="#">UL Approvals</a>  | UL                 | UL File Number: E96454                   |
|  | <a href="#">CCC Approvals</a> | CCC                | CCC Certificate Number: 2015180204000153 |

Product standards

Product standards that are referenced

| Organization                                                                     | Design                | Standard              | Description                                                           |
|----------------------------------------------------------------------------------|-----------------------|-----------------------|-----------------------------------------------------------------------|
|  | Designed according to | IEC 60320-1           | Appliance couplers for household and similar general purposes         |
|  | Designed according to | UL 60320-1            | Standard for Attachment Plugs and Receptacles                         |
|  | Designed according to | CSA C22.2 no. 60320-1 | General Use Receptacles, Attachment Plugs, and Similar Wiring Devices |

Application standards

Application standards where the product can be used


| Organization                                                                     | Design                         | Standard     | Description                                                                                     |
|----------------------------------------------------------------------------------|--------------------------------|--------------|-------------------------------------------------------------------------------------------------|
|  | Designed for applications acc. | IEC/UL 60950 | IEC 60950-1 includes the basic requirements for the safety of information technology equipment. |

Compliances

The product complies with following Guide Lines


| Identification                                                                     | Details                                      | Initiator   | Description                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------|----------------------------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <a href="#">CE declaration of conformity</a> | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.                        |
|  | <a href="#">RoHS</a>                         | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                                           |
|  | <a href="#">China RoHS</a>                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                                         |
|  | <a href="#">REACH</a>                        | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                                                      |
|  | <a href="#">Landing Page V-Lock</a>          | SCHURTER AG | V-Lock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset. |

Dimensions [mm]

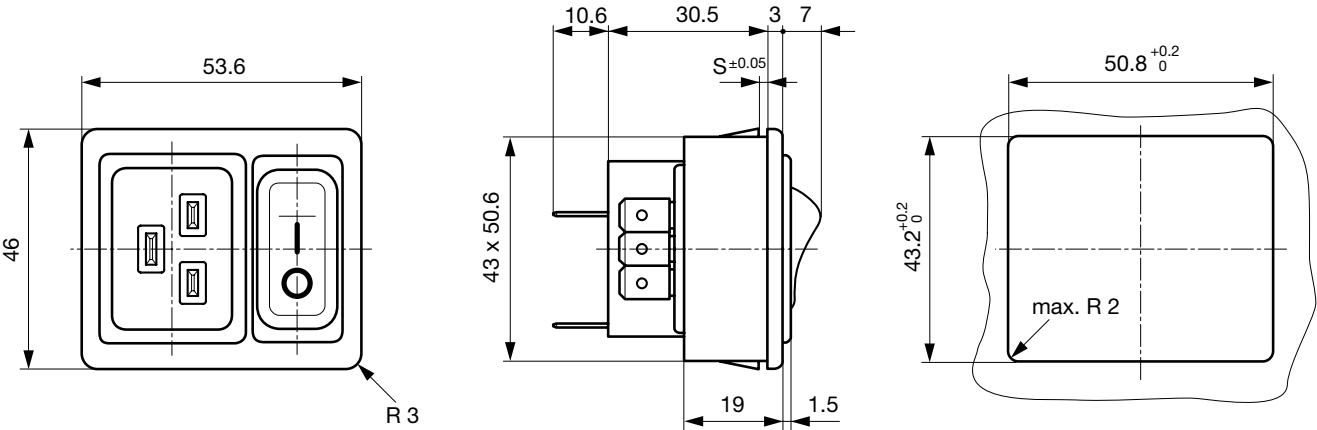


## Diagrams

non-illuminated




illuminated (connection N' to L)



## Time-Current-Curves


Tripping Characteristics  $I_n < 3\text{ A}$

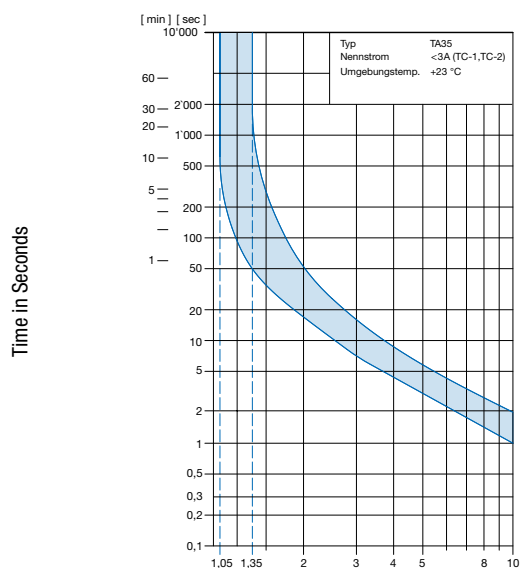

Multiple of Rated Current  $I_n$

Reference Temperature  $+23^\circ$

Tripping Characteristics  $I_n 3 - 20\text{ A}$

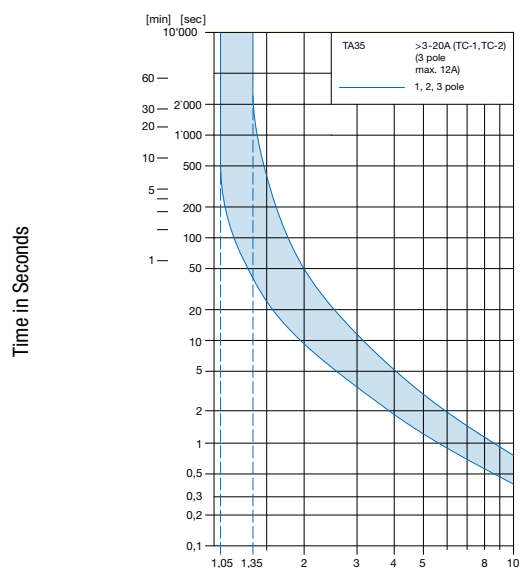

Multiple of Rated Current  $I_n$

Reference Temperature  $+23^\circ$

Configuration code TA35

| Type | Configuration code TA35 |   |   |   |   |   |   |   |   |   |   |     |   |   |   |   |   |   |    |   |    |
|------|-------------------------|---|---|---|---|---|---|---|---|---|---|-----|---|---|---|---|---|---|----|---|----|
| 6136 | C                       | F | T | W | F | 1 | 2 | 0 | C | 0 | - | 000 | - | 1 | 1 | 1 | 1 | - | 10 | - | 00 |

No other features

Rated current  $I_n$  (A)

| $I_n$ | Code | $I_n$ | Code |
|-------|------|-------|------|
| 1,0   | J10  | 8,0   | 080  |
| 2,0   | J20  | 10,0  | 100  |
| 4,0   | 040  | 12,0  | 120  |
| 5,0   | 050  | 15,0  | 150  |
| 6,0   | 060  | 16,0  | 160  |
|       |      | 20,0  | 200* |


Other rated currents on request

\*) UL / CSA only

Rocker legend

| Surface    | Illustration | Colour of print | Position of the rocker legend e.g. F |
|------------|--------------|-----------------|--------------------------------------|
| F embossed |              |                 |                                      |
| H printed  |              | white           |                                      |
| K printed  |              | black           |                                      |
| L printed  |              | white           |                                      |
| M printed  |              | black           |                                      |

Other legends on request




Colours

|   | Switch front | Rocker non-illuminated | illuminated        |
|---|--------------|------------------------|--------------------|
| W | black        | white                  | —                  |
| B | black        | black                  | —                  |
| 3 | black        | —                      | red transparent    |
| 4 | black        | —                      | green transparent  |
| 6 | black        | —                      | orange transparent |

Other colours on request

Number of switched poles  
Number of protected poles

1-pole  
1

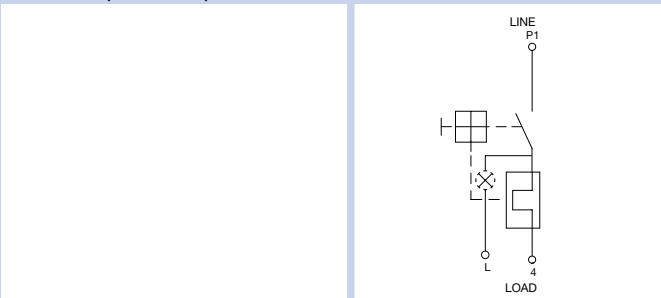

|        |                      |                |            |
|--------|----------------------|----------------|------------|
| Switch | without illumination |                | CFT        |
| Switch | illuminated          | 240 V<br>120 V | C2F<br>C4F |

Other versions on request

### Configuration code (Order example)

| Type | Configuration code TA35 |   |   |   |   |   |   |   |   |   |     |   |   |   |   |    |    |
|------|-------------------------|---|---|---|---|---|---|---|---|---|-----|---|---|---|---|----|----|
| 6136 | C                       | F | T | W | F | 1 | 2 | 0 | C | 0 | 000 | 1 | 1 | 1 | 1 | 10 | 00 |

## Cord Retention

**0 Without**

## 1 V-Lock

## Mounting

1 Snap-in  $s = 1.0$  mm

**2 Snap-in  $s = 1.5$  mm**

**3 Snap-in  $s = 2.0$  mm**

4 Snap-in  $s = 2.5$  mm

### Terminal PE

**1 Quick connect terminals 6.3 x 0.8 mm**

### Terminal N

**1** Quick connect 6.3 x 0.8 mm

## Terminal L

1 Quick connect 6.3 x 0.8 mm

#### 4 Wire connection to circuit breaker

Packaging unit 15 Pcs

Mating Outlets/Connectors

Category / Description



[Connector Overview complete](#)

|                                                                     |       |
|---------------------------------------------------------------------|-------|
| 4795, Mounting: Power Cord, Cable Connector: IEC C19                | 4795  |
| 4790, Mounting: Power Cord, Screw Connector: IEC C19                | 4790  |
| 0104U, Mounting: Power Supply Cord, Screw clamps Connector: IEC C19 | 0104U |

[Connector further types to 6136](#)



[Power Supply Cord Overview complete](#)

|                                                                                |           |
|--------------------------------------------------------------------------------|-----------|
| Cord Sets 16 A, Europlug, 2.5 m, Connector IEC C19, H05VV-F3G1.5, black        | 6004.0395 |
| Cord Sets 16 A, Interconnection, 1.0 m, Connector IEC C19, H05VV-F3G1.5, black | 6020.0392 |
| Cord Sets 16 A, Interconnection, 2.0 m, Connector IEC C19, H05VV-F3G1.5, black | 6020.0394 |
| Cord Sets 16 A, North America, 2.5 m, Connector IEC C19, SJT 3x14 AWG, black   | 6009.5195 |

[Power Supply Cord further types to 6136](#)

Mating Outlets/Connectors shuttered



[Power Cord Overview complete](#)

|                                                                                     |         |
|-------------------------------------------------------------------------------------|---------|
| VAC19KS, Overview, V-Lock cord retaining, diverse Connector IEC C19, diverse, black | VAC19KS |
|-------------------------------------------------------------------------------------|---------|

[Power Cord further types to 6136](#)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9