

FEATURES

- Low Cost
- Multiple Package Styles
- Internal Input and Output
- Filtering
- Non-Conductive Case
- High Output Power Density:
10 Watts/Inch³
- Extended Temperature Range:
-25°C to +85°C
- Efficiency to 79%
- RoHS Compliant

NOT RECOMMENDED FOR NEW DESIGNS
 See product selection chart
 for alternatives



The HPR1XXC Series uses advanced circuit design and packaging technology to deliver superior reliability and performance. A 170kHz push-pull oscillator is used in the input stage. Beat-frequency oscillation problems are reduced when using the HPR1XXC Series with high frequency isolation amplifiers.

Reduced parts count and high efficiency add to the reliability of the HPR1XXC Series. The high efficiency of the HPR1XXC Series means less internal power dissipation, as low as 190mW.

With reduced heat dissipation the HPR1XXC Series can operate at higher temperatures with no degradation. In addition, the high efficiency of the HPR1XXC Series means the series is able to offer greater than 10 W/inch³ of output power density. Operation down to no load will not impact the reliability of the series, although a ≥ 1 mA minimum load is needed to realize published specifications.

The HPR1XXC Series provides the user a low cost converter without sacrificing reliability. The use of surface mounted devices and advanced manufacturing technologies make it possible to offer premium performance and low cost.

SPECIFICATIONS All specifications are typical at $T_A = +25^\circ\text{C}$ nominal input voltage unless otherwise specified.

PRODUCT SELECTION CHART

Model	Nominal Input Voltage	Rated Output Voltage	Rated Output Current	Input Current		Reflected Ripple Current	Efficiency	Recommended Alternatives	
	V _{DC}	V _{DC}	mA	No Load	Rated Load				
				mA		mAp-p	%		
NOT RECOMMENDED FOR NEW DESIGNS	HPR100C	5	5	150	20	216	10	69	NMR100C / MER1S0505SC
	HPR101C	5	12	62	20	212	5	70	NMR101C / MER1S0512SC
	HPR102C	5	15	50	20	212	5	71	NMR102C / MER1S0515SC
	HPR103C	5	±5	±75	20	218	5	68	NMA0505SC / MEA1D0505SC
	HPR104C	5	±12	±30	20	212	5	68	NMA0512SC / MEA1D0512SC
	HPR105C	5	±15	±25	20	200	5	75	NMA0515SC / MEA1D0515SC
	HPR106C	12	5	150	10	90	5	69	NMR106C / MER1S1205SC
	HPR107C	12	12	62	10	81	5	77	NMR107C / MER1S1212SC
	HPR110C	12	±12	±30	10	81	5	74	NMA1212SC / MEA1D1212SC
	HPR111C	12	±15	±25	10	81	5	77	NMA1215SC / MEA1D1215SC
	HPR112C	15	5	150	8	72	5	69	MER1S1505SC
	HPR113C	15	12	62	8	72	5	69	MER1S1512SC
	HPR116C	15	±12	±30	8	63	5	76	MEA1D1512SC
	HPR117C	15	±15	±25	8	63	5	79	MEA1D1515SC
	HPR118C	24	5	150	8	48	15	65	MER1S2405SC
	HPR120C	24	15	50	8	45	15	76	MER1S2415SC
	HPR122C	24	±12	±30	8	45	15	67	MEA1D2412SC
	HPR123C	24	±15	±25	8	45	15	69	MEA1D2415SC
OBSOLETE	HPR108C	12	15	50	10	81	5	77	NMR108C / MER1S1215SC
	HPR109C	12	±5	±75	10	88	5	71	NMA1205SC / MEA1D1205SC
	HPR114C	15	15	50	8	72	5	69	MER1S1515SC
	HPR115C	15	±5	±75	8	72	5	69	MEA1D1505SC
	HPR119C	24	12	62	8	48	15	65	MER1S2412SC
HPR121C	24	±5	±75	8	45	15	69	MEA1D2405SC	



For full details go to
www.murata-ps.com/rohs

SPECIFICATIONS, ALL MODELS

Specifications are at $T_A = +25^\circ\text{C}$ nominal input voltage unless otherwise specified.

	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT	INPUT					
	Voltage Range		4.5	5	5.5	VDC
			10.8	12	13.2	VDC
			13.5	15	16.5	VDC
		21.6	24	26.4	VDC	
	Voltage Rise Time See Typical Performance Curves & Application Notes: "Capacitive Loading Effects on Start-Up of DC/DC Converters"					
OUTPUT	OUTPUT					
	Rated Power				750	mW
	Voltage Setpoint Accuracy	Rated Load, Nominal V_{IN}			± 5	%
	Ripple & Noise	BW = DC to 10MHz		150	200	mVp-p
		BW = 10Hz to 2MHz		30	40	mVrms
	Voltage (Over Input Voltage Range)	1mA to Rated Current, $V_{OUT} = 5V$		4.75	7	VDC
		1mA to Rated Current, $V_{OUT} = 12V$		11.40	15	VDC
		1mA to Rated Current, $V_{OUT} = 15V$		14.25	18	VDC
	Temperature Coefficient			.01	.05	%/°C
	REGULATION	REGULATION				
Load Regulation (All other modes)		Rated Load to 1mA Load		3		%
GENERAL	GENERAL					
	ISOLATION					
	Rated Voltage		750			VDC
	Test Voltage	60 Hz, 10 Seconds	750			Vrms
	Resistance		10			GΩ
	Capacitance			25	100	pF
	Leakage Current	$V_{ISO} = 240\text{VAC}, 60\text{Hz}$		2	8.5	μArms
	Switching Frequency			170		kHz
	Frequency Change	Over Line and Load		24		%
	Package Weight				3	g
	MTTF per MIL-HDBK-217, Rev. F*	Circuit Stress Method				
	Ground Benign	$T_A = +25^\circ\text{C}$	7.9			MHr
	Fixed Ground	$T_A = +35^\circ\text{C}$	1.9			MHr
	Naval Sheltered	$T_A = +35^\circ\text{C}$	1.2			MHr
	Airborne Uninhabited Fighter	$T_A = +35^\circ\text{C}$	300			kHr
	TEMPERATURE					
Specification		-25	+25	+85	°C	
Operation		-40		+100	°C	
Storage		-40		+110	°C	

SOLDERING INFORMATION


The HPR1XXC devices are intended for wave soldering or manual soldering.

They are not intended to be subject to surface mount processes under any circumstances.


The normal wave soldering process can be used with these devices where the device is subjected to a maximum wave temperature of 260°C for a period of no more than 10 seconds. Within this time and temperature range, the integrity of the device's plastic body will not be compromised and internal temperatures within the converter will not exceed 175°C . Care should be taken to control manual soldering limits identical to that of wave soldering.

TYPICAL PERFORMANCE CURVES

Specifications are at $T_A = +25^\circ\text{C}$ nominal input voltage and nominal load.

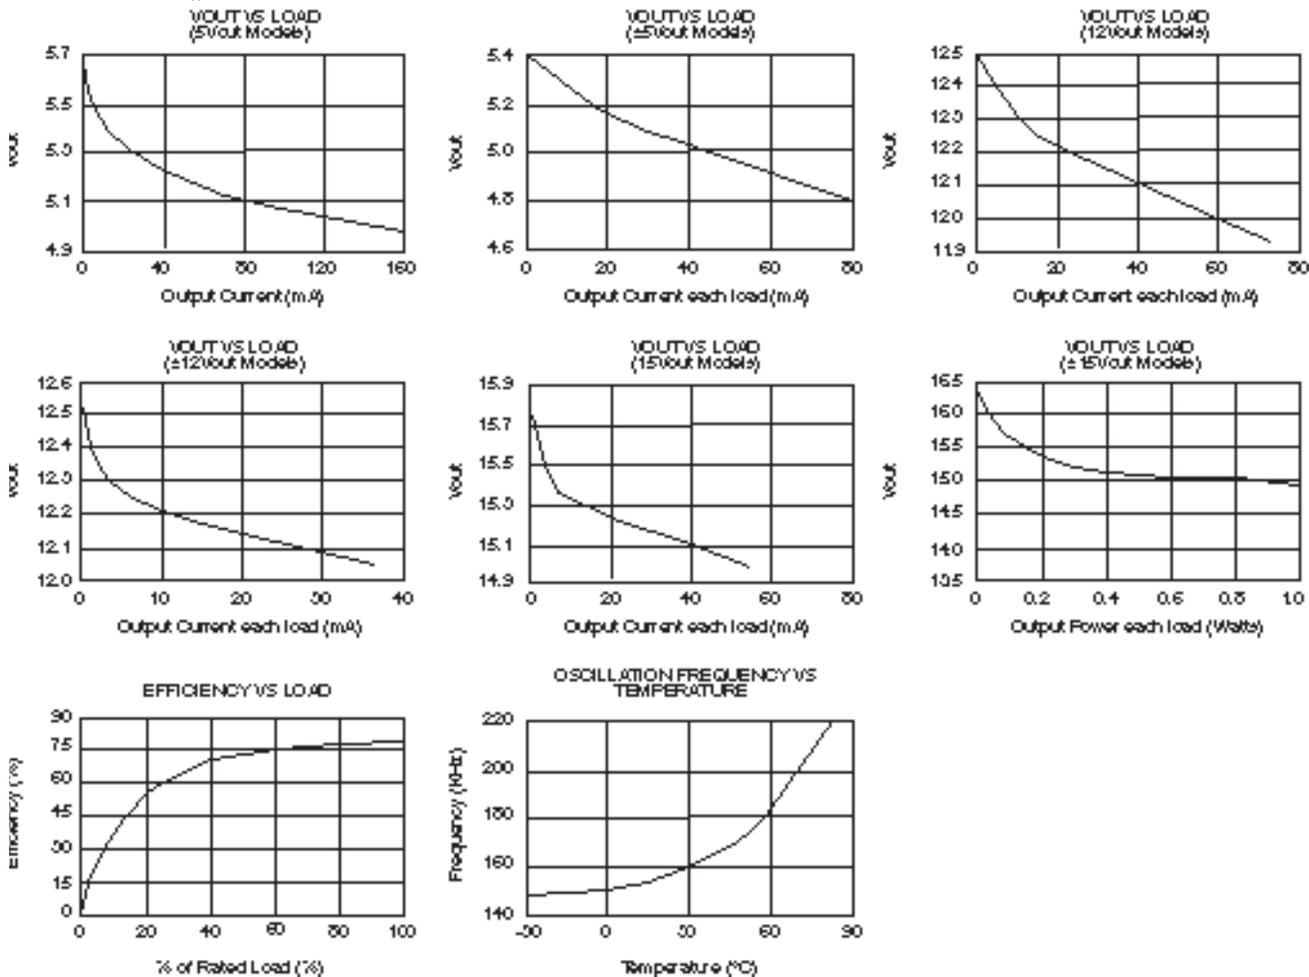

SAFE OPERATING AREA

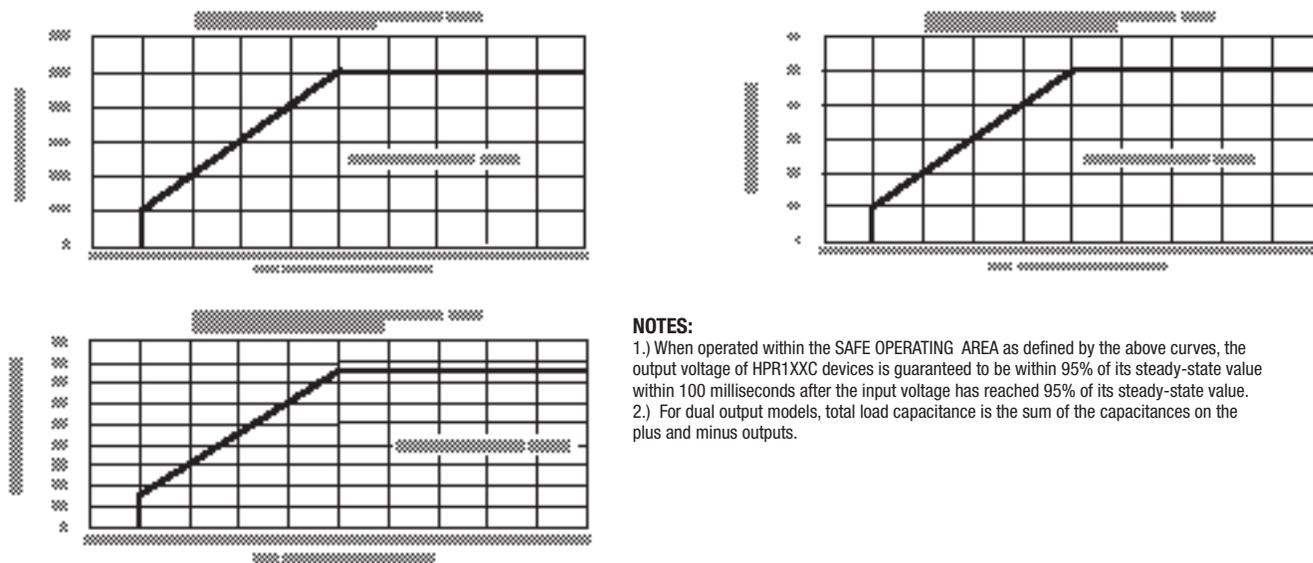

NOTES:

- 1.) When operated within the SAFE OPERATING AREA as defined by the above curves, the output voltage of HPR1XXC devices is guaranteed to be within 95% of its steady-state value within 100 milliseconds after the input voltage has reached 95% of its steady-state value.
- 2.) For dual output models, total load capacitance is the sum of the capacitances on the plus and minus outputs.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9