

| PRODUCT NUMBER | DESCRIPTION | NOTES |
|------------------|------------------|------------|
| 10117950-XXXXLF | NON-HF | SEE SHT. 3 |
| 10117950-XXXXHLF | HALOGEN FREE (H) | SEE SHT. 3 |



| | | | | | | | | |
|---------------------|----------------|------------|---|-----|-----------|------------------------|-----------------|--------------|
| dr | Deborah Ingram | 2011/11/16 | projection | mm | size | A3 | scale | 4:5 |
| eng | Tom Feng | 2016/06/15 | | | ecn no | ELX-N-24288-1 | | |
| chr | - | - | | | rel level | Released | | |
| appr | Michael Zhou | 2016/09/22 | product family | C&A | | | | |
| Amphenol FCI | | | FINAL ASSEMBLY (PASSIVE) MSAS HD 8X ASSEMBLY (12 Gbps) | | | dwg no 10117950 | rev E | |
| www.fci.com | | | cat. no. | - | | Product - Customer Drw | | sheet 1 of 4 |

| | |
|------------------|------------------|
| PRODUCT NUMBER | DESCRIPTION |
| 10117950-XXXXLF | NON-HF |
| 10117950-XXXXHLF | HALOGEN FREE (H) |


P1-(A) TO P2-(A)
P1-(B) TO P2-(B)

WIRING LIST (SEE NOTE 6)

| END P1 / (A) (B) | | END P2 / (A) (B) | |
|------------------|----------|------------------|----------|
| POSITION | SYMBOL | POSITION | SYMBOL |
| D9 | GROUND | B9 | GROUND |
| D8 | Tx2- | B8 | Rx2- |
| D7 | Tx2+ | B7 | Rx2+ |
| D6 | GROUND | B6 | GROUND |
| D5 | Tx0- | B5 | Rx0- |
| D4 | Tx0+ | B4 | Rx0+ |
| D3 | GROUND | B3 | GROUND |
| D2 | Vman | B2 | ModPrsL |
| D1 | Vact | B1 | Vact |
| C1 | SCL | A1 | Reserved |
| C2 | SDA | A2 | IntL |
| C3 | GROUND | A3 | GROUND |
| C4 | Tx1+ | A4 | Rx1+ |
| C5 | Tx1- | A5 | Rx1- |
| C6 | GROUND | A6 | GROUND |
| C7 | Tx3+ | A7 | Rx3+ |
| C8 | Tx3- | A8 | Rx3- |
| C9 | GROUND | A9 | GROUND |
| B9 | GROUND | D9 | GROUND |
| B8 | Rx2- | D8 | Tx2- |
| B7 | Rx2+ | D7 | Tx2+ |
| B6 | GROUND | D6 | GROUND |
| B5 | Rx0- | D5 | Tx0- |
| B4 | Rx0+ | D4 | Tx0+ |
| B3 | GROUND | D3 | GROUND |
| B2 | ModPrsL | D2 | Vman |
| B1 | Vact | D1 | Vact |
| A1 | Reserved | C1 | SCL |
| A2 | IntL | C2 | SDA |
| A3 | GROUND | C3 | GROUND |
| A4 | Rx1+ | C4 | Tx1+ |
| A5 | Rx1- | C5 | Tx1- |
| A6 | GROUND | C6 | GROUND |
| A7 | Rx3+ | C7 | Tx3+ |
| A8 | Rx3- | C8 | Tx3- |
| A9 | GROUND | C9 | GROUND |



VIEW A (END P1)
SCALE 6:1

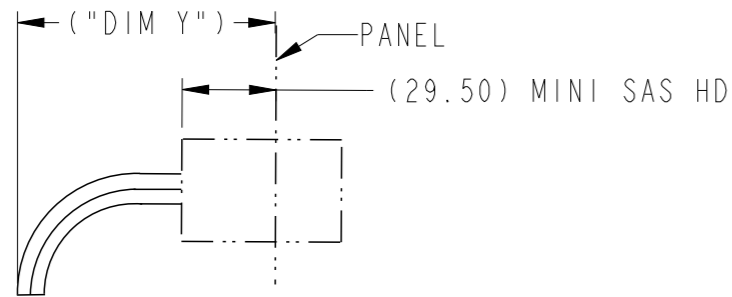

BEND RADIUS
TOP VIEW OF CONNECTOR

| MINI SAS HD MINIMUM CABLE BEND TABLE | | |
|---|-----------------|-----------------------|
| CABLE | ("DIM Y") HF | ("DIM Y") (NON-HF) |
| 24 AWG | 101.2 | 101.2 |
| 26 AWG | 95 | 92.2 |
| 28 AWG | 88 | 85.2 |
| 30 AWG | 83.8 | 79.6 |

LENGEND:

| | |
|--|--------------------------------------|
| | HIGH-SPEED SERIAL DIFFERENTIAL PAIRS |
| | SIGNAL RETURN |
| | POWER AND MANAGEMENT INTERFACE |

SHIELD-----SHIELD

| | | | | | | | | |
|---------------------|----------------|------------|--------------------------|-----|--------|------------------------|-----------|----------|
| dr | Deborah Ingram | 2011/11/16 | projection | mm | size | A3 | scale | 1:1 |
| eng | Tom Feng | 2016/06/15 | | ← → | ecn no | ELX-N-24288-1 | rel level | Released |
| chr | - | - | | | | | | |
| appr | Michael Zhou | 2016/09/22 | product family | C&A | | | | |
| Amphenol FCI | | | FINAL ASSEMBLY (PASSIVE) | | | dwg no 10117950 | | rev E |
| www.fci.com | | | cat. no. | | | Product - Customer Drw | | |

| △ PART NUMBER (NON-HALOGEN FREE) SEE NOTE 12 AND 16 | LENGTH "DIM L" (Meters) | LENGTH "DIM N" (Meters) | ("DIM M") (mm) | AWG |
|---|----------------------------|----------------------------|-------------------|-----|
| 10117950-2004LF | (0.43) | 0.33 | 17.3 | 30 |
| 10117950-2005LF | 0.5 | | 17.3 | 30 |
| 10117950-2010LF | 1.0 | | 17.3 | 30 |
| 10117950-2015LF | 1.5 | | 17.3 | 30 |
| 10117950-2020LF | 2.0 | | 17.3 | 30 |
| 10117950-3010LF | 1.0 | | 17.3 | 28 |
| 10117950-3015LF | 1.5 | | 17.3 | 28 |
| 10117950-3020LF | 2.0 | | 17.3 | 28 |
| 10117950-3025LF | 2.5 | | 17.3 | 28 |
| 10117950-3030LF | 3.0 | | 17.3 | 28 |
| 10117950-4010LF | 1.0 | | 20.1 | 26 |
| 10117950-4015LF | 1.5 | | 20.1 | 26 |
| 10117950-4020LF | 2.0 | | 20.1 | 26 |
| 10117950-4025LF | 2.5 | | 20.1 | 26 |
| 10117950-4030LF | 3.0 | | 20.1 | 26 |
| 10117950-4035LF | 3.5 | | 20.1 | 26 |
| 10117950-4040LF | 4.0 | | 20.1 | 26 |
| 10117950-4045LF | 4.5 | | 20.1 | 26 |
| 10117950-4050LF | 5.0 | | 20.1 | 26 |
| 10117950-4055LF | 5.5 | | 20.1 | 26 |
| 10117950-4060LF | 6.0 | | 20.1 | 26 |
| 10117950-5010LF | 1.0 | | 20.1 | 24 |
| 10117950-5015LF | 1.5 | | 20.1 | 24 |
| 10117950-5020LF | 2.0 | | 20.1 | 24 |
| 10117950-5025LF | 2.5 | | 20.1 | 24 |
| 10117950-5030LF | 3.0 | | 20.1 | 24 |
| 10117950-5035LF | 3.5 | | 20.1 | 24 |
| 10117950-5040LF | 4.0 | | 20.1 | 24 |
| 10117950-5045LF | 4.5 | | 20.1 | 24 |
| 10117950-5050LF | 5.0 | | 20.1 | 24 |
| 10117950-5055LF | 5.5 | | 20.1 | 24 |
| 10117950-5060LF | 6.0 | | 20.1 | 24 |
| 10117950-5065LF | 6.5 | | 20.1 | 24 |
| 10117950-5070LF | 7.0 | | 20.1 | 24 |
| 10117950-5075LF | 7.5 | | 20.1 | 24 |
| 10117950-5080LF | 8.0 | | 20.1 | 24 |

| △ PART NUMBER (HALOGEN FREE) SEE NOTE 11 AND 16 | LENGTH "DIM L" (Meters) | LENGTH "DIM N" (Meters) | ("DIM M") (mm) | AWG |
|--|----------------------------|----------------------------|-------------------|-----|
| 10117950-2004HLF | (0.43) | 0.33 | 17.3 | 30 |
| 10117950-2005HLF | 0.5 | | 17.3 | 30 |
| 10117950-2010HLF | 1.0 | | 17.3 | 30 |
| 10117950-2015HLF | 1.5 | | 17.3 | 30 |
| 10117950-2020HLF | 2.0 | | 17.3 | 30 |
| 10117950-3010HLF | 1.0 | | 17.3 | 28 |
| 10117950-3015HLF | 1.5 | | 17.3 | 28 |
| 10117950-3020HLF | 2.0 | | 17.3 | 28 |
| 10117950-3025HLF | 2.5 | | 17.3 | 28 |
| 10117950-3030HLF | 3.0 | | 17.3 | 28 |
| 10117950-4010HLF | 1.0 | | 20.1 | 26 |
| 10117950-4015HLF | 1.5 | | 20.1 | 26 |
| 10117950-4020HLF | 2.0 | | 20.1 | 26 |
| 10117950-4025HLF | 2.5 | | 20.1 | 26 |
| 10117950-4030HLF | 3.0 | | 20.1 | 26 |
| 10117950-4035HLF | 3.5 | | 20.1 | 26 |
| 10117950-4040HLF | 4.0 | | 20.1 | 26 |
| 10117950-4045HLF | 4.5 | | 20.1 | 26 |
| 10117950-4050HLF | 5.0 | | 20.1 | 26 |
| 10117950-4055HLF | 5.5 | | 20.1 | 26 |
| 10117950-4060HLF | 6.0 | | 20.1 | 26 |
| 10117950-5010HLF | 1.0 | | 20.1 | 24 |
| 10117950-5015HLF | 1.5 | | 20.1 | 24 |
| 10117950-5020HLF | 2.0 | | 20.1 | 24 |
| 10117950-5025HLF | 2.5 | | 20.1 | 24 |
| 10117950-5030HLF | 3.0 | | 20.1 | 24 |
| 10117950-5035HLF | 3.5 | | 20.1 | 24 |
| 10117950-5040HLF | 4.0 | | 20.1 | 24 |
| 10117950-5045HLF | 4.5 | | 20.1 | 24 |
| 10117950-5050HLF | 5.0 | | 20.1 | 24 |
| 10117950-5055HLF | 5.5 | | 20.1 | 24 |
| 10117950-5060HLF | 6.0 | | 20.1 | 24 |
| 10117950-5065HLF | 6.5 | | 20.1 | 24 |
| 10117950-5070HLF | 7.0 | | 20.1 | 24 |
| 10117950-5075HLF | 7.5 | | 20.1 | 24 |
| 10117950-5080HLF | 8.0 | | 20.1 | 24 |
| 10117950-5090HLF ONLY USE EXT MSHD INTERFACE DON'T MEET SAS3.0 APPLICATION | 9.0 | | 20.1 | 24 |
| 10117950-5100HLF ONLY USE EXT MSHD INTERFACE DON'T MEET SAS3.0 APPLICATION | 10.0 | | 20.1 | 24 |

Amphenol FCI

© 2016 AFCI

| | | | | | |
|--------------|----------------|------------|--------------------------|-------------------------|-----------------------|
| dr | Deborah Ingram | 2011/11/16 | projection | size A3 | scale 1:1 |
| eng | Tom Feng | 2016/06/15 | | | |
| chr | - | - | product family C&A | ecn no ELX-N-24288-1 | rel level Released |
| appr | Michael Zhou | 2016/09/22 | | | |
| Amphenol FCI | | | FINAL ASSEMBLY (PASSIVE) | dwg no 10117950 | rev E |
| www.fci.com | | | cat. no. | Product - Customer Drw | sheet 3 of 4 |



| | |
|------------------|------------------|
| PRODUCT NUMBER | DESCRIPTION |
| 10117950-XXXXLF | NON-HF |
| 10117950-XXXXHLF | HALOGEN FREE (H) |

NOTES:

- MATERIAL:
 BACK SHELLS: ZINC ALLOY/ COPPER UNDERPLATE/ NICKEL OVERPLATE
 PULL TAB: THERMOPLASTIC POLYMER
 LATCH : STAINLESS STEEL
 FERRULE: BRASS
 EMI SKIRT: STAINLESS STEEL
 LOCTITE
 PADDLE CARD: PRINTED CIRCUIT SUBSTRATE
 HEAT SHRINK TUBE: POLYOLEFIN
- THIS PRODUCT MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) DIRECTIVE (2011/65/EU)


- THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
- UNLESS OTHERWISE SPECIFIED ASSEMBLED LENGTH TOLERANCE IS TO BE:
 "DIM L" < 1 METER = ±25mm
 "DIM L" 1 METER TO 4 METERS = ± 2% OF "DIM L"
 "DIM L" > 4 METERS = +0.00/-4% OF "DIM L"

5. LABEL DETAILS:

| | | |
|---|-------------------------------|----------------|
| △ | MANUFACTURER CODE OR NAME | COUNTRY ORIGIN |
| | FCI P/N | |
| | FCI CUSTOMER DRAWING REVISION | |
| | FCI SERIAL NUMBER | |
| | BAR CODE OF SERIAL NUMBER | |

FONT SHALL BE CLEARLY VISIBLE AND BLACK IN COLOR.

SERIAL NUMBER IS ONLY USED FOR TRACKING PRODUCT,DETAIL IS AS BELOW :

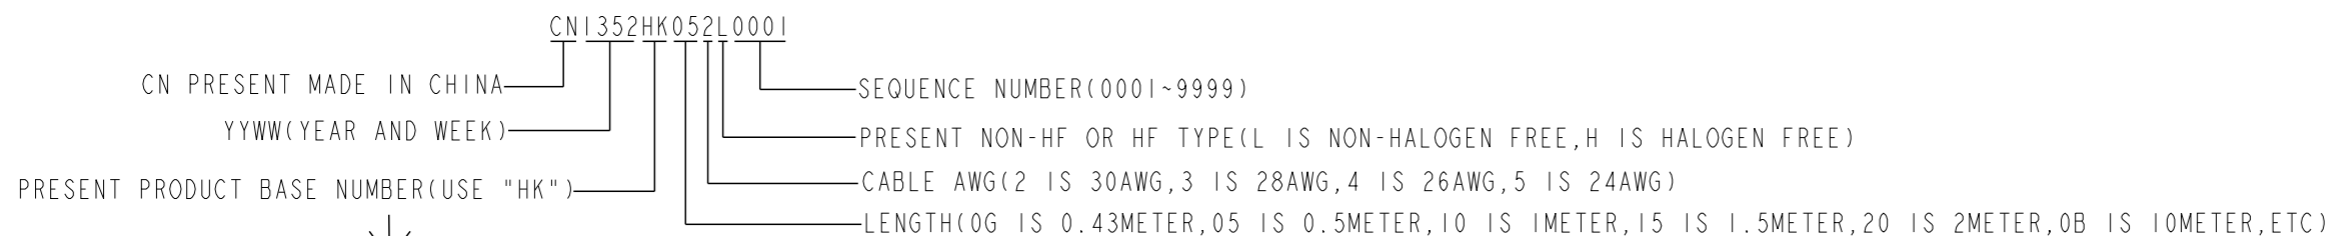

CABLE LABEL EXAMPLE:

| | |
|------------------|-------|
| FCI | CHINA |
| 10117950-2005LF | |
| REV.E | |
| CN1352HK052L0001 | |
| | |

- ALL CABLE ASSEMBLIES 100% TESTED FOR CONTINUITY AS DEFINED IN WIRING LIST.
- PLACE A CABLE TIE EVERY 0.5 METER ON ALL ASSEMBLIES, UNLESS OTHERWISE SPECIFIED. IN CASE OF 0.5 METER CABLE ASSEMBLY, CABLE TIE IS TO BE APPLIED AT THE MIDWAY POINT.
- OTHER TESTING PERFORMED AS REQUIRED BY PRODUCT SPECIFICATION: GS-12-651.
- PACKAGING OF LEAD FREE PRODUCTS MEETS LABELING AND PACKAGING PER SPECIFICATION GS-14-920. PACKAGE CABLE ASSEMBLIES PER GS-14-1272. DUST COVERS ARE TO BE ASSEMBLED PRIOR TO PACKAGING. FCI PACKAGE TRACKING BAG LABEL IS ONLY FOR REFERENCE.

NOTES CONTINUED:

- A "△" SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION. THE CURRENT REVISION WILL BE SHOWN IN THE SYMBOL.
- "H" PRODUCT NUMBERS DESIGNATE THE USE OF HALOGEN FREE RAW CABLE.
- HALOGEN FREE RAW CABLE CAN BE USED AS A SUBSTITUTE ON NON-HF PRODUCT NUMBERS.
- CABLE ASSEMBLY CAN MEET SAS 3.0 SPECIFICATION.
- MATES TO SERIES: 10112626 or 10112627 Or 10112628
- EEPROM INFORMATION REFER TO FCI LATEST PRODUCT SPEC. GS-12-651.
- CABLE IS OPTIONAL,WHICH HAD BEEN QUALIFIED BY FCI AND MEET FCI PRODUCT SPEC. GS-12-651.

| | | | | | | | | | |
|--------------|----------------|--------------------------|----------------|----------|------------------------|---------------|-------|--------------|---|
| dr | Deborah Ingram | 2011/11/16 | projection | mm ←→ | size | A3 | scale | 1:2 | |
| eng | Tom Feng | 2016/06/15 | | | ecn no | ELX-N-24288-1 | | | |
| chr | - | - | | | rel level | Released | | | |
| appr | Michael Zhou | 2016/09/22 | product family | C&A | | | | | |
| Amphenol FCI | | FINAL ASSEMBLY (PASSIVE) | | | dwg no | 10117950 | | rev | E |
| www.fci.com | | cat. no. | - | | Product - Customer Drw | | | sheet 4 of 4 | |

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9