



Series 80 Mighty Mouse Contacts and Tools

Contact Insertion and Removal Tools and Contact Retention Tester 809-107

A

Contact insertion and removal tools

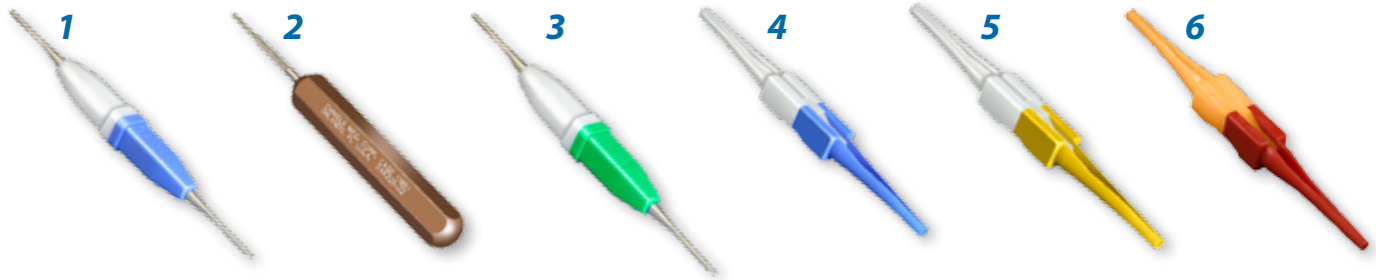


Figure	Size	Type	Part Number	Military Part Number	Daniels Part Number
1	#23	Insertion/Extraction	809-088	(None)	(None)
2	#23	Insertion Only	809-013	(None)	DAK225-22
3	#20HD	Insertion/Extraction	809-203 (Append D for Delrin tip)	(None)	(None)
4	#16	Insertion/Extraction	809-131	M81969/14-03	(None)
5	#12	Insertion/extraction	809-132	M81969/14-04	(None)
6	#20	Insertion/extraction	809-207	M81969/14-10	(None)

1 Insertion/Extraction Tool for #23 Contacts. Features molded plastic grips and sturdy stainless steel tips. Blue/White molded handle.

3 Insertion/Extraction Tool for #20HD Contacts. This tool features molded plastic grips and sturdy stainless steel or Delrin tips. Molded handle in Green/White for SS or Green/Blue for Delrin tips.

5 Insertion/Extraction Tool for #12 Contacts. Use with size #12 coaxial or power contacts. Molded plastic. White extraction tip, yellow insertion tip.

2 Insertion Tool for #23 Contacts. This tool features anodized aluminum handle and stainless steel insertion tip.

4 Insertion/Extraction Tool for #16 Contacts. Use with size #16 coaxial or power contacts. Economical molded plastic. White extraction tip, blue insertion tip.

6 Insertion/Extraction Tool for #20 Contacts. Molded plastic. Orange extraction tip, red insertion tip.

Contact retention testers for size #23, #20, #16, #12 contacts (Kit or Individual Parts)



Check for properly seated contacts with this spring-loaded tester. Apply the tool tip to the mating end of a contact. Push on the handle until the spring compresses to the recommended force. A visual indicator shows full compression. The contact is properly retained if it is not displaced.

Adjust handle to appropriate settings:

Contact	P/N	Setting
#23	809-107-1	3.2 pounds
#20 & 20HD	809-370-1	8 pounds
#16	809-371-1	13 pounds
#12	809-372-1	13 pounds

Contact Size	Handle	Pin Tip	Socket Tip	Complete Kit
#23	809-107-1 (HT250-2)	809-107-2 (68-023-01)	809-107-3 (67-023-01)	809-107-4
#20 & 20HD	809-370-1 (HT250-4)	890-370-2 (68-020-01)	809-370-3 (67-020-01)	809-370-4
#16	809-371-1 (HT250-4)	809-371-2 (68-016-01)	809-371-3 (67-016-01)	809-371-4
#12	809-372-1 (HT250-4)	809-372-2 (68-012-01)	809-372-3 (67-012-01)	809-372-4

Daniels part numbers provided in parenthesis

Dimensions in Inches (millimeters) are subject to change without notice.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9