


Fast-Acting $1\frac{3}{32}$ " x $1\frac{1}{2}$ " (10x38mm) Midget Fuses, 600Vac/dc, $\frac{1}{10}$ –30A KLM Series



Dimensions - in (mm)

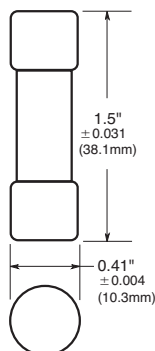

Catalog Symbol: KLM

Fast-Acting $\frac{1}{10}$ –30AUL Listed: STD. 248-14, (FILE #E19180,
GUIDE #JDYX)CSA Certified, C22.2 NO. 248. 14 (CLASS #1422-01,
FILE #53787)Interrupting Ratings: 100kA at 600Vac
50kA at 600Vdc**Electrical Ratings (Catalog Symbol and Amps) IR 100kA AC**

KLM- $\frac{1}{10}$	KLM- $\frac{1}{8}$	KLM-2	KLM-6	KLM-12
KLM- $\frac{1}{4}$	KLM- $\frac{3}{8}$	KLM-2- $\frac{1}{2}$	KLM-7	KLM-15
KLM- $\frac{1}{2}$	KLM-1	KLM-3	KLM-8	KLM-20
KLM- $\frac{3}{4}$	KLM-1- $\frac{1}{4}$	KLM-4	KLM-9	KLM-25
KLM- $\frac{1}{10}$	KLM-1- $\frac{1}{2}$	KLM-5	KLM-10	KLM-30

Designed To:**Fuses:**KLM $\frac{1}{10}$ thru 30**Designed to:**


Carry 110% of rating for 4 hours
AC Opens at 135% of rating within 1 hour
AC Maximum Interrupting Rating of 100kA at 600Vac
DC Maximum Interrupting Rating of 50kA at 600Vdc
DC Minimum Interrupting Rating of 200% rated current at 600Vdc.

Carton Quantity and Weight

Amp Ratings	Carton Qty.	Weight	
		Lbs.	Kg.
0-30	10	0.187	0.088

- A full range DC midget fuse.
- Melamine tube.
- Nickel-plated brass endcaps.

Time-Current Characteristic Curves—Total Clearing

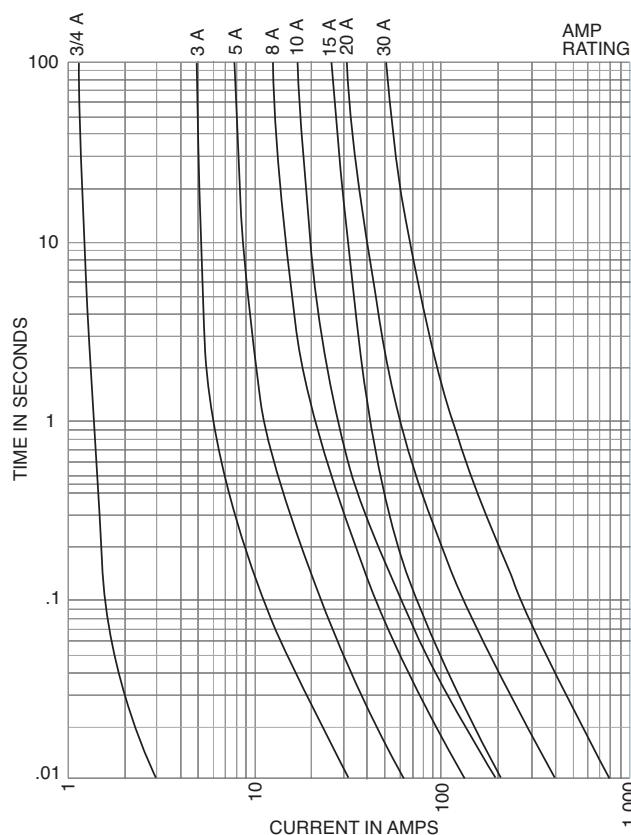**Recommended fuse blocks/fuse holders
See Data Sheets listed below**

- Open fuse blocks - 1104, 2104
- Finger-safe fuse holders - 1109, 1102, 1103, 2053
- Panel-mount fuse holders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuse holders - 2127, 2126

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9