


T-1 StatusPak™ Circuit Board Indicators

Description and Features

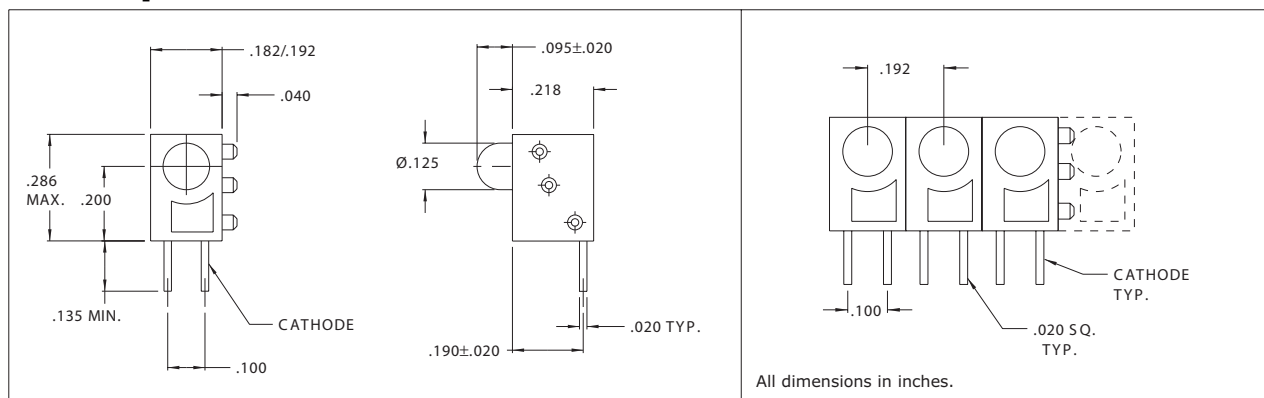

Printed Circuit Board assembly has been made faster and easier than ever before. Now you can mount from one to ten circuit board indicators, as a single unit, in one easy step.

T-1 StatusPak™ is customized to your specification. You choose the number of LEDs, color sequence and position.

StatusPak™ is shipped to you as a complete unit, ready for one-step PC board mounting. Unique snap-together feature allows you to add or take away StatusPak™ modules as needed without any special tooling.

•RoHS Compliant

Refer to Mounting Hole Pattern 1.pdf

ELECTRO - OPTICAL CHARACTERISTICS AND RATINGS

Part Number	Emitted Color	Lens Color	Package Type	Luminous Intensity		Forward Voltage		Viewing Angle (degrees)	Peak Wavelength (nm)
				Min. (mcd)	Typ. (mcd)	Typ. (V)	Max. (V)		
CMC01R	H.E.Red	Clear	Non-Diffused	24.0	60.0	2.0	2.5	30	625
CMC01Y	Yellow	Clear	Non-Diffused	24.0	60.0	2.1	2.5	30	590
CMC01G	H.E.Green	Clear	Non-Diffused	24.0	60.0	2.2	2.5	30	565
CMW01R	H.E.Red	Red	Diffused	3.2	20.0	2.0	2.5	130	625
CMW01Y	Yellow	Yellow	Diffused	3.2	12.5	2.1	2.5	120	590
CMW01G	H.E.Green	Green	Diffused	3.2	12.5	2.2	2.5	120	565

T-1 StatusPak™ Circuit Board Indicators

Description and Features

How to order a Multi Position Assembly

1. Determine the lens type you require:
 -diffused or non-diffused
2. Determine the number of positions you require
 including any open spaces. (CML does not recommend assemblies of greater than ten positions.)
3. Determine the specific LED required in each position from the table below.

CMC (Non-Diffused)	CMW (Diffused)
R = Ultra Brite Red	R = Hi-Brite Red
Y = Ultra Brite Yellow	Y = Hi-Brite Yellow
G = Ultra Brite Green	G = Hi-Brite Green
X = Open Space	X = Open Space

Example:

C M W - 0 5 - R Y G G R

| | | |
 Lens Type # of Positions LED Sequence

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9