

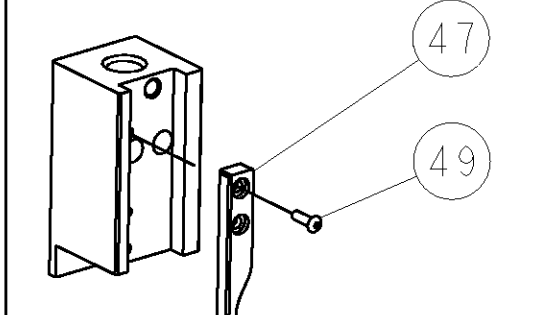
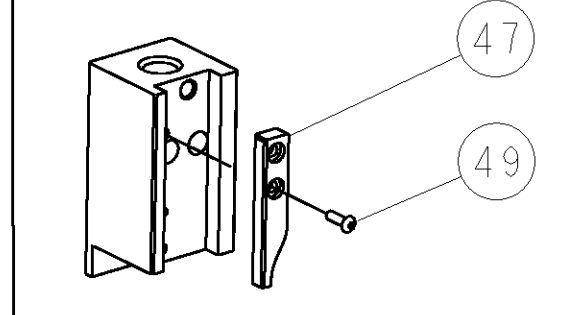
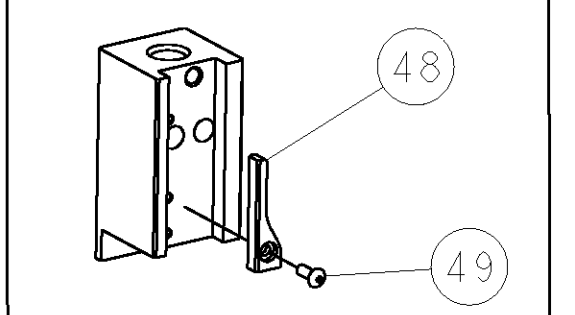
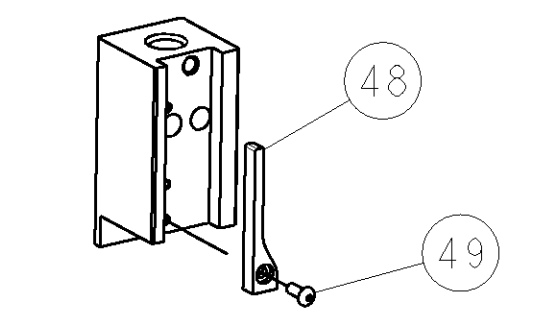


8		7		20	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION			
© COPYRIGHT 20		BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.			
PART NUMBER	REV	TERMINATOR	FEED TYPE	DESCRIPTION	
1426635-1	A	LEADMAKER	MECH POST FEED	CUTS CARRIER	
1426635-2	A	BENCH	MECH PRE FEED	CUTS CARRIER	
1426635-6	A	LEADMAKER	MECH POST FEED	CONTINUOUS CARRIER	
7-1426635-1	A	LEADMAKER	MECH POST FEED	-1 AND SPARE PARTS	
7-1426635-2	A	BENCH	MECH PRE FEED	-2 AND SPARE PARTS	
7-1426635-6	A	LEADMAKER	MECH POST FEED	-6 AND SPARE PARTS	
7-1426635-7	A	-	-	SPARE PARTS KIT	


CRIMP DATA				CENVALSA TERMINAL		TYCO CRIMP SPECS	
TERMINAL NAME: SERIES 2044 CONTACT							
CRIMP	SIZE		TYPE		RANGE		
WIRE	1.22 [1.048 IN]		F		28-22 AWG		
INSUL	1.57 [1.062 IN]		F		0.89-1.30 [1.035-.051 IN]		
WIRE STRIP LENGTH 2.50-3.30 [1.098-.134 IN]					APPL INSTRUCTIONS 408-8322		
TERMINAL APPL SPEC			-				FEED 5.00 [1.197 IN]
TERMINALS APPLIED							
TYCO TERM PN		MANUF TERM PN		TYCO TERM PN		MANUF TERM PN	
1949326-1		2044-2000		1949326-5		2044-6000	
1949326-2		2044-3000		1949326-6		2044-7000	
1949326-3		2044-4000		-		-	
1949326-4		2044-5000		-		-	
WIRE SIZE			CRIMP HEIGHT			PIN PN & LENGTH [IN]	
0.50mm ²			0.89 ±0.05 [1.035 ±.002 IN]			354779-6 [1.3020]	
22 AWG			0.84 ±0.05 [1.033 ±.002 IN]			1-354779-2 [1.3050]	
24 AWG			0.76 ±0.05 [1.030 ±.002 IN]			1-354779-9 [1.3085]	
26 AWG			0.71 ±0.05 [1.028 ±.002 IN]			2-354779-3 [1.3105]	
28 AWG			0.69 ±0.05 [1.027 ±.002 IN]			2-354779-5 [1.3115]	
-			-				
-			-				
-			-				
-			-				
-			-				
-			-				
-			-				

- △ RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
- △ CERTAIN TERMINALS REQUIRE LUBRICATION. REFER TO THE APPLICATOR INSTRUCTION SHEET FOR MORE INFORMATION.
4. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- △ ALL CRIMP DATA CALCULATED BY TYCO ELECTRONICS UK LTD.
- △ WIRE RANGE SHOWN IS THAT OF THE TERMINAL.
- △ INSULATION RANGE SHOWN IS THAT OF THE APPLICATOR.
- △ WIRE SIZE IS SPECIFIC TO ORIGINAL CUSTOMER.

VIEW B ROTATED 180°			
POST-FEED 40mm STROKE	POST-FEED 30mm STROKE	PRE-FEED 30mm STROKE	PRE-FEED 40mm STROKE
			

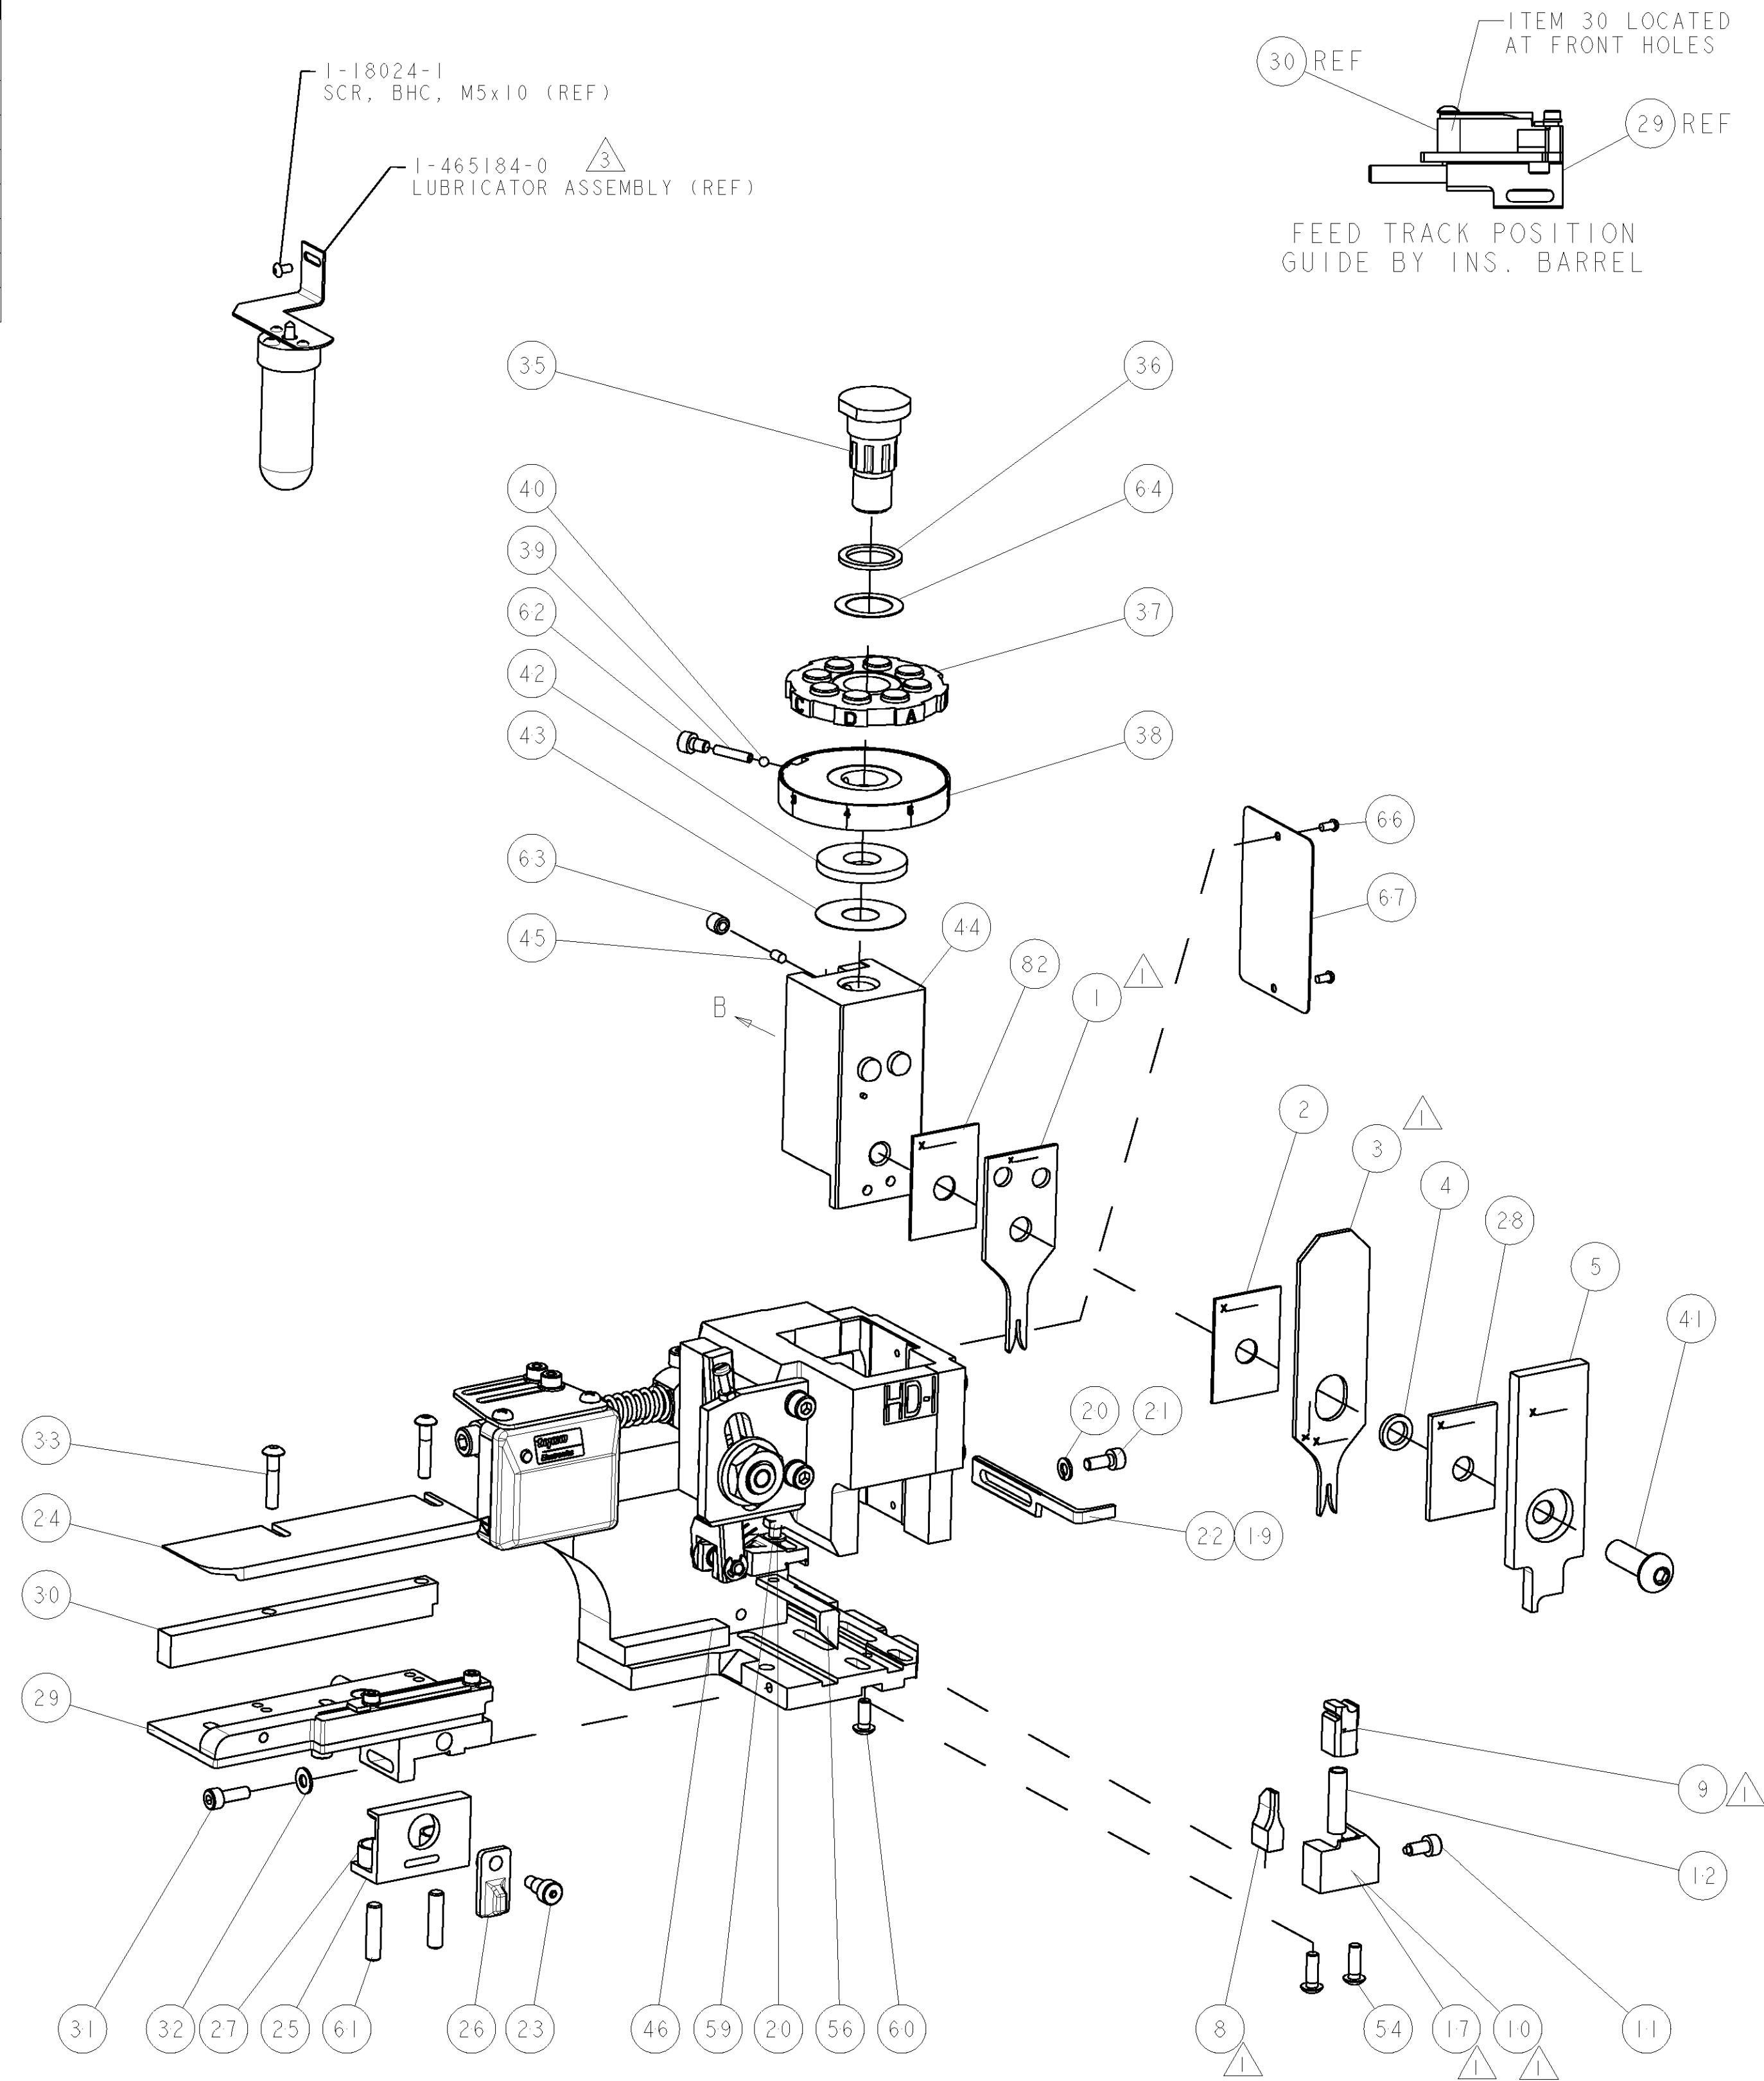

-	-	-	-	-	-	-	-	-	84
-	-	-	-	-	-	-	-	-	83
-	1	1	1	1	1	1	455888-8	SPACER, CRIMPER	82
-	-	-	-	-	-	-	-	-	81
-	-	-	-	-	-	-	-	-	80
-	-	-	-	-	-	-	-	-	79
-	-	-	-	-	-	-	-	-	78
-	-	-	-	-	-	-	-	-	77
-	-	-	-	-	-	-	-	-	76
-	-	-	-	-	-	-	-	-	75
-	-	-	-	-	-	-	-	-	74
-77	-76	-72	-71	-6	-2	-1	PART NO	DESCRIPTION	ITEM NO

SET UP GAGE 458637-3		LOC	DIST	REVISIONS											
		A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD						
				A		SEE ECO-07-010806	08MAY2007	DP	MC						
-	-	-	-	-	-	-	-	-	73						
-	-	-	-	-	-	-	-	-	72						
-	1	1	1	1	1	1	1338705-1	DOCUMENTATION PACKAGE	71						
-	-	-	-	-	-	-	-	-	70						
-	-	-	-	-	-	-	-	-	69						
-	-	-	-	-	-	-	-	-	68						
-	1	1	1	1	1	1	461264-1	PLATE, IDENTIFICATION	67						
-	2	2	2	2	2	2	21017-2	SCREW, DRIVE	66						
-	-	-	-	-	-	-	-	-	65						
-	1	1	1	1	1	1	986950-1	WASHER, FLAT PRECISION	64						
-	1	1	1	1	1	1	3-18031-0	SCR, SET, CUP POINT M6 X 6.0	63						
-	1	1	1	1	1	1	18023-9	SCR, SKT HD CAP M4 X 6.0	62						
-	2	2	2	2	2	2	2-18032-5	SCR, SET, FLT POINT M5 X 20.0	61						
-	1	1	1	1	1	1	18024-7	SCR, BTN SKT HD CAP (M4 X 10.0)	60						
-	1	1	1	1	1	1	5-18022-2	SCR, HEX HD CAP M4 X 8.0	59						
-	-	-	-	-	-	-	-	-	58						
-	-	-	-	-	-	-	-	-	57						
-	1	1	1	1	1	1	1338685-1	PAWL, FEED	56						
-	-	-	-	-	-	-	-	-	55						
-	2	2	2	2	2	2	18024-8	SCR, BTN SKT HD CAP (M4 X 12.0)	54						
-	-	-	-	-	-	-	-	-	53						
-	-	-	-	-	-	-	-	-	52						
-	-	-	-	-	-	-	-	-	51						
-	-	-	-	-	-	-	-	-	50						
-	1	1	1	1	1	1	18024-3	SCR, BTN SKT HD CAP (M3 X 10.0)	49						
-	-	1	-	-	1	-	1338675-1	CAM, UNIVERSAL PRE FEED	48						
-	1	-	1	1	-	1	1338676-1	CAM, UNIVERSAL POST-FEED	47						
-	1	1	1	1	1	1	1320999-3	APPLICATOR SUBASSEMBLY, HDI	46						
-	1	1	1	1	1	1	690191-1	PLUG,NYLON	45						
-	1	1	1	1	1	1	1338660-1	RAM	44						
-	1	1	1	1	1	1	690125-1	SHIM SUB-ASSY	43						
-	1	1	1	1	1	1	690124-4	WASHER, RAM (.135)	42						
-	1	1	1	1	1	1	2-18024-6	SCR, BTN SKT HD CAP (M8 X 25.0)	41						
-	1	1	1	1	1	1	23241-1	BALL, STEEL	40						
-	1	1	1	1	1	1	2-22278-7	SPRING, COMPRESSION	39						
-	1	1	1	1	1	1	1320922-4	DISC, ADJUST, INSULATION CRIMP	38						
-	1	1	1	1	1	1	354777-1	WIRE DISC, ASSEMBLY	37						
-	1	1	1	1	1	1	22480-5	SPRING, COMPRESSION	36						
-	1	1	1	1	1	1	690212-1	POST, RAM	35						
-	-	-	-	-	-	-	-	-	34						
-	2	2	2	2	2	2	1-18024-0	SCR, BTN SKT HD CAP (M4 X 20.0)	33						
-	1	1	1	1	1	1	18027-2	WASHER, FLAT, REG M4	32						
-	1	1	1	1	1	1	1-18023-2	SCR, SKT HD CAP M4 X 12.0	31						
-	1	1	1	1	1	1	1-1320908-7	SPACER, STRIP GUIDE	30						
-	1	1	1	1	1	1	1633073-1	STRIP GUIDE ASSEMBLY	29						
-	1	1	1	1	1	1	2-455888-0	SPACER, CRIMPER	28						
-	2	2	2	2	2	2	1-22284-0	SPRING, COMPRESSION	27						
-	1	1	1	1	1	1	356835-1	LEVER, DRAG RELEASE	26						
-	1	1	1	1	1	1	240792-1	DRAG, TERMINAL	25						
-	1	1	1	1	1	1	1320928-1	PLATE, STRIP GUIDE	24						
-	1	1	1	1	1	1	980371-4	SCR, SKT HD SHLDR 5.0 DIA X 6.0	23						
-	-	-	1	1	-	1	690472-2	STRIPPER	22						
-	1	1	1	1	1	1	1-18023-1	SCR, SKT HD CAP M4 X 10.0	21						
-	2	2	2	2	2	2	18025-2	WASHER, SPRG LOCK, REG M4	20						
-	-	1	-	-	1	-	690472-1	STRIPPER	19						
-	-	-	-	-	-	-	-	-	18						
-	1	-	-	1	-	-	1338684-1	SHEAR HOLDER, FRONT	17						
-	-	-	-	-	-	-	-	-	16						
-	-	-	-	-	-	-	-	-	15						
-	-	-	-	-	-	-	-	-	14						
-	-	-	-	-	-	-	-	-	13						
-	1	1	1	1	1	1	3-22280-3	SPRING, COMPRESSION	12						
-	1	1	1	1	1	1	356885-4	STOP, SHEAR	11						
-	-	1	1	-	1	1	1320921-1	SHEAR HOLDER, FRONT, CUT	10						
-	1	1	1	1	1	1	462006-1	FLOATING SHEAR, FRONT	9						
1	2	2	2	1	1	1	3-1633139-7	ANVIL, COMBINATION	8						
-	-	-	-	-	-	-	-	-	7						
-	-	-	-	-	-	-	-	-	6						
-	1	1	1	1	1	1	2-455889-0	DEPRESSOR, SHEAR	5						
-	1	1	1	1	1	1	238011-7	BLOCK, CRIMPER SPACER	4						
1	2	2	2	1	1	1	5-683453-9	CRIMPER, INSULATION PREMIUM	3						
-	1	1	1	1	1	1	455888-8	SPACER, CRIMPER	2						
1	2	2	2	1	1	1	9-568176-9	CRIMPER, WIRE	1						
-77	-76	-72	-71	-6	-2	-1	PART NO	DESCRIPTION	ITEM NO						
THIS DRAWING IS TO REMAIN THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED FOR THE PURPOSES SPECIFIED IN THE ORDER. IT IS TO BE RETURNED TO TYCO ELECTRONICS CORPORATION IF IT IS NOT USED FOR THE PURPOSES SPECIFIED IN THE ORDER. IT IS TO BE DESTROYED IF IT IS NOT USED FOR THE PURPOSES SPECIFIED IN THE ORDER.							DWN	LOTHOUSE	20MAR2007	tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608					
DIMENSIONS: mm [IN]							CHK				NAME				
TOLERANCES UNLESS OTHERWISE SPECIFIED:							APVD	M. CLIFFORD	20MAR2007		PRODUCT SPEC				
											APPLICATION SPEC				
										See Table	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL											WEIGHT				
FINISH															
CUSTOMER DRAWING															
												</			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9