

Instructions for installation and use of Scotchflex® Delta Hand Tool Kit 3710.

General:

The 3710 Delta Hand Tool Kit is designed for assembly of all Scotchflex Delta Connectors in Pin and Socket versions. This handy portable tool is specially suited for prototype and field-repair applications. The Hand Tool Kit 3710 consists of Pistol Grip 3586-12, Assembly Head 3714 and Assembly Head Inserts 3722, 3724 and 3727. (fig. 1)

Table 1

Assembly Head Insert Part No.	For Assembly of Connector Type
3722	Delta Pin version 9 and 15 contacts
3724	Delta Pin version 25 and 37 contacts
3727	Delta Socket version All Pin Counts

Set up:

Cut suitable cable length using Scotchflex Cable Shear 3320, 3437A or Scotchflex Cable Cutter-3382. (fig. 2)

Note: To prevent shorting of conductors, do not use scissors type device or knife to cut or trim the cable.

2. Mount Assembly Head 3714 on the Pistol Grip 3586-12. The assembly head snaps into position. (fig. 3)

3. Select appropriate assembly head insert for the connector version to be assembled. (table 1)

4. Fix assembly head insert on the assembly head with two mounting screws provided with the tool. Adjust positioning pins on assembly head to match the connector mounting holes. (fig 4)

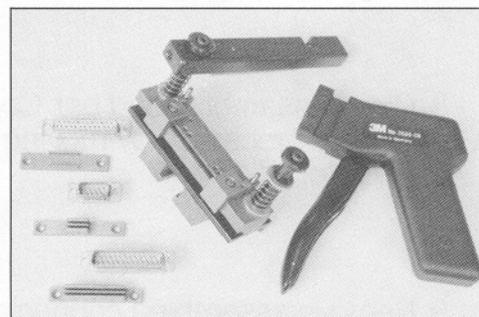


Fig. 1

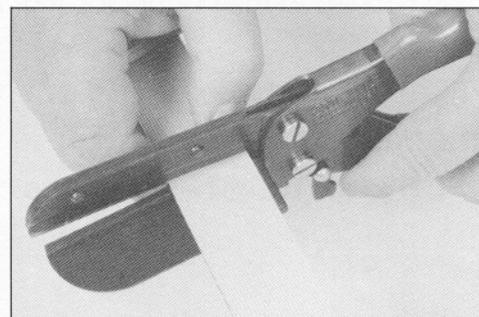


Fig. 2

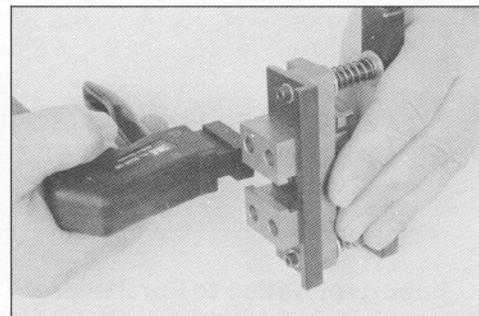


Fig. 3

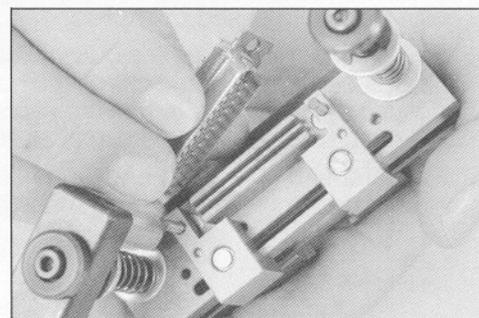


Fig. 4

5. Rub paper liner on connector cover for maximum adhesive transfer. Remove paper liner from the cover.

6. Use finger pressure to seat cable in the cover grooves. Check visually to ensure that cable is properly aligned and oriented with cover grooves.

7. Engage latch guides of the connector body to the cover subassembly. Use finger pressure to latch it in pre-assembly position. Open assembly head bar. Place connector cable assembly in the assembly head engaging the positioning pins. (fig. 5)

8. Close assembly head bar. Complete the assembly procedure by moving the pistol actuator to end stop. (fig. 6)

9. Remove assembled connector from the assembly head and visually inspect to ensure that the cover is latched to the connector. (fig. 7)

Strain Relief Attachment:

1. Fold the cable back over the connector cover.

2. Engage one end of the strain relief on one end of the connector.

3. Snap other end of the strain relief into position on the opposite connector end. (fig. 8)

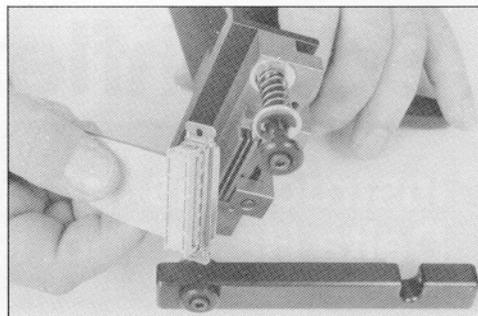


Fig. 5

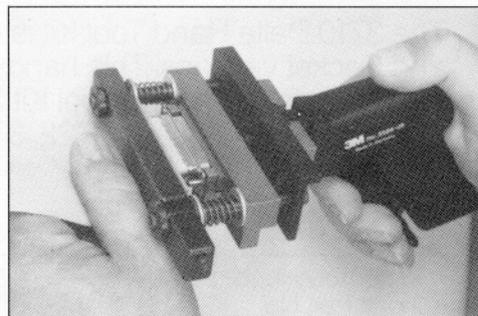


Fig. 6

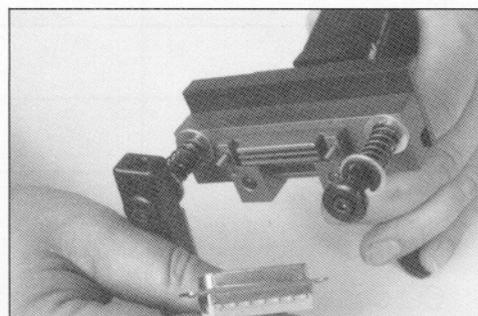


Fig. 7

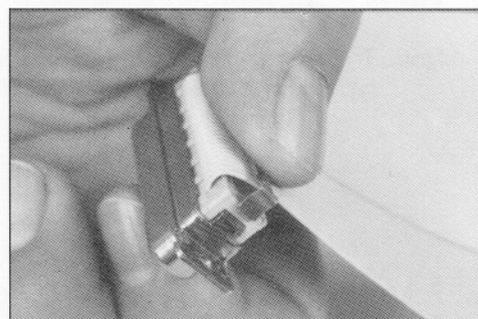


Fig. 8

Important Notice to Purchaser:

All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed, and the following is made in lieu of all warranties expressed or implied:

Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use or the inability to use the product. Before using, user shall determine the suitability of the product for his intended use, and user assumes all risk and liability whatsoever in connection therewith.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of seller and manufacturer.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9