

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	ECR-14-001878	10FEB2014	GK	HMR

REPLACED BY OCEAN STYLE APPLICATOR PART
NUMBER 2151128-1


FOR REPLACEMENT PARTS FOR APPLICATOR 1855114
REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED)
WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE
SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR
1855114

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	GOPALAKRISHNA HV			
		CHK	RAGHAVENDRA			
		APVD	RAGHAVENDRA			
		PRODUCT SPEC				
		APPLICATION SPEC				
		WEIGHT				
		CUSTOMER DRAWING		SCALE	SHEET 1 OF 2	
				REV	A1	


TE Connectivity	
SIDE FEED HDM APPLICATOR FINE ADJUST	
SIZE	CAGE CODE
DRAWING NO	RESTRICTED TO
A3	©- 1855114

TE Connectivity	
SIDE FEED HDM APPLICATOR FINE ADJUST	
SIZE	CAGE CODE
DRAWING NO	RESTRICTED TO
A3	©- 1855114

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±
	1 PLC ±
	2 PLC ±
	3 PLC ±
	4 PLC ±
MATERIAL	FINISH





PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION
1855114-1	A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER	
1855114-2	A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER	
1855114-3	A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER	
1855114-6	A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER	
7-1855114-7	A	-	-	-	-	SPARE PARTS

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

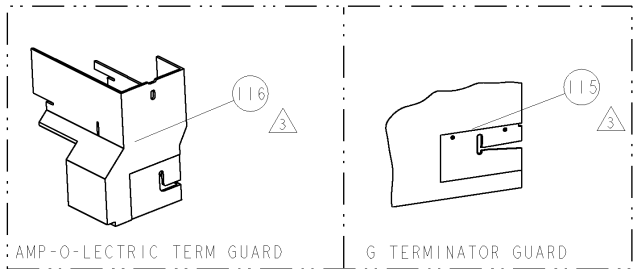

TERMINAL NAME: TAB, FASTON, .250 SERIES					
42474	-	-	AMP TERMINAL - AMP CRIMP SPECS		
-	-	-	REF SETTING	CRIMP HEIGHT	WIRE SIZE
-	-	-	B5	.070±.002[1.78±0.05mm]	14 AWG
-	-	-	D4	.061±.002[1.55±0.05mm]	16 AWG
-	-	-	E4	.055±.002[1.40±0.05mm]	18 AWG
-	-	-	-	-	-
-	-	-	CRIMP	SIZE	TYPE
-	-	-	WIRE	.110 [2.79mm]	F 14-18 AWG
-	-	-	INSUL	.180 [4.57mm]	F Ø.110-.150
WIRE STRIP LENGTH .192-.222	TERM APPL SPEC 114-2036	FEED .540	APPL INSTRUCTIONS 408-8040	SET UP GAGE 458637-1	

LOC		DIST		REVISIONS			
A	66	P	LTR	DESCRIPTION	DATE	OWN	APPD
		A		RELEASED	01A022006	LG	GB

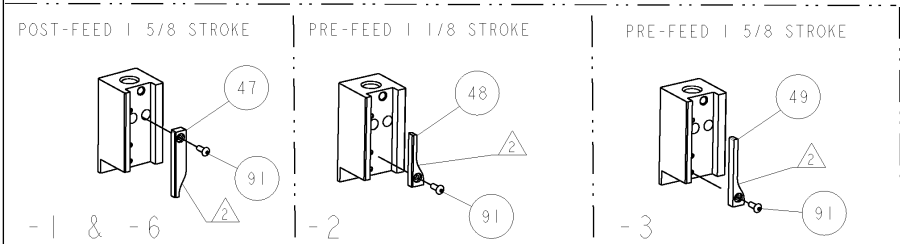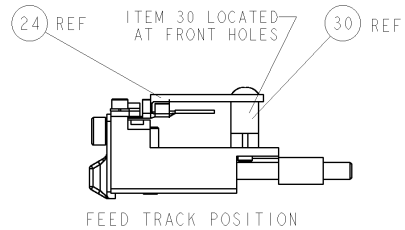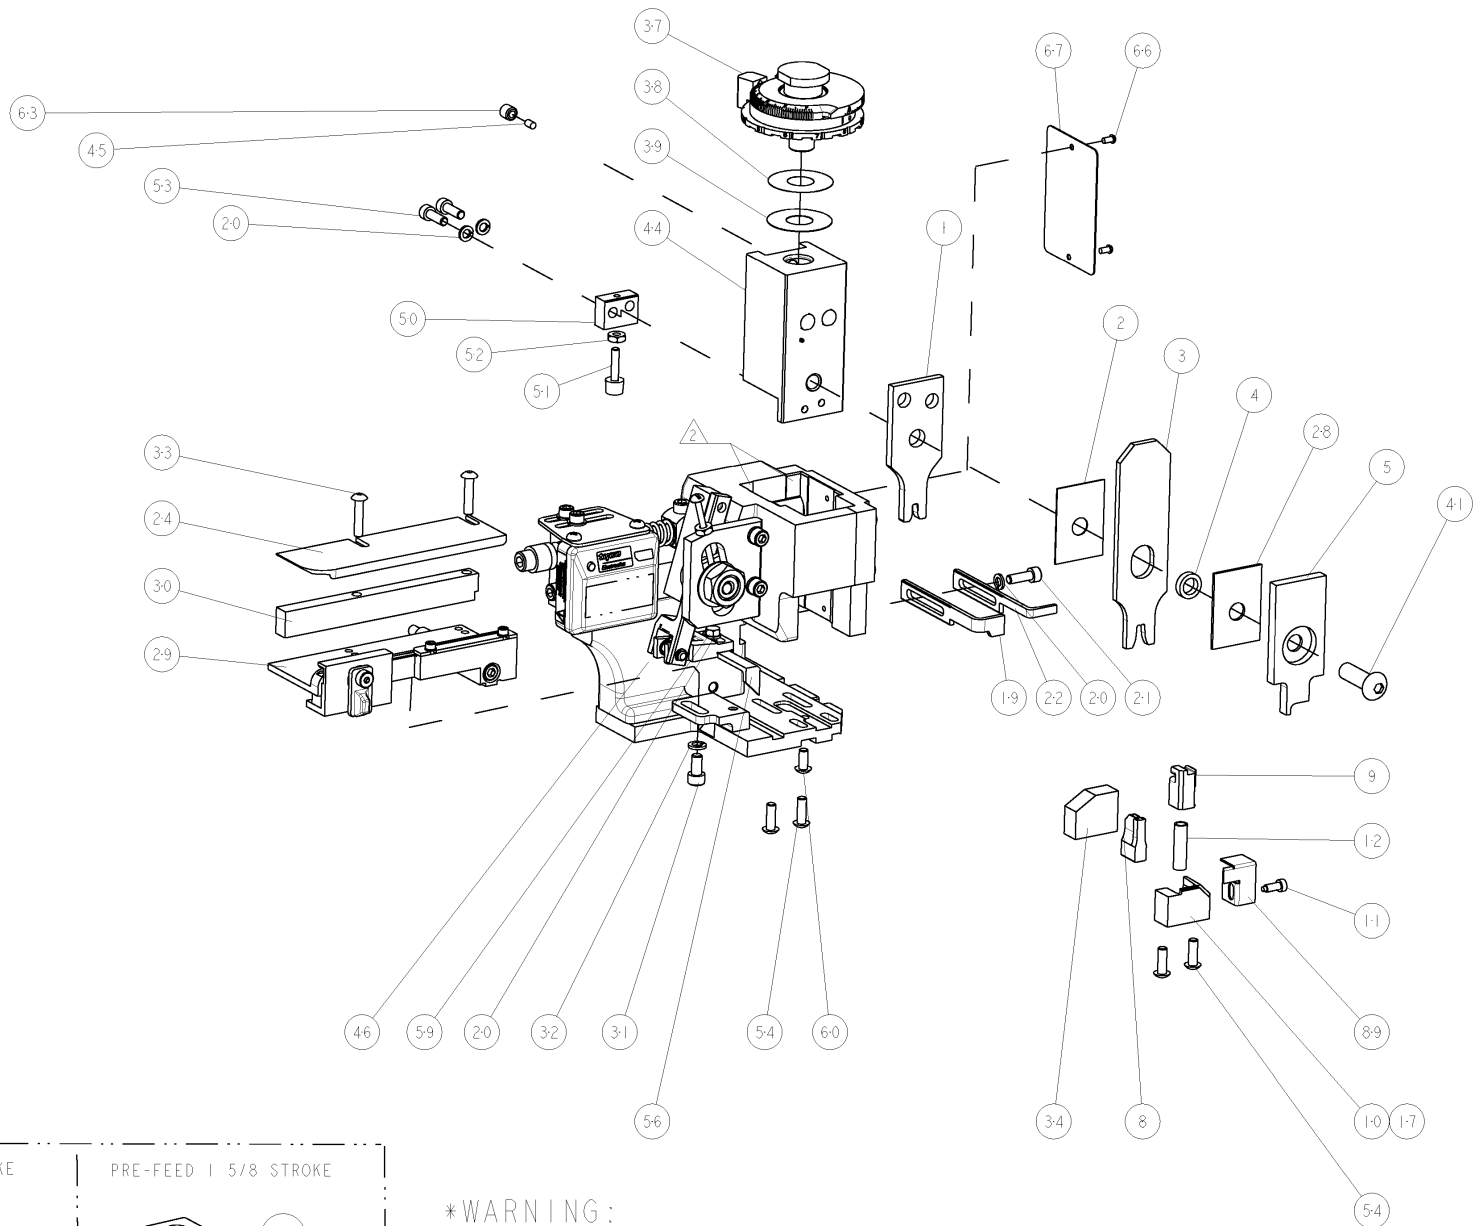

***WARNING:**
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

△	-	-	REF	-	..	455749-1	GUARD WINDOW	116
△	-	-	REF	-	..	679532-1	INSERT, GUARD	115
	-	1	1	1	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
	-	1	1	1	-	318563-1	GUARD, FRONT CHIP	89
	-	1	1	1	-	4088040	SF APPL INST 408-8040	72
	-	1	1	1	-	217238-1	GENERAL INSTRUCTION PKG	71
	-	1	1	1	-	461264-5	PLATE, IDENTIFICATION	67
	-	2	2	2	-	21017-2	SCREW, DRIVE	66
	-	1	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
	-	1	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
	-	1	1	1	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
	-	1	1	1	-	458537-2	PAWL, FEED	56
	-	4	4	4	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
	-	2	2	2	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	53
	-	1	1	1	-	21018-5	NUT, HEX, REG 6-32	52
	-	1	1	1	-	811242-2	BUMPER, HOLD DOWN	51
	-	1	1	1	-	690753-1	SPACER, TONKER	50
	-	-	1	-	..	690602-6	CAM, PRE FEED, 1 5/8	49
	-	-	1	-	..	690602-5	CAM, PRE FEED, 1 1/8	48
	-	1	-	-	1	690501-4	CAM, POST FEED, 1 5/8	47
	-	1	1	1	-	459456-1	APPL. BASIC SUB ASSY (SIDE WISE MOCA)	46
	-	1	1	1	-	690191-1	PLUG, NYLON	45
	-	1	1	1	-	455673-1	RAM, SIDE FEED	44
	-	1	1	1	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
	-	1	1	1	-	690125-1	SHIM SUB-ASSY	39
	-	1	1	1	-	469367-2	SHIM	38
	-	1	1	1	-	879103-2	FINE ADJUST HEAD SUBASSY	37
	-	1	1	1	-	4-690786-9	TERMINAL SUPPORT	34
	-	2	2	2	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	33
	-	1	1	1	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
	-	1	1	1	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
	-	1	1	1	-	1320908-8	SPACER, STRIP GUIDE	30
	-	1	1	1	-	1633091-1	ASSEMBLY, STRIP GUIDE	29
	-	1	1	1	-	1-455888-0	SPACER, CRIMPER	28
	-	1	1	1	-	1320928-1	PLATE, STRIP GUIDE	24
	-	1	-	-	1	690472-2	STRIPPER	22
	-	1	1	1	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
	-	4	4	4	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
	-	-	1	1	-	691353-1	STRIPPER	19
△	-	1	-	-	-	679625-1	SHEAR HOLDER, FRONT (NO CUT)	17
△	-	1	1	1	-	3-22280-3	SPRING, COMPRESSION	12
△	-	1	1	1	-	690461-1	STOP, SHEAR	11
△	-	-	1	1	-	690459-1	SHEAR HOLDER, FRONT	10
△	-	1	1	1	-	454276-1	FLOATING SHEAR, FRONT	9
△	1	1	1	1	-	690735-1	ANVIL, COMBINATION	8
△	-	1	1	1	-	3-455889-6	DEPRESSOR, SHEAR	5
△	-	1	1	1	-	238011-2	BLOCK, CRIMPER SPACER	4
△	1	1	1	1	-	6-456134-1	CRIMPER, INSULATION F PREMIUM	3
△	-	1	1	1	-	455888-4	SPACER, CRIMPER	2
△	1	1	1	1	-	3-456408-3	CRIMPER, WIRE PREMIUM	1

-77 -6 -3 -2 -1 U/M		PART NO	DESCRIPTION		ITEM NO
DIMENSIONS: INCHES		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.01 4 PLC ±.001 ANGLES .01	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
MATERIAL		FINISH	WEIGHT		
CUSTOMER DRAWING		SCALE 3:5	SHEET 1 OF 1		REV A

CUSTOMER VIEWABLE ASSEMBLY

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9