

E-Series RF 1:4 Transmission Line Step-up Transformer 500 — 3000 MHz


Rev. V6

Features


- Surface mount
- Wide frequency range
- 1:4 Impedance Ratio
- CT on Secondary
- Pb Free
- RoHS* version of ETC1.6-4-2-3
- 260°C reflow compatible.

Description


M/A-COM Technology Solutions MABA-007236-C16423 is a RoHS compliant 1:4 RF transmission line step-up transformer in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching. Parts are packaged in tape & reel.

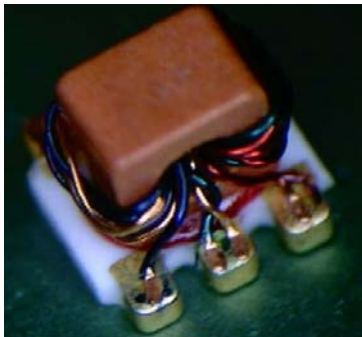

Schematic

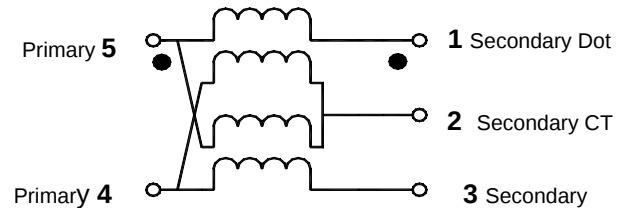

Case Style

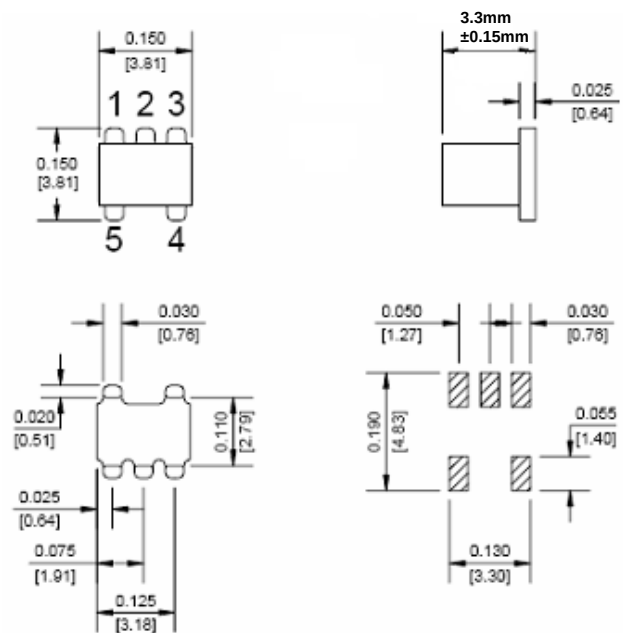

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010, unless otherwise stated

Pin Configuration

Pin No.	Function
1	Secondary Dot
2	Secondary CT
3	Secondary
4	Primary
5	Primary Dot

Recommended Maximum Ratings ^{1,2}

Parameter	Value
DC Power	250 mW
DC Current	50 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM Technology Solutions does not recommend sustained operation near these survivability limits.


E-Series RF 1:4 Transmission Line Step-up Transformer 500 — 3000 MHz

Rev. V6


Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	500 - 3000	MHz	—	—	—
Insertion Loss	$F_L - f_U$	500 - 700	dB	—	—	2.0
		700 - 1200	dB	—	—	1.0
		1200 - 3000	dB	—	—	3.0


Insertion Loss

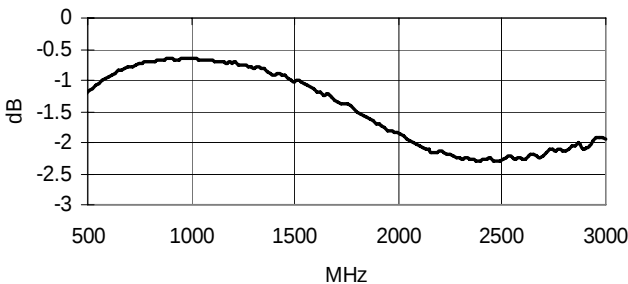


Phase Unbalance

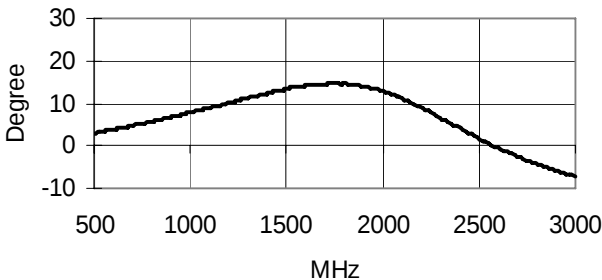

Input Return Loss

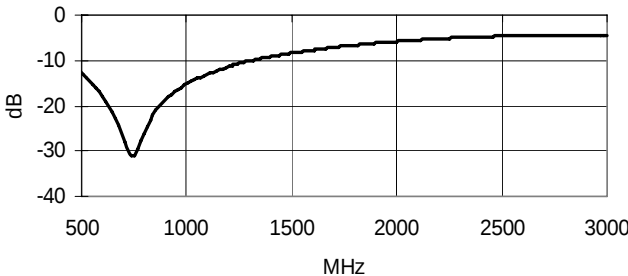


Amplitude Unbalance

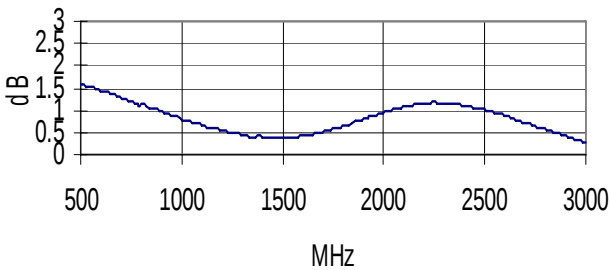

E-Series RF 1:4 Transmission Line Step-up Transformer 500 — 3000 MHz

Rev. V6

Tape & Reel Information

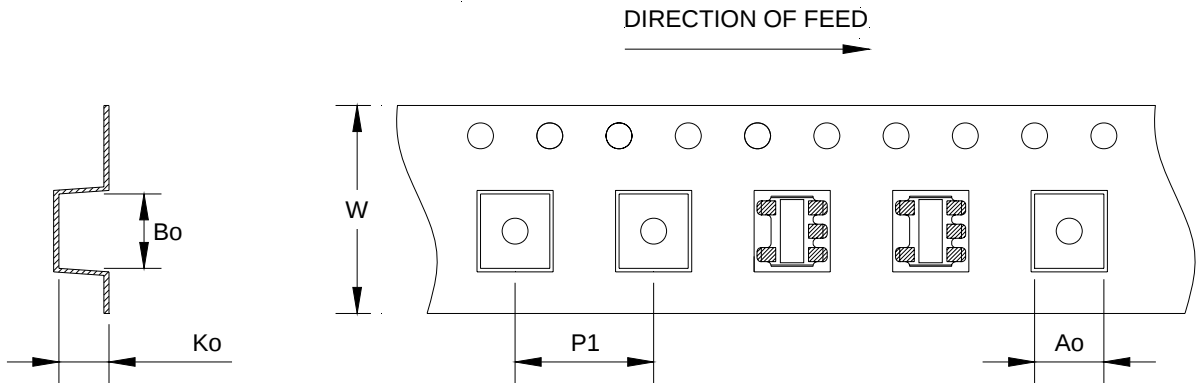

Item	Dimension
Ao	4.10mm +/- 0.1mm
Bo	4.20mm +/- 0.1mm
Ko	3.40mm +/- 0.1mm
W	12.00mm +/- 0.3mm
P1	8.00mm +/- 0.1mm

Ordering Information

Part number	Description
MABA-007236-C16423	2000 piece reel

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9