



8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
COPYRIGHT 20				20			
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.							
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION	
1855512-1		A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER	
1855512-2		A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER	
1855512-3		A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER	
1855512-6		A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER	
7-1855512-7		A	-	-	-	SPARE PARTS	

- △ RECOMMENDED SPARE PARTS
- △ GREASE LIGHTLY
- △ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE


*** WARNING**
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN. REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

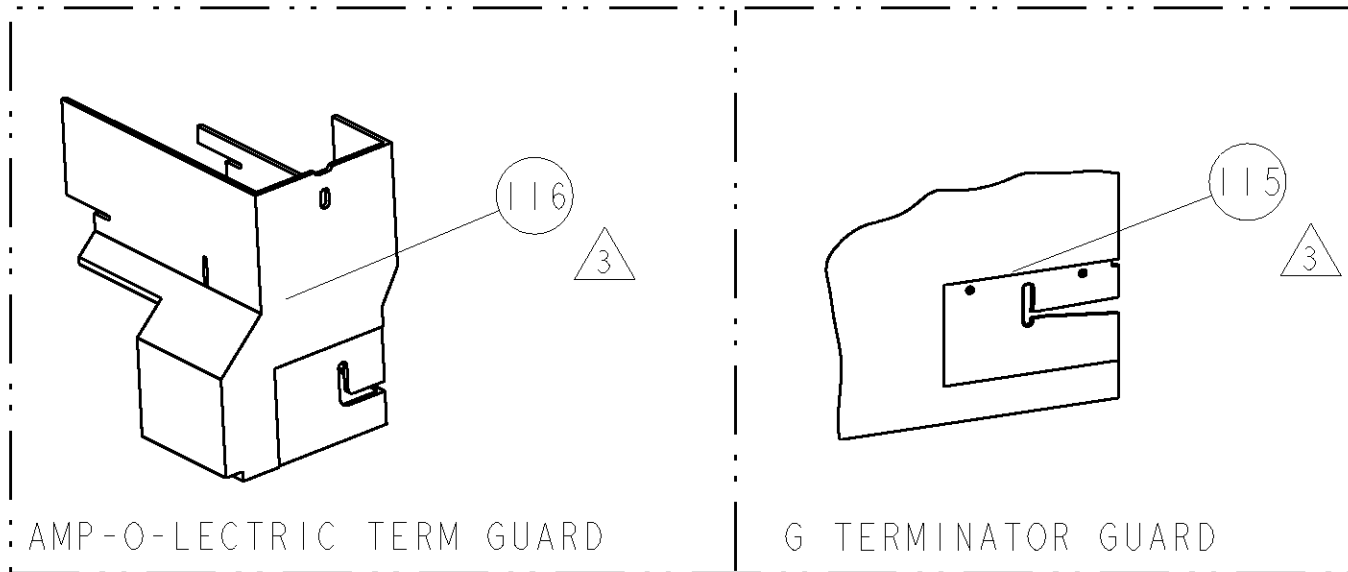

TERMINAL NAME: TAXI TERMIANL					
TE PN	DELPHI	DELPHI TERMINAL - DELPHI CRIMP SPECS			
1949980	12052221				
-	-	CRIMP HEIGHT		WIRE SIZE	REF SETTING
-	-	2.15mm+.05/- .05[.085+ .002/- .002]		3mm2	C5
-	-			-	-
-	-			-	-
-	-			-	-
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	3.61mm [.142]	F	3.0mm
-	-	INSUL	4.20mm [.165]	F	Ø3.040 - 3.200
WIRE STRIP LENGTH 5.10-6.10	TERM APPL SPEC DELPHI-CRIMP DATE	FEED 15.29	APPLICATOR INSTRUCTIONS 408-8040		SET UP GAGE 458637-1

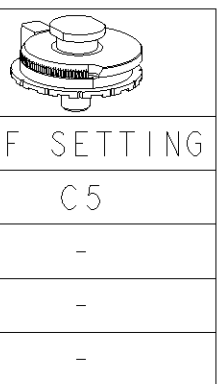

LOC		DIST		REVISONS			
A		66		P	LTR	DESCRIPTION	DATE
				A		RELEASED	01JUL2009
							LG
							GB

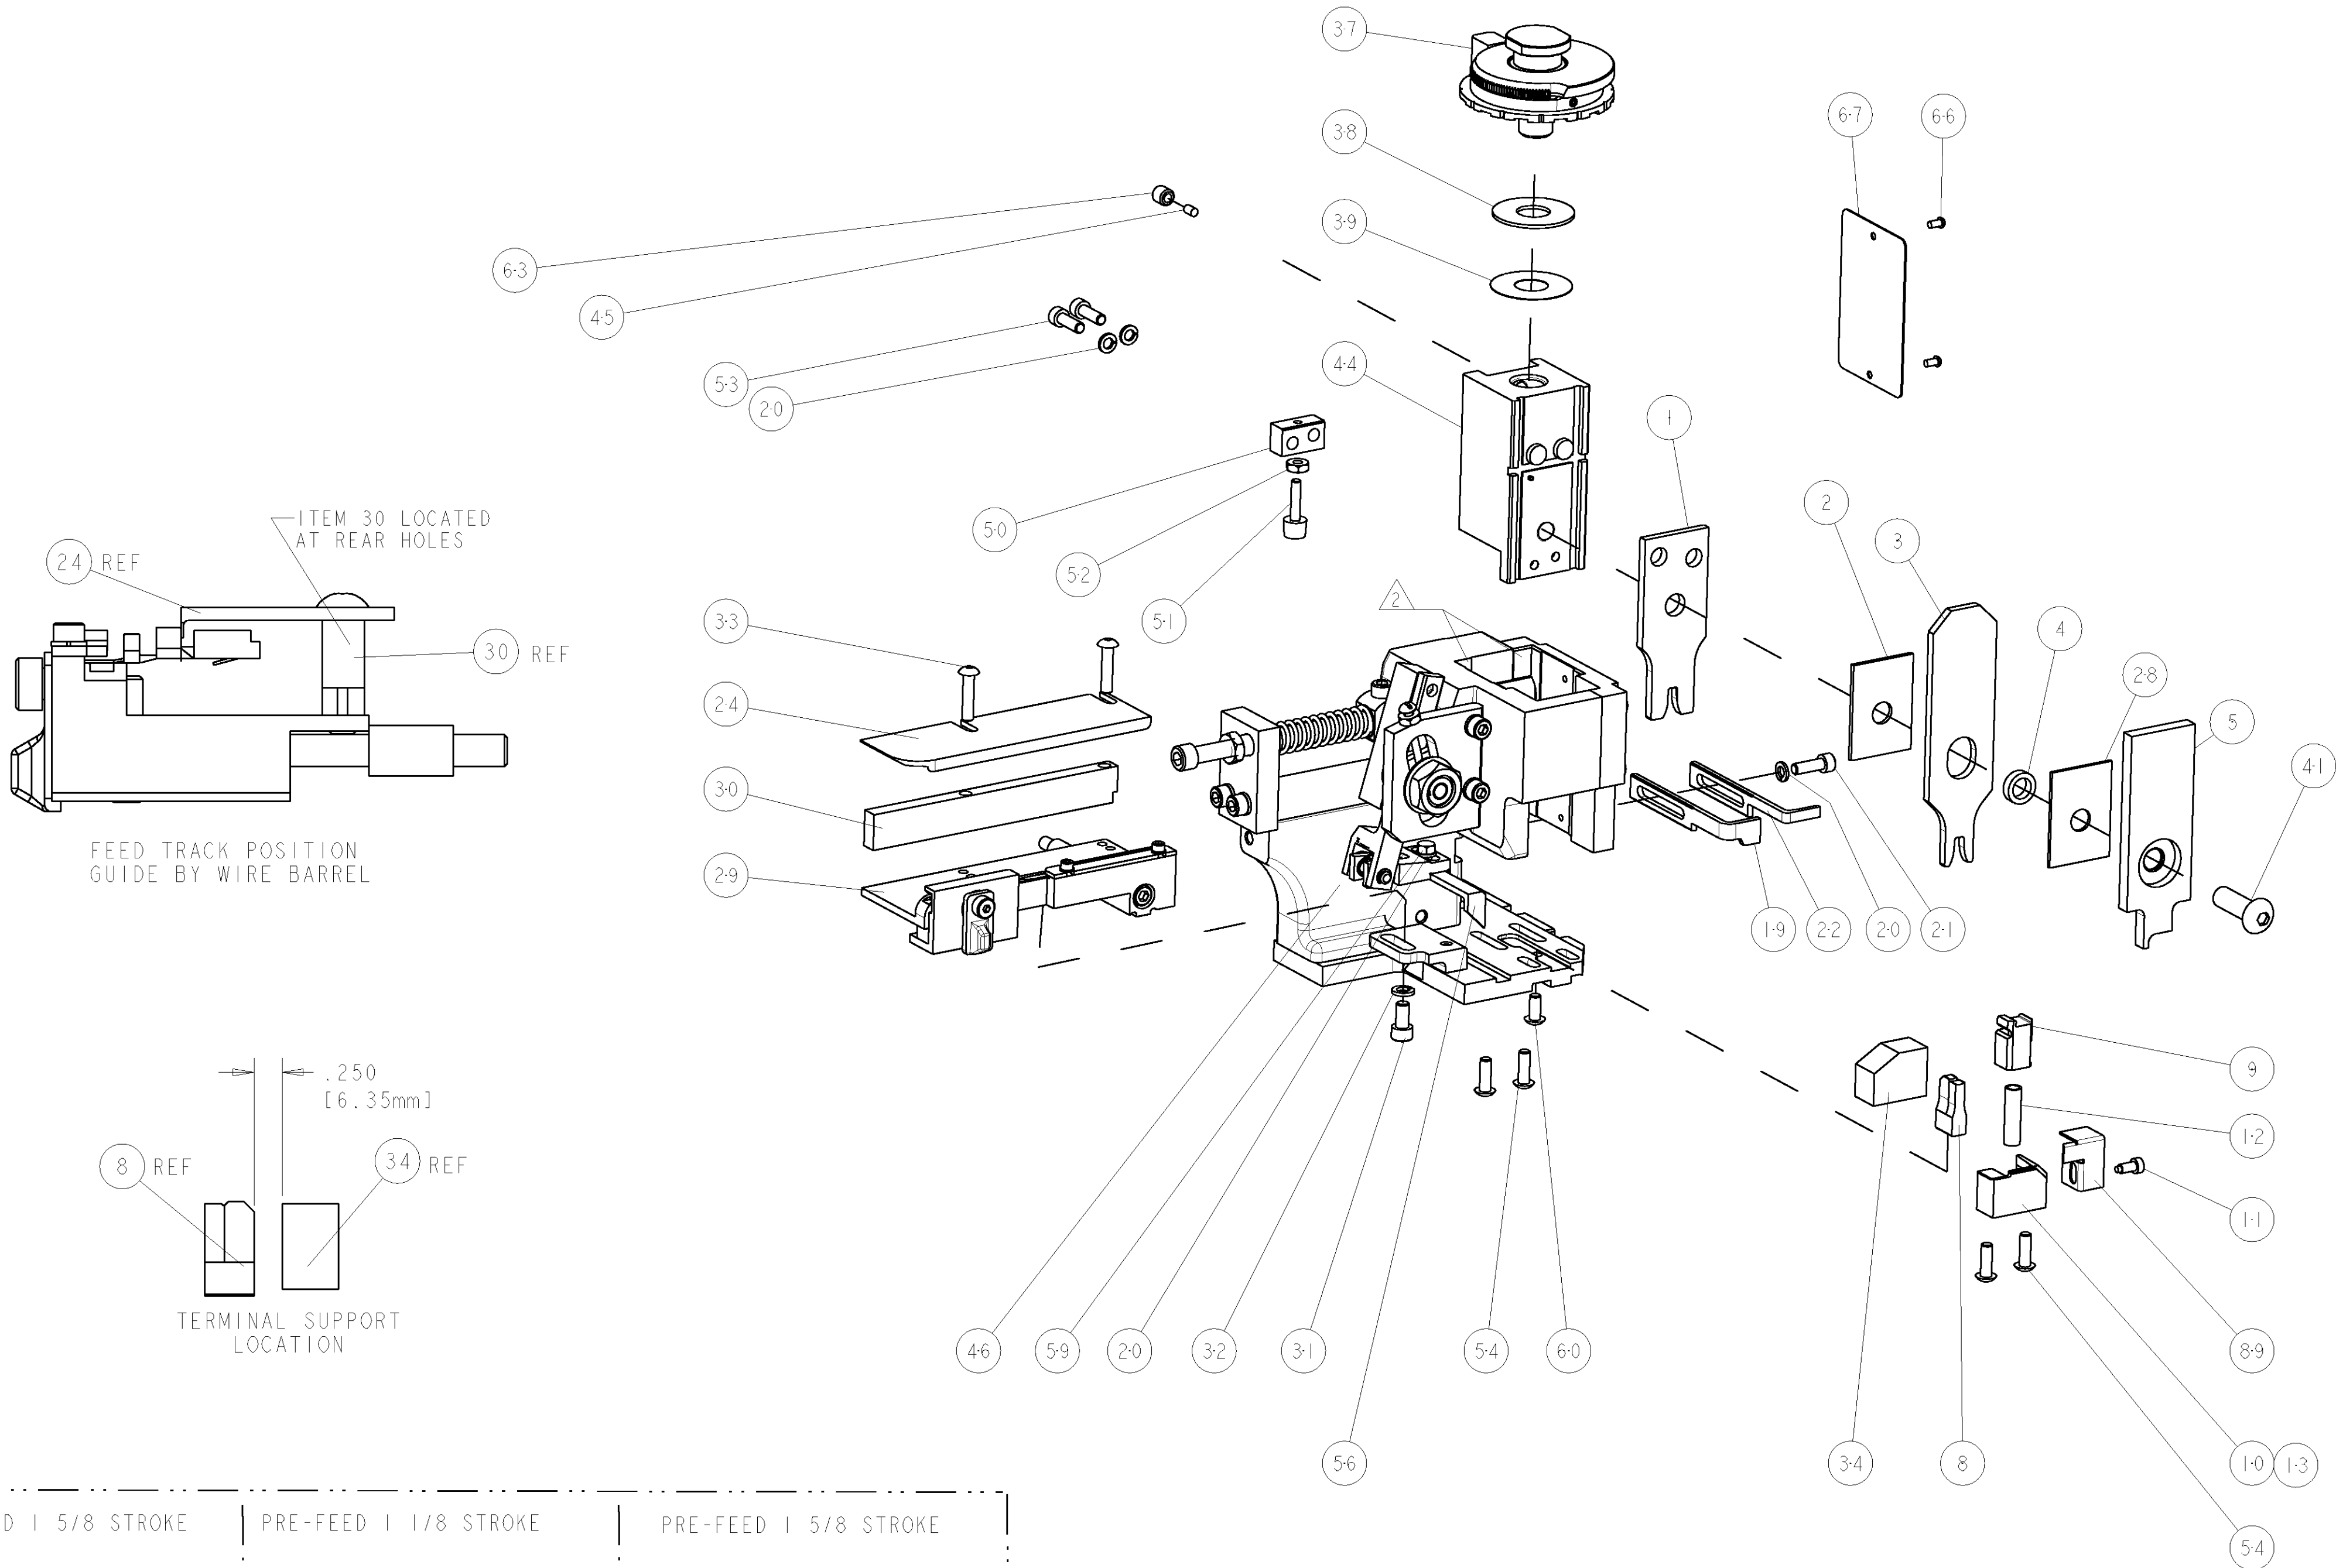

3	-	-	-	REF	-	..	455749-1	GUARD WINDOW	116
3	-	-	REF	-	-	..	679532-1	INSERT, GUARD	115
-	-	-	-	-	-	..	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
-	-	-	-	-	-	..	318563-1	GUARD, FRONT CHIP	89
-	-	-	-	-	-	..	4088040	SF APPL INST 408-8040	72
-	-	-	-	-	-	..	217238-1	GENERAL INSTRUCTION PKG	71
-	-	-	-	-	-	..	461264-5	PLATE, IDENTIFICATION	67
-	-	-	-	-	-	..	21017-2	SCREW, DRIVE	66
-	-	-	-	-	-	..	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	-	-	-	-	-	..	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	-	-	-	-	-	..	2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
-	-	-	-	-	-	..	458537-2	PAWL, FEED	56
-	-	-	-	-	-	..	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
-	-	-	-	-	-	..	2-21000-7	SCR, SKT HD CAP 8-32 X .500	53
-	-	-	-	-	-	..	21018-5	NUT, HEX, REG 6-32	52
-	-	-	-	-	-	..	811242-2	BUMPER, HOLD DOWN	51
-	-	-	-	-	-	..	690753-1	SPACER, TONKER	50
-	-	-	-	-	-	..	690602-6	CAM, PRE FEED, 1 5/8	49
-	-	-	-	-	-	..	690602-5	CAM, PRE FEED, 1 1/8	48
-	-	-	-	-	-	..	690501-4	CAM, POST-FEED 1 5/8	47
-	-	-	-	-	-	..	459456-1	APPL. BASIC SUB ASSY (SIDE WISE MQCA)	46
-	-	-	-	-	-	..	690191-1	PLUG,NYLON	45
-	-	-	-	-	-	..	1-819307-8	RAM, SIDE FEED	44
-	-	-	-	-	-	..	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	-	-	-	-	-	..	690125-1	SHIM SUB-ASSY	39
-	-	-	-	-	-	..	1-469367-1	SHIM	38
-	-	-	-	-	-	..	879103-2	FINE ADJUST HEAD ASSEMBLY	37
-	-	-	-	-	-	..	690786-3	TERMINAL SUPPORT	34
-	-	-	-	-	-	..	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	33
-	-	-	-	-	-	..	21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	-	-	-	-	-	..	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	-	-	-	-	-	..	1320908-3	SPACER, STRIP GUIDE	30
-	-	-	-	-	-	..	1633091-1	ASSEMBLY, STRIP GUIDE	29
-	-	-	-	-	-	..	1-455888-0	SPACER, CRIMPER	28
-	-	-	-	-	-	..	1320928-1	PLATE, STRIP GUIDE	24
-	-	-	-	-	-	..	690472-2	STRIPPER	22
-	-	-	-	-	-	..	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
-	-	-	-	-	-	..	21024-4	WASHER, SPRG LOCK, REG NO 8	20
-	-	-	-	-	-	..	691353-1	STRIPPER	19
-	-	-	-	-	-	..	679625-2	SHEAR HOLDER, FRONT (NO CUT)	13
-	-	-	-	-	-	..	3-22280-3	SPRING, COMPRESSION	12
-	-	-	-	-	-	..	690461-2	STOP, SHEAR	11
-	-	-	-	-	-	..	1-690459-0	SHEAR HOLDER, FRONT	10
-	-	-	-	-	-	..	454276-5	FLOATING SHEAR, FRONT	9
-	-	-	-	-	-	..	1633767-9	ANVIL, COMBINATION	8
-	-	-	-	-	-	..	-	-	7
-	-	-	-	-	-	..	-	-	6
-	-	-	-	-	-	..	1-455889-4	DEPRESSOR, SHEAR	5
-	-	-	-	-	-	..	2-238011-6	BLOCK, CRIMPER SPACER	4
-	-	-	-	-	-	..	8-1424909-9	CRIMPER, INSULATION F	3
-	-	-	-	-	-	..	1-455888-4	SPACER, CRIMPER	2
-	-	-	-	-	-	..	3-1633609-0	CRIMPER, WIRE	1

-77 -6 -3 -2 -1 U/M						PART NO	DESCRIPTION				ITEM NO	
THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO THE CONTINUING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.						DWN Y. YIN 01JUN2009	 Tyco Electronics Harrisburg, PA 17105-3608					
						CHK G. BAILEY 01JUN2009						
						APVD N. DEMING 01JUN2009	NAME					
DIMENSIONS:						TOLERANCES UNLESS OTHERWISE SPECIFIED:		FINE ADJUST SIDE FEED				
mm								HDM APPLICATOR				
						3 PLC ±		-				
						1 PLC ±0.1						
						2 PLC ±0.01						
						3 PLC ±0.001						
						4 PLC ±0.0001						
ANGLES						±						
MATERIAL						FINISH		SIZE CAGE CODE DRAWING NO				RESTRICTED TO
-						-		A 00779 C=1855512				-
CUSTOMER DRAWING								SCALE 3:5 SHEET 1 OF 1 REV A				

CUSTOMER VIEWABLE ASSEMBLY

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9