

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	ECR-16-009824	28JUL2016	GK	SD


REPLACED BY OCEAN STYLE APPLICATOR PART
NUMBER 2836299-2

FOR REPLACEMENT PARTS FOR APPLICATOR 1855097
REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED)
WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE
SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR
1855097

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	GOPALAKRISHNA HV			
		CHK	GOPALAKRISHNA HV			
DIMENSIONS:		APVD	STOUGH DALE			
		PRODUCT SPEC				
		APPLICATION SPEC				
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			A3		©- 1855097	
FINISH		CUSTOMER DRAWING		SCALE	SHEET 1 OF 2	REV A1

TERMINAL NAME: .250 TERMINAL FEMALE										
1438231-5		 REF SETTING	AMP TERMINAL				AMP CRIMP SPECS			
3-1438231-3			CRIMP HEIGHT					WIRE SIZE		
			B6		1.50 ±0.05mm [.059 ±.002]			18 AWG		
			C4		1.40 ±0.05mm [.055 ±.002]			20 AWG		
			-		NOT			USED		
		-		NOT			USED			
		CRIMP		SIZE		TYPE		RANGE		
		WIRE		1.98mm [.078]		F		20-18 AWG		
		INSUL		2.90mm [.114]		F		Ø2.05mm ² MAX		
WIRE STRIP LENGTH 4.7-5.5mm		TERM APPL SPEC NONE		FEED 23mm		APPL INSTRUCTION 408-8040		SET UP GAGE 458637-1		LAYOUT -

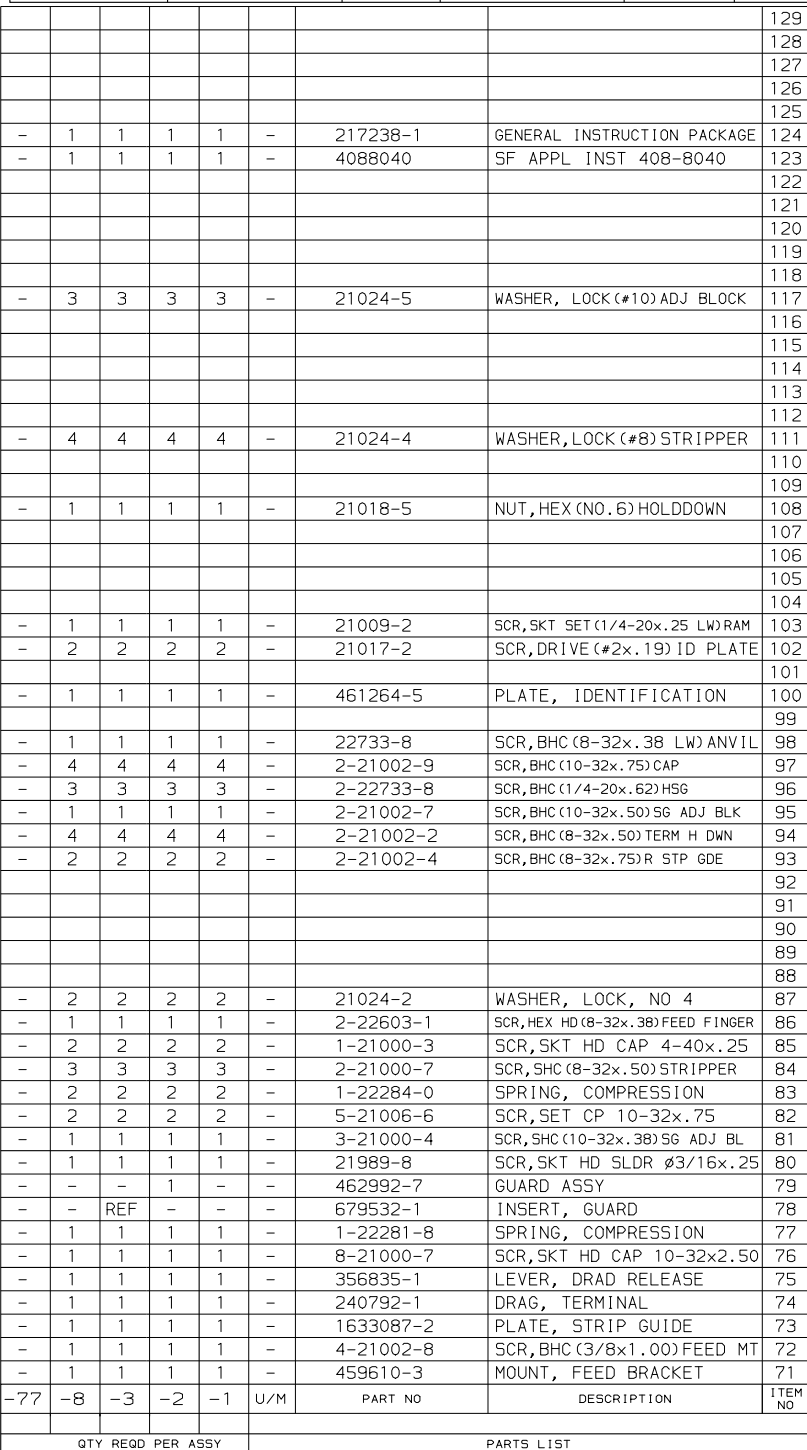

- * WARNING:
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE
SETTING. USE OF SETTINGS BELOW MIN REQ'D CRIMP
HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

	-	1	1	1	1	-	21024-8	WASHER, LOCK (3/8) FEED BRKT	70
A	-	-	-	1	-	-	692655-5	AIR FEED VALVE ASSY	69
	-	-	-	REF	-	-	24042-2	VALVE, SHUT OFF	68
A	-	-	-	REF	-	-	692655-6	AIR FEED VALVE ASSY	67
A	-	1	1	1	1	-	461065-1	AIR FEED ASSY (1 INCH)	66
	-	2	2	2	2	-	4-21000-0	SCR,SHC (10-32x1.25) AIR ASSY	65
									64
									63
									62
									61
	-	1	1	-	1	-	692655-7	AIR FEED VALVE ASSY	60
	-	1	1	1	1	-	454220-1	CAP, RAM	59
	-	1	1	1	1	-	454485-1	HOUSING	58
									57
	-	1	1	1	1	-	458537-2	PAWL, FEED	56
									55
									54
A	-	1	1	1	1	-	461062-1	FEED FINGER ASSY	53
									52
	-	1	1	1	1	-	811242-2	BUMPER, HOLDDOWN	51
	-	1	1	1	1	-	690753-1	SPACER, TONKER	50
									49
									48
									47
									46
	-	1	1	1	1	-	690191-1	PLUG, NYLON	45
	-	1	1	1	1	-	455673-1	RAM	44
									43
									42
	-	1	1	1	1	-	7-21002-9	BOLT, CRIMPER (5/16x1.00)	41
									40
	-	1	1	1	1	-	690125-1	SHIM SUB-ASSY	39
	-	1	1	1	1	-	1-469367-0	SHIM	38
	-	1	1	1	1	-	879103-3	FINE ADJUST SUBASSY	37
									36
									35
	-	1	1	1	1	-	690786-3	SUPPORT, TERMINAL	34
	-	1	1	1	1	-	455675-1	PLATE, BASE	33
									32
	-	1	1	1	1	-	1320908-1	SPACER, STRIP GUIDE	31
	-	1	1	1	1	-	455689-1	BLOCK, STRIP GUIDE ADJ	30
									29
	-	1	1	1	1	-	1-455888-0	SPACER, FRONT SHEAR DEP	28
									27
									26
									25
S	-	1	1	1	1	-	1320928-1	GUIDE, STRIP (REAR)	24
	-	1	1	1	1	-	1-690438-0	GUIDE, STRIP (FRONT)	23
	-	1	-	-	1	-	690472-2	STRIPPER	22
									21
									20
	-	-	1	1	-	-	691353-1	STRIPPER	19
									18
	-	1	-	-	-	-	679625-1	HOLDER SHEAR, FRONT (NO CUT)	17
	-	1	1	1	1	-	318563-1	GUARD, CHIP, FRONT	16
									15
									14
									13
	-	1	1	1	1	-	3-22280-3	SPRING, SHEAR	12
	-	1	1	1	1	-	690461-1	STOP, SHEAR	11
	-	-	1	1	1	-	690459-1	HOLDER, SHEAR (FRONT)	10
A	-	1	1	1	1	-	1-454276-9	SHEAR, FLOAT (FRONT)	9
I	1	1	1	1	1	-	1633330-6	ANVIL	8
									7
									6
	-	1	1	1	1	-	1-455889-4	DEPRESSOR, SHEAR (FRONT)	5
	-	1	1	1	1	-	1-238011-0	SPACER, BLOCK CRIMPER	4
A	1	1	1	1	1	-	6-683453-1	CRIMPER, INSULATION	3
	-	1	1	1	1	-	455888-9	SPACER, CRIMPER	2
A	1	1	1	1	1	-	1490019-4	CRIMPER, WIRE	1
	-77	-8	-3	-2	-1	U/M	PART NO	DESCRIPTION	ITEM NO

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9