
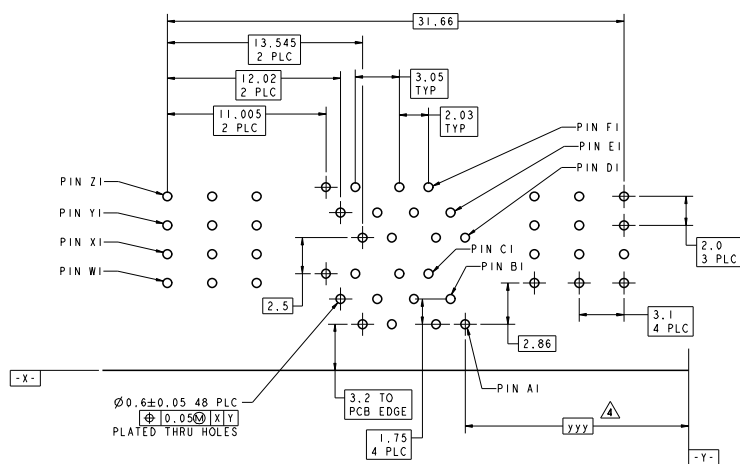
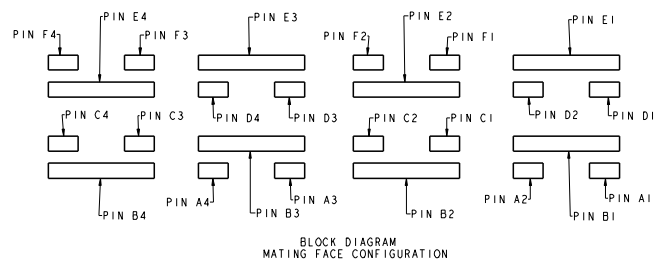
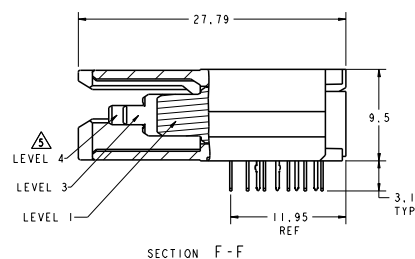
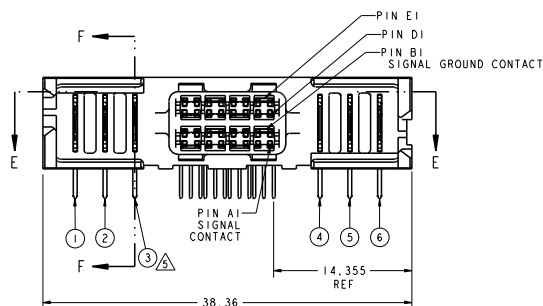


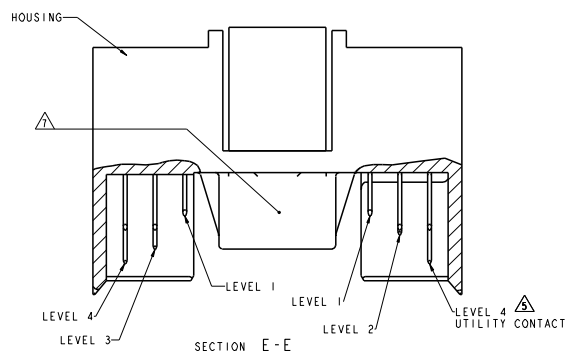

RECOMMENDED PC BOARD FOOTPRINT
COMPONENT SIDE SHOWN
SCALE 6:1

△ HOUSINGS: POLYESTER, UL 94V-0 RATED, NATURAL
SIGNAL AND SIGNAL GROUND CONTACTS: COPPER ALLOY
UTILITY CONTACTS: PHOSPHOR BRONZE

▲ UTILITY CONTACTS: 0.76um MIN GOLD IN CONTACT AREA,
2.54um MIN TIN ON PCB TAILS, OVER 1.27um MIN NICKEL OVER ALL.
SIGNAL AND SIGNAL GROUND CONTACTS: 0.76um MIN GOLD IN CONTACT AREA,
2.54um MIN TIN ON PCB TAILS, OVER 1.27um MIN NICKEL OVER ALL.

3. ROWS A, C, D, AND F ARE SIGNAL CONTACTS. ROWS B AND E ARE SIGNAL GROUND CONTACTS.

△ 4 DIMENSIONS PER CUSTOMER BOARD LAYOUT.

SEE UTILITY CONTACT SEQUENCE TABLE FOR LOCATION AND LEVEL/LENGTH OF UTILITY CONTACTS FOR EACH PRODUCT PART NUMBER. UTILITY LEVEL 1 CAN BE USED FOR SENSING, UTILITY LEVELS 2, 3, AND 4 CAN BE USED FOR POWER, GROUND, OR ESD. SEQUENCING SHOWN IN SECTION E-E SHOWS THREE LEVELS FOR COMPARISON, UTILITY LEVEL 2 EQUALS THE SIGNAL GROUND CONTACT LEVEL. SIGNAL LEVEL IS BETWEEN UTILITY LEVELS 1 AND 2.

6. BLOCK DIAGRAM AND CONTACT IDENTIFICATION APPLY TO COPLANAR NON-INVERTED APPLICATION ONLY. CONTACT IDENTIFICATION REVERSES FOR INVERTED APPLICATIONS, I.E. COPLANAR OR MID-BOARD INVERTED.

7 COMPANY LOGO IN APPROXIMATE AREA SHOWN.

LOC	DIST	REVISONS				
GP	00	#	LTN	DESCRIPTION	DATE	OWN
			B	REDRAWN PER ECO-10-012356	12NOV2010	CJV E

UTILITY CONTACT SEQUENCE TABLE						
UTILITY CONTACT LEVEL 1, 2, 3, OR 4						
1	2	4	4	2	2	6367551-1
4	3	2	2	3	4	6367551-1
①	②	③	④	⑤	⑥	PART NUMBER
UTILITY CONTACT LOCATION						

UTILITY CONTACT LOCATION						NUMBER	
DATE OF INFORMATION 08-19-75	DWG. CNC	DATE 12NOV2010		Tyco Electronics Harrisburg, PA 17105-3608			
	CNCL CNC	BILLANT					
	APPRO CNC	12NOV2010	NAME	Z-DOKA ADAPTER BOARD CONNECTOR ASSEMBLY 8 SIGNAL DIFF PAIR, 3 UTILITY CONTACTS PER SIDE			
	PRODUCT SPEC 108-1885						
	APPLICATION SPEC 114-1268		SIZE	CASE CODE	SHAWING NO.	RESTRICTIONS	
	REMARK		A1	00779	C=6367551		
CUSTOMER'S DRAWING			SCALE		SHEET	OF	PAGES

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9