

# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

Semiconductor Fuses • Flush End • 40 A–2000 A



### Description

Littelfuse PSR series high-speed square body fuses are specially designed for protection of power semiconductor devices such as diodes, triacs, IGBTs, SCRs, MOSFETs, and other solid state devices that are typically designed into power conversion and power conditioning equipment. Variable frequency drives, inverters, UPS, rectifiers, and soft-starters are examples of typical equipment designed with sensitive power semiconductor devices that cannot withstand any line surge or overcurrent conditions and require high-speed protection.

Littelfuse POWR-SPEED PSR series products offer optimized circuit protection at the extremely fast speed required to protect modern day power conversion devices. Such products are commonly found in numerous applications including pulp and paper industries, cranes and heavy-lifting equipment, processing industries, wastewater treatment plants, and various large factories and MRO facilities.

### Features/Benefits

- Best in class dc performance
- Extremely current limiting
- Superior cycling capability
- Global certification cURus, CCC\*
- Direct bus-bar mount design
- Visual and optional microswitch fuse blown indication
- Low watt-loss design
- Compliance with US and Canadian requirements
- Class aR performance according to IEC60269-4


### Applications

- Power conversion devices (UPS, inverter, rectifiers, drives)
- Dc systems (dc common bus, dc injection braking)
- Battery protection application (energy storage systems)
- Electric vehicle charging stations
- Heaters and power supplies

### Specifications

|                              |                                                                     |
|------------------------------|---------------------------------------------------------------------|
| <b>Voltage Range</b>         | Ac: 550 V–1300 V<br>Dc: 500 V–1000 V                                |
| <b>Amperage Range</b>        | 40 A–2000 A                                                         |
| <b>Interrupting Range</b>    | Ac: 100 kA–200 kA<br>Dc: 150 kA                                     |
| <b>Time Constant</b>         | 10 ms at IR                                                         |
| <b>Microswitch</b>           | Yes                                                                 |
| <b>Mounting</b>              | Flush-end style                                                     |
| <b>Material</b>              | Body: ceramic<br>Contacts: plated brass                             |
| <b>Approvals</b>             | UL 248-13 Recognized (File: E71611)<br>cURus (File: E71611)<br>CCC* |
| <b>Compliance</b>            | UL248-13, IEC 60269-4 (Class aR)                                    |
| <b>Environmental</b>         | RoHS Compliant, REACH                                               |
| <b>Operating Temperature</b> | -55 °C to +125 °C                                                   |
| <b>Storage Temperature</b>   | Up to +35 °C with relative humidity <65 %                           |
| <b>Country of Origin</b>     | Mexico                                                              |

### Ordering Part Number

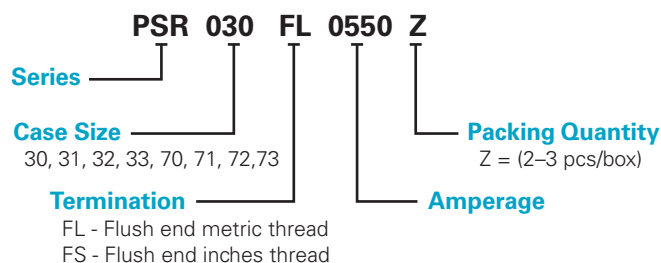

### Catalog Number

| SERIES | CASE SIZE | TERMINATION | AMPERAGE | CATALOG NUMBER | ORDERING PART NUMBER |
|--------|-----------|-------------|----------|----------------|----------------------|
| PSR    | 030       | FL          | 0550     | PSR030FL0550   | PSR030FL0550Z        |

### Recommended Accessories

**Microswitch:** MS3H1000C (case size 30 to 33)  
MS7H1500C (case size 70 to 73)

### Web Resources

Download technical documents: [Littelfuse.com/psr](http://Littelfuse.com/psr)

*Note: high-speed fuses are designed for fixed installations. They are not intended for use in moving vehicle applications.*

\*CCC Certification only for Flush End Metric Thread version

# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

### Electrical Characteristics

| CASE SIZE | CATALOG NUMBER          |                         | AMPERAGE RATING (A) | VOLTAGE RATING (V) |     |     | INTERRUPTING RATING |        | MELTING (PRE-ARC) I²T (A²s) | TOTAL CLEARING I²T (A²s) AT RATED VOLTAGE |         | WATT LOSS AT 100 % RATED CURRENT (W) | AGENCY CERTIFICATION |      |
|-----------|-------------------------|-------------------------|---------------------|--------------------|-----|-----|---------------------|--------|-----------------------------|-------------------------------------------|---------|--------------------------------------|----------------------|------|
|           | FLUSH END METRIC THREAD | FLUSH END INCHES THREAD |                     | AC                 |     | DC  | AC                  | DC     |                             | AC                                        | DC      |                                      | cURus                | CCC* |
|           |                         |                         |                     | IEC                | UL  |     |                     |        |                             |                                           |         |                                      |                      |      |
| 30        | PSR030FL0040            | PSR030FS0040            | 40                  | 690                | 700 | 600 | 200 kA              | 150 kA | 76                          | 280                                       | 260     | 12                                   | •                    | •    |
|           | PSR030FL0050            | PSR030FS0050            | 50                  | 690                | 700 | 600 | 200 kA              | 150 kA | 110                         | 598                                       | 384     | 15                                   | •                    | •    |
|           | PSR030FL0063            | PSR030FS0063            | 63                  | 690                | 700 | 600 | 200 kA              | 150 kA | 176                         | 1023                                      | 640     | 20                                   | •                    | •    |
|           | PSR030FL0080            | PSR030FS0080            | 80                  | 690                | 700 | 600 | 200 kA              | 150 kA | 304                         | 1728                                      | 1252    | 24                                   | •                    | •    |
|           | PSR030FL0100            | PSR030FS0100            | 100                 | 690                | 700 | 600 | 200 kA              | 150 kA | 437                         | 2835                                      | 1575    | 27                                   | •                    | •    |
|           | PSR030FL0125            | PSR030FS0125            | 125                 | 690                | 700 | 600 | 200 kA              | 150 kA | 707                         | 4684                                      | 2783    | 36                                   | •                    | •    |
|           | PSR030FL0160            | PSR030FS0160            | 160                 | 690                | 700 | 600 | 200 kA              | 150 kA | 1359                        | 9114                                      | 5507    | 39                                   | •                    | •    |
|           | PSR030FL0200            | PSR030FS0200            | 200                 | 690                | 700 | 600 | 200 kA              | 150 kA | 3012                        | 15169                                     | 14700   | 39                                   | •                    | •    |
|           | PSR030FL0250            | PSR030FS0250            | 250                 | 690                | 700 | 600 | 200 kA              | 150 kA | 4668                        | 29952                                     | 20833   | 50                                   | •                    | •    |
|           | PSR030FL0315            | PSR030FS0315            | 315                 | 690                | 700 | 600 | 200 kA              | 150 kA | 7131                        | 61830                                     | 31600   | 61                                   | •                    | •    |
|           | PSR030FL0350            | PSR030FS0350            | 350                 | 690                | 700 | 600 | 200 kA              | 150 kA | 12007                       | 85320                                     | 49273   | 62                                   | •                    | •    |
|           | PSR030FL0400            | PSR030FS0400            | 400                 | 690                | 700 | 600 | 200 kA              | 150 kA | 16209                       | 114750                                    | 63367   | 75                                   | •                    | •    |
|           | PSR030FL0450            | PSR030FS0450            | 450                 | 690                | 700 | 600 | 200 kA              | 150 kA | 23133                       | 160110                                    | 93533   | 75                                   | •                    | •    |
|           | PSR030FL0500            | PSR030FS0500            | 500                 | 690                | 700 | 600 | 200 kA              | 150 kA | 31429                       | 225180                                    | 137333  | 80                                   | •                    | •    |
|           | PSR030FL0550            | PSR030FS0550            | 550                 | 690                | 700 | 600 | 200 kA              | 150 kA | 44323                       | 268920                                    | 145400  | 78                                   | •                    | •    |
| 31        | PSR031FL0200            | PSR031FS0200            | 200                 | 690                | 700 | 600 | 200 kA              | 150 kA | 1965                        | 17334                                     | 16188   | 49                                   | •                    | •    |
|           | PSR031FL0250            | PSR031FS0250            | 250                 | 690                | 700 | 600 | 200 kA              | 150 kA | 3789                        | 35343                                     | 21080   | 52                                   | •                    | •    |
|           | PSR031FL0315            | PSR031FS0315            | 315                 | 690                | 700 | 600 | 200 kA              | 150 kA | 6862                        | 59130                                     | 30694   | 61                                   | •                    | •    |
|           | PSR031FL0350            | PSR031FS0350            | 350                 | 690                | 700 | 600 | 200 kA              | 150 kA | 9523                        | 76140                                     | 40996   | 63                                   | •                    | •    |
|           | PSR031FL0400            | PSR031FS0400            | 400                 | 690                | 700 | 600 | 200 kA              | 150 kA | 14770                       | 124335                                    | 64359   | 63                                   | •                    | •    |
|           | PSR031FL0450            | PSR031FS0450            | 450                 | 690                | 700 | 600 | 200 kA              | 150 kA | 22457                       | 178200                                    | 97444   | 68                                   | •                    | •    |
|           | PSR031FL0500            | PSR031FS0500            | 500                 | 690                | 700 | 600 | 200 kA              | 150 kA | 29751                       | 251505                                    | 125935  | 74                                   | •                    | •    |
|           | PSR031FL0550            | PSR031FS0550            | 550                 | 690                | 700 | 600 | 200 kA              | 150 kA | 42056                       | 289170                                    | 171845  | 79                                   | •                    | •    |
|           | PSR031FL0630            | PSR031FS0630            | 630                 | 690                | 700 | 600 | 200 kA              | 150 kA | 73513                       | 507465                                    | 276315  | 86                                   | •                    | •    |
|           | PSR031FL0700            | PSR031FS0700            | 700                 | 690                | 700 | 600 | 200 kA              | 150 kA | 98187                       | 601425                                    | 337260  | 89                                   | •                    | •    |
|           | PSR031FL0800            | PSR031FS0800            | 800                 | 690                | 700 | 600 | 200 kA              | 150 kA | 137208                      | 848880                                    | 502800  | 107                                  | •                    | •    |
| 32        | PSR032FL0400            | PSR032FS0400            | 400                 | 690                | 700 | 600 | 200 kA              | 150 kA | 11104                       | 79650                                     | 44533   | 82                                   | •                    | •    |
|           | PSR032FL0450            | PSR032FS0450            | 450                 | 690                | 700 | 600 | 200 kA              | 150 kA | 15535                       | 116100                                    | 65463   | 88                                   | •                    | •    |
|           | PSR032FL0500            | PSR032FS0500            | 500                 | 690                | 700 | 600 | 200 kA              | 150 kA | 21573                       | 161460                                    | 88277   | 94                                   | •                    | •    |
|           | PSR032FL0550            | PSR032FS0550            | 550                 | 690                | 700 | 600 | 200 kA              | 150 kA | 26327                       | 177660                                    | 107960  | 104                                  | •                    | •    |
|           | PSR032FL0630            | PSR032FS0630            | 630                 | 690                | 700 | 600 | 200 kA              | 150 kA | 34790                       | 234900                                    | 156963  | 110                                  | •                    | •    |
|           | PSR032FL0700            | PSR032FS0700            | 700                 | 690                | 700 | 600 | 200 kA              | 150 kA | 51191                       | 291870                                    | 209287  | 117                                  | •                    | •    |
|           | PSR032FL0800            | PSR032FS0800            | 800                 | 690                | 700 | 600 | 200 kA              | 150 kA | 60125                       | 472770                                    | 249000  | 145                                  | •                    | •    |
|           | PSR032FL0900            | PSR032FS0900            | 900                 | 690                | 700 | 600 | 200 kA              | 150 kA | 107785                      | 764100                                    | 404000  | 145                                  | •                    | •    |
|           | PSR032FL1000            | PSR032FS1000            | 1000                | 690                | 700 | 600 | 200 kA              | 150 kA | 190102                      | 933120                                    | 672333  | 146                                  | •                    | •    |
|           | PSR032FL1100            | PSR032FS1100            | 1100                | 690                | 700 | 600 | 200 kA              | 150 kA | 225379                      | 1247400                                   | 744000  | 149                                  | •                    | •    |
| 33        | PSR033FL0450            | PSR033FS0450            | 450                 | 690                | 700 | 600 | 200 kA              | 150 kA | 13600                       | 106380                                    | 58947   | 99                                   | •                    | •    |
|           | PSR033FL0500            | PSR033FS0500            | 500                 | 690                | 700 | 600 | 200 kA              | 150 kA | 16434                       | 140400                                    | 77846   | 107                                  | •                    | •    |
|           | PSR033FL0550            | PSR033FS0550            | 550                 | 690                | 700 | 600 | 200 kA              | 150 kA | 23314                       | 187650                                    | 100461  | 108                                  | •                    | •    |
|           | PSR033FL0630            | PSR033FS0630            | 630                 | 690                | 700 | 600 | 200 kA              | 150 kA | 38727                       | 285930                                    | 142437  | 113                                  | •                    | •    |
|           | PSR033FL0700            | PSR033FS0700            | 700                 | 690                | 700 | 600 | 200 kA              | 150 kA | 56763                       | 392580                                    | 209863  | 113                                  | •                    | •    |
|           | PSR033FL0800            | PSR033FS0800            | 800                 | 690                | 700 | 600 | 200 kA              | 150 kA | 84691                       | 575505                                    | 348500  | 120                                  | •                    | •    |
|           | PSR033FL0900            | PSR033FS0900            | 900                 | 690                | 700 | 600 | 200 kA              | 150 kA | 122619                      | 740340                                    | 451177  | 122                                  | •                    | •    |
|           | PSR033FL1000            | PSR033FS1000            | 1000                | 690                | 700 | 600 | 200 kA              | 150 kA | 222350                      | 1170450                                   | 787750  | 124                                  | •                    | •    |
|           | PSR033FL1100            | PSR033FS1100            | 1100                | 690                | 700 | 600 | 200 kA              | 150 kA | 310824                      | 1568700                                   | 821400  | 127                                  | •                    | •    |
|           | PSR033FL1250            | PSR033FS1250            | 1250                | 690                | 700 | 600 | 200 kA              | 150 kA | 476902                      | 2403000                                   | 1674333 | 131                                  | •                    | •    |
|           | PSR033FL1400            | PSR033FS1400            | 1400                | 690                | 700 | 500 | 200 kA              | 150 kA | 583552                      | 2920050                                   | 1979750 | 144                                  | •                    | •    |
|           | PSR033FL1500            | PSR033FS1500            | 1500                | 600                | 650 | 500 | 200 kA              | 150 kA | 674538                      | 2433200                                   | 1996733 | 163                                  | •                    | •    |
|           | PSR033FL1600            | PSR033FS1600            | 1600                | 600                | 650 | 500 | 200 kA              | 150 kA | 779948                      | 2942800                                   | 2301633 | 182                                  | •                    | •    |
|           | PSR033FL1800            | PSR033FS1800            | 1800                | 600                | 650 | 500 | 200 kA              | 150 kA | 952196                      | 3785040                                   | 2724180 | 224                                  | •                    | •    |
|           | PSR033FL2000            | PSR033FS2000            | 2000                | 550                | 600 | 500 | 200 kA              | 150 kA | 1234315                     | 4131600                                   | 3755180 | 222                                  | •                    | •    |

\*CCC Certification only on Flush End Metric Thread Version

# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

### Electrical Characteristics (cont.)

| CASE SIZE    | CATALOG NUMBER          |                         | AMPERAGE RATING (A) | VOLTAGE RATING (V) |      |        | INTERRUPTING RATING |        | MELTING (PRE-ARC) I²T (A²s) | TOTAL CLEARING I²T (A²s) AT RATED VOLTAGE |        | WATT LOSS AT 100 % RATED CURRENT (W) | AGENCY CERTIFICATION |   |
|--------------|-------------------------|-------------------------|---------------------|--------------------|------|--------|---------------------|--------|-----------------------------|-------------------------------------------|--------|--------------------------------------|----------------------|---|
|              | FLUSH END METRIC THREAD | FLUSH END INCHES THREAD |                     | AC                 |      | DC     | AC                  | DC     |                             | AC                                        | DC     |                                      |                      |   |
|              |                         |                         |                     | IEC                | UL   |        |                     |        |                             |                                           |        |                                      |                      |   |
| 70           | PSR070FL0050            | PSR070FS0050            | 50                  | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 177                         | 2050                                      | 400    | 21                                   | •                    | • |
|              | PSR070FL0063            | PSR070FS0063            | 63                  | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 273                         | 3399                                      | 900    | 23                                   | •                    | • |
|              | PSR070FL0080            | PSR070FS0080            | 80                  | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 583                         | 6732                                      | 2200   | 24                                   | •                    | • |
|              | PSR070FL0100            | PSR070FS0100            | 100                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 974                         | 10996                                     | 3750   | 29                                   | •                    | • |
|              | PSR070FL0125            | PSR070FS0125            | 125                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 1352                        | 13011                                     | 5150   | 43                                   | •                    | • |
|              | PSR070FL0160            | PSR070FS0160            | 160                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 2377                        | 25662                                     | 8950   | 51                                   | •                    | • |
|              | PSR070FL0200            | PSR070FS0200            | 200                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 4177                        | 39087                                     | 17267  | 61                                   | •                    | • |
|              | PSR070FL0250            | PSR070FS0250            | 250                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 8629                        | 89790                                     | 36750  | 71                                   | •                    | • |
|              | PSR070FL0280            | PSR070FS0280            | 280                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 11844                       | 113201                                    | 46750  | 71                                   | •                    | • |
| PSR070FL0315 | PSR070FS0315            | 315                     | 1250                | 1300               | 1000 | 100 kA | 150 kA              | 18162  | 142051                      | 66833                                     | 69     | •                                    | •                    |   |
| 71           | PSR071FL0160            | PSR071FS0160            | 160                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 2756                        | 24600                                     | 8800   | 42                                   | •                    | • |
|              | PSR071FL0200            | PSR071FS0200            | 200                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 4918                        | 50307                                     | 19050  | 52                                   | •                    | • |
|              | PSR071FL0250            | PSR071FS0250            | 250                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 10592                       | 104427                                    | 43100  | 54                                   | •                    | • |
|              | PSR071FL0280            | PSR071FS0280            | 280                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 13763                       | 131897                                    | 54150  | 58                                   | •                    |   |
|              | PSR071FL0315            | PSR071FS0315            | 315                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 20882                       | 200244                                    | 67450  | 60                                   | •                    | • |
|              | PSR071FL0350            | PSR071FS0350            | 350                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 23301                       | 225500                                    | 102500 | 71                                   | •                    | • |
|              | PSR071FL0400            | PSR071FS0400            | 400                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 43211                       | 374986                                    | 185000 | 69                                   | •                    | • |
| PSR071FL0450 | PSR071FS0450            | 450                     | 1250                | 1300               | 1000 | 100 kA | 150 kA              | 55915  | 452394                      | 241333                                    | 88     | •                                    | •                    |   |
| 72           | PSR072FL0250            | PSR072FS0250            | 250                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 7737                        | 72789                                     | 28567  | 63                                   | •                    | • |
|              | PSR072FL0280            | PSR072FS0280            | 280                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 10915                       | 124538                                    | 46897  | 62                                   | •                    | • |
|              | PSR072FL0315            | PSR072FS0315            | 315                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 16187                       | 145140                                    | 58867  | 67                                   | •                    | • |
|              | PSR072FL0350            | PSR072FS0350            | 350                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 18727                       | 160447                                    | 69633  | 80                                   | •                    | • |
|              | PSR072FL0400            | PSR072FS0400            | 400                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 27112                       | 243540                                    | 108000 | 89                                   | •                    | • |
|              | PSR072FL0450            | PSR072FS0450            | 450                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 35927                       | 406413                                    | 159133 | 107                                  | •                    | • |
|              | PSR072FL0500            | PSR072FS0500            | 500                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 50398                       | 425375                                    | 216333 | 115                                  | •                    | • |
|              | PSR072FL0550            | PSR072FS0550            | 550                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 73858                       | 539833                                    | 271333 | 115                                  | •                    | • |
| PSR072FL0630 | PSR072FS0630            | 630                     | 1250                | 1300               | 1000 | 100 kA | 150 kA              | 126126 | 942180                      | 436000                                    | 119    | •                                    | •                    |   |
| 73           | PSR073FL0315            | PSR073FS0315            | 315                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 10245                       | 106600                                    | 38650  | 88                                   | •                    | • |
|              | PSR073FL0350            | PSR073FS0350            | 350                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 13586                       | 159627                                    | 57467  | 96                                   | •                    | • |
|              | PSR073FL0400            | PSR073FS0400            | 400                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 19797                       | 211273                                    | 86800  | 124                                  | •                    | • |
|              | PSR073FL0450            | PSR073FS0450            | 450                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 29834                       | 279073                                    | 114333 | 122                                  | •                    | • |
|              | PSR073FL0500            | PSR073FS0500            | 500                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 42751                       | 416437                                    | 184500 | 121                                  | •                    | • |
|              | PSR073FL0550            | PSR073FS0550            | 550                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 55513                       | 491713                                    | 224500 | 130                                  | •                    | • |
|              | PSR073FL0630            | PSR073FS0630            | 630                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 94649                       | 804338                                    | 377500 | 136                                  | •                    | • |
|              | PSR073FL0700            | PSR073FS0700            | 700                 | 1250               | 1300 | 1000   | 100 kA              | 150 kA | 158097                      | 1170960                                   | 575667 | 135                                  | •                    | • |

\*CCC Cetrification only on Flush End Metric Thread Version

# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

### Ordering Information

| CASE SIZE | FLUSH END - METRIC THREAD |                      |             | FLUSH END - INCHES THREAD |                      |             | BOX QUANTITY PCS/BOX |
|-----------|---------------------------|----------------------|-------------|---------------------------|----------------------|-------------|----------------------|
|           | CATALOG NUMBER            | ORDERING PART NUMBER | UPC         | CATALOG NUMBER            | ORDERING PART NUMBER | UPC         |                      |
| 30        | PSR030FL0040              | PSR030FL0040Z        | 07945820436 | PSR030FS0040              | PSR030FS0040Z        | 07945820451 | 3 pcs/box            |
|           | PSR030FL0050              | PSR030FL0050Z        | 07945820437 | PSR030FS0050              | PSR030FS0050Z        | 07945820452 | 3 pcs/box            |
|           | PSR030FL0063              | PSR030FL0063Z        | 07945820438 | PSR030FS0063              | PSR030FS0063Z        | 07945820453 | 3 pcs/box            |
|           | PSR030FL0080              | PSR030FL0080Z        | 07945820439 | PSR030FS0080              | PSR030FS0080Z        | 07945820454 | 3 pcs/box            |
|           | PSR030FL0100              | PSR030FL0100Z        | 07945820440 | PSR030FS0100              | PSR030FS0100Z        | 07945820455 | 3 pcs/box            |
|           | PSR030FL0125              | PSR030FL0125Z        | 07945820441 | PSR030FS0125              | PSR030FS0125Z        | 07945820456 | 3 pcs/box            |
|           | PSR030FL0160              | PSR030FL0160Z        | 07945820442 | PSR030FS0160              | PSR030FS0160Z        | 07945820457 | 3 pcs/box            |
|           | PSR030FL0200              | PSR030FL0200Z        | 07945820443 | PSR030FS0200              | PSR030FS0200Z        | 07945820458 | 3 pcs/box            |
|           | PSR030FL0250              | PSR030FL0250Z        | 07945820444 | PSR030FS0250              | PSR030FS0250Z        | 07945820459 | 3 pcs/box            |
|           | PSR030FL0315              | PSR030FL0315Z        | 07945820445 | PSR030FS0315              | PSR030FS0315Z        | 07945820460 | 3 pcs/box            |
|           | PSR030FL0350              | PSR030FL0350Z        | 07945820446 | PSR030FS0350              | PSR030FS0350Z        | 07945820461 | 3 pcs/box            |
|           | PSR030FL0400              | PSR030FL0400Z        | 07945820447 | PSR030FS0400              | PSR030FS0400Z        | 07945820462 | 3 pcs/box            |
|           | PSR030FL0450              | PSR030FL0450Z        | 07945820448 | PSR030FS0450              | PSR030FS0450Z        | 07945820463 | 3 pcs/box            |
|           | PSR030FL0500              | PSR030FL0500Z        | 07945820449 | PSR030FS0500              | PSR030FS0500Z        | 07945820464 | 3 pcs/box            |
|           | PSR030FL0550              | PSR030FL0550Z        | 07945820450 | PSR030FS0550              | PSR030FS0550Z        | 07945820465 | 3 pcs/box            |
| 31        | PSR031FL0200              | PSR031FL0200Z        | 07945820466 | PSR031FS0200              | PSR031FS0200Z        | 07945820477 | 3 pcs/box            |
|           | PSR031FL0250              | PSR031FL0250Z        | 07945820467 | PSR031FS0250              | PSR031FS0250Z        | 07945820478 | 3 pcs/box            |
|           | PSR031FL0315              | PSR031FL0315Z        | 07945820468 | PSR031FS0315              | PSR031FS0315Z        | 07945820479 | 3 pcs/box            |
|           | PSR031FL0350              | PSR031FL0350Z        | 07945820469 | PSR031FS0350              | PSR031FS0350Z        | 07945820480 | 3 pcs/box            |
|           | PSR031FL0400              | PSR031FL0400Z        | 07945820470 | PSR031FS0400              | PSR031FS0400Z        | 07945820481 | 3 pcs/box            |
|           | PSR031FL0450              | PSR031FL0450Z        | 07945820471 | PSR031FS0450              | PSR031FS0450Z        | 07945820482 | 3 pcs/box            |
|           | PSR031FL0500              | PSR031FL0500Z        | 07945820472 | PSR031FS0500              | PSR031FS0500Z        | 07945820483 | 3 pcs/box            |
|           | PSR031FL0550              | PSR031FL0550Z        | 07945820473 | PSR031FS0550              | PSR031FS0550Z        | 07945820484 | 3 pcs/box            |
|           | PSR031FL0630              | PSR031FL0630Z        | 07945820474 | PSR031FS0630              | PSR031FS0630Z        | 07945820485 | 3 pcs/box            |
|           | PSR031FL0700              | PSR031FL0700Z        | 07945820475 | PSR031FS0700              | PSR031FS0700Z        | 07945820486 | 3 pcs/box            |
|           | PSR031FL0800              | PSR031FL0800Z        | 07945820476 | PSR031FS0800              | PSR031FS0800Z        | 07945820487 | 3 pcs/box            |
| 32        | PSR032FL0400              | PSR032FL0400Z        | 07945820488 | PSR032FS0400              | PSR032FS0400Z        | 07945820498 | 3 pcs/box            |
|           | PSR032FL0450              | PSR032FL0450Z        | 07945820489 | PSR032FS0450              | PSR032FS0450Z        | 07945820499 | 3 pcs/box            |
|           | PSR032FL0500              | PSR032FL0500Z        | 07945820490 | PSR032FS0500              | PSR032FS0500Z        | 07945820500 | 3 pcs/box            |
|           | PSR032FL0550              | PSR032FL0550Z        | 07945820491 | PSR032FS0550              | PSR032FS0550Z        | 07945820501 | 3 pcs/box            |
|           | PSR032FL0630              | PSR032FL0630Z        | 07945820492 | PSR032FS0630              | PSR032FS0630Z        | 07945820502 | 3 pcs/box            |
|           | PSR032FL0700              | PSR032FL0700Z        | 07945820493 | PSR032FS0700              | PSR032FS0700Z        | 07945820503 | 3 pcs/box            |
|           | PSR032FL0800              | PSR032FL0800Z        | 07945820494 | PSR032FS0800              | PSR032FS0800Z        | 07945820504 | 3 pcs/box            |
|           | PSR032FL0900              | PSR032FL0900Z        | 07945820495 | PSR032FS0900              | PSR032FS0900Z        | 07945820505 | 3 pcs/box            |
|           | PSR032FL1000              | PSR032FL1000Z        | 07945820496 | PSR032FS1000              | PSR032FS1000Z        | 07945820506 | 3 pcs/box            |
|           | PSR032FL1100              | PSR032FL1100Z        | 07945820497 | PSR032FS1100              | PSR032FS1100Z        | 07945820507 | 3 pcs/box            |
| 33        | PSR033FL0450              | PSR033FL0450Z        | 07945822163 | PSR033FS0450              | PSR033FS0450Z        | 07945822164 | 3 pcs/box            |
|           | PSR033FL0500              | PSR033FL0500Z        | 07945820508 | PSR033FS0500              | PSR033FS0500Z        | 07945820522 | 3 pcs/box            |
|           | PSR033FL0550              | PSR033FL0550Z        | 07945820509 | PSR033FS0550              | PSR033FS0550Z        | 07945820523 | 3 pcs/box            |
|           | PSR033FL0630              | PSR033FL0630Z        | 07945820510 | PSR033FS0630              | PSR033FS0630Z        | 07945820524 | 3 pcs/box            |
|           | PSR033FL0700              | PSR033FL0700Z        | 07945820511 | PSR033FS0700              | PSR033FS0700Z        | 07945820525 | 3 pcs/box            |
|           | PSR033FL0800              | PSR033FL0800Z        | 07945820512 | PSR033FS0800              | PSR033FS0800Z        | 07945820526 | 3 pcs/box            |
|           | PSR033FL0900              | PSR033FL0900Z        | 07945820513 | PSR033FS0900              | PSR033FS0900Z        | 07945820527 | 3 pcs/box            |
|           | PSR033FL1000              | PSR033FL1000Z        | 07945820514 | PSR033FS1000              | PSR033FS1000Z        | 07945820528 | 3 pcs/box            |
|           | PSR033FL1100              | PSR033FL1100Z        | 07945820515 | PSR033FS1100              | PSR033FS1100Z        | 07945820529 | 3 pcs/box            |
|           | PSR033FL1250              | PSR033FL1250Z        | 07945820516 | PSR033FS1250              | PSR033FS1250Z        | 07945820530 | 3 pcs/box            |
|           | PSR033FL1400              | PSR033FL1400Z        | 07945820517 | PSR033FS1400              | PSR033FS1400Z        | 07945820531 | 3 pcs/box            |
|           | PSR033FL1500              | PSR033FL1500Z        | 07945820518 | PSR033FS1500              | PSR033FS1500Z        | 07945820532 | 3 pcs/box            |
|           | PSR033FL1600              | PSR033FL1600Z        | 07945820519 | PSR033FS1600              | PSR033FS1600Z        | 07945820533 | 3 pcs/box            |
|           | PSR033FL1800              | PSR033FL1800Z        | 07945820520 | PSR033FS1800              | PSR033FS1800Z        | 07945820534 | 3 pcs/box            |
|           | PSR033FL2000              | PSR033FL2000Z        | 07945820521 | PSR033FS2000              | PSR033FS2000Z        | 07945820535 | 3 pcs/box            |

# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY


### Ordering Information (cont.)

| CASE SIZE | FLUSH END - METRIC THREAD |                      |             | FLUSH END - INCHES THREAD |                      |             | BOX QUANTITY PCS/BOX |
|-----------|---------------------------|----------------------|-------------|---------------------------|----------------------|-------------|----------------------|
|           | CATALOG NUMBER            | ORDERING PART NUMBER | UPC         | CATALOG NUMBER            | ORDERING PART NUMBER | UPC         |                      |
| 70        | PSR070FL0050              | PSR070FL0050Z        | 07945820536 | PSR070FS0050              | PSR070FS0050Z        | 07945820546 | 2 pcs/box            |
|           | PSR070FL0063              | PSR070FL0063Z        | 07945820537 | PSR070FS0063              | PSR070FS0063Z        | 07945820547 | 2 pcs/box            |
|           | PSR070FL0080              | PSR070FL0080Z        | 07945820538 | PSR070FS0080              | PSR070FS0080Z        | 07945820548 | 2 pcs/box            |
|           | PSR070FL0100              | PSR070FL0100Z        | 07945820539 | PSR070FS0100              | PSR070FS0100Z        | 07945820549 | 2 pcs/box            |
|           | PSR070FL0125              | PSR070FL0125Z        | 07945820540 | PSR070FS0125              | PSR070FS0125Z        | 07945820550 | 2 pcs/box            |
|           | PSR070FL0160              | PSR070FL0160Z        | 07945820541 | PSR070FS0160              | PSR070FS0160Z        | 07945820551 | 2 pcs/box            |
|           | PSR070FL0200              | PSR070FL0200Z        | 07945820542 | PSR070FS0200              | PSR070FS0200Z        | 07945820552 | 2 pcs/box            |
|           | PSR070FL0250              | PSR070FL0250Z        | 07945820543 | PSR070FS0250              | PSR070FS0250Z        | 07945820553 | 2 pcs/box            |
|           | PSR070FL0280              | PSR070FL0280Z        | 07945820544 | PSR070FS0280              | PSR070FS0280Z        | 07945820554 | 2 pcs/box            |
|           | PSR070FL0315              | PSR070FL0315Z        | 07945820545 | PSR070FS0315              | PSR070FS0315Z        | 07945820555 | 2 pcs/box            |
| 71        | PSR071FL0160              | PSR071FL0160Z        | 07945820556 | PSR071FS0160              | PSR071FS0160Z        | 07945820564 | 2 pcs/box            |
|           | PSR071FL0200              | PSR071FL0200Z        | 07945820557 | PSR071FS0200              | PSR071FS0200Z        | 07945820565 | 2 pcs/box            |
|           | PSR071FL0250              | PSR071FL0250Z        | 07945820558 | PSR071FS0250              | PSR071FS0250Z        | 07945820566 | 2 pcs/box            |
|           | PSR071FL0280              | PSR071FL0280Z        | 07945820573 | PSR071FS0280              | PSR071FS0280Z        | 07945820582 | 2 pcs/box            |
|           | PSR071FL0315              | PSR071FL0315Z        | 07945820560 | PSR071FS0315              | PSR071FS0315Z        | 07945820568 | 2 pcs/box            |
|           | PSR071FL0350              | PSR071FL0350Z        | 07945820561 | PSR071FS0350              | PSR071FS0350Z        | 07945820569 | 2 pcs/box            |
|           | PSR071FL0400              | PSR071FL0400Z        | 07945820562 | PSR071FS0400              | PSR071FS0400Z        | 07945820570 | 2 pcs/box            |
| 72        | PSR071FL0450              | PSR071FL0450Z        | 07945820563 | PSR071FS0450              | PSR071FS0450Z        | 07945820571 | 2 pcs/box            |
|           | PSR072FL0250              | PSR072FL0250Z        | 07945820572 | PSR072FS0250              | PSR072FS0250Z        | 07945820581 | 2 pcs/box            |
|           | PSR072FL0280              | PSR072FL0280Z        | 07945820573 | PSR072FS0280              | PSR072FS0280Z        | 07945820582 | 2 pcs/box            |
|           | PSR072FL0315              | PSR072FL0315Z        | 07945820574 | PSR072FS0315              | PSR072FS0315Z        | 07945820583 | 2 pcs/box            |
|           | PSR072FL0350              | PSR072FL0350Z        | 07945820575 | PSR072FS0350              | PSR072FS0350Z        | 07945820584 | 2 pcs/box            |
|           | PSR072FL0400              | PSR072FL0400Z        | 07945820576 | PSR072FS0400              | PSR072FS0400Z        | 07945820585 | 2 pcs/box            |
|           | PSR072FL0450              | PSR072FL0450Z        | 07945820577 | PSR072FS0450              | PSR072FS0450Z        | 07945820586 | 2 pcs/box            |
|           | PSR072FL0500              | PSR072FL0500Z        | 07945820578 | PSR072FS0500              | PSR072FS0500Z        | 07945820587 | 2 pcs/box            |
| 73        | PSR072FL0550              | PSR072FL0550Z        | 07945820579 | PSR072FS0550              | PSR072FS0550Z        | 07945820588 | 2 pcs/box            |
|           | PSR072FL0630              | PSR072FL0630Z        | 07945820580 | PSR072FS0630              | PSR072FS0630Z        | 07945820589 | 2 pcs/box            |
|           | PSR073FL0315              | PSR073FL0315Z        | 07945820590 | PSR073FS0315              | PSR073FS0315Z        | 07945820602 | 2 pcs/box            |
|           | PSR073FL0350              | PSR073FL0350Z        | 07945820591 | PSR073FS0350              | PSR073FS0350Z        | 07945820603 | 2 pcs/box            |
|           | PSR073FL0400              | PSR073FL0400Z        | 07945820592 | PSR073FS0400              | PSR073FS0400Z        | 07945820604 | 2 pcs/box            |
|           | PSR073FL0450              | PSR073FL0450Z        | 07945820593 | PSR073FS0450              | PSR073FS0450Z        | 07945820605 | 2 pcs/box            |
|           | PSR073FL0500              | PSR073FL0500Z        | 07945820594 | PSR073FS0500              | PSR073FS0500Z        | 07945820606 | 2 pcs/box            |
|           | PSR073FL0550              | PSR073FL0550Z        | 07945820595 | PSR073FS0550              | PSR073FS0550Z        | 07945820607 | 2 pcs/box            |
|           | PSR073FL0630              | PSR073FL0630Z        | 07945820596 | PSR073FS0630              | PSR073FS0630Z        | 07945820608 | 2 pcs/box            |
|           | PSR073FL0700              | PSR073FL0700Z        | 07945820597 | PSR073FS0700              | PSR073FS0700Z        | 07945820609 | 2 pcs/box            |

# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

### Dimensions

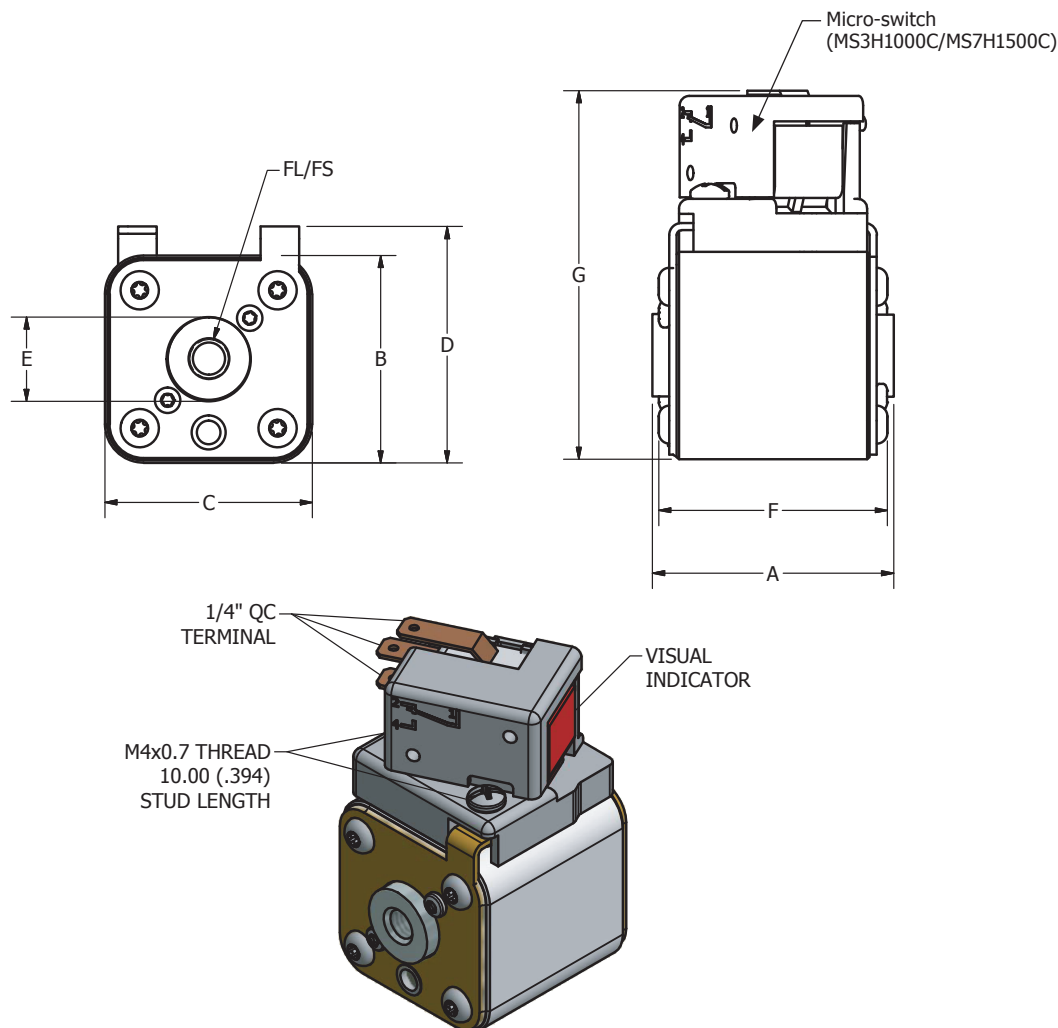


| DIMENSIONS IN MM (IN) |             |             |             |             |             |             |              |                  |                  |                    |
|-----------------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|------------------|------------------|--------------------|
| CASE SIZE             | A           | B           | C           | D           | E           | F           | G            | FL METRIC THREAD | FS INCHES THREAD | RECOMMENDED TORQUE |
| 30                    | 50.0 (1.97) | 43.0 (1.69) | 43.0 (1.69) | 49.0 (1.93) | 17.0 (0.67) | 47.4 (1.86) | 76.4 (3.01)  | M8 x 1.25        | 5/16"–18 UNC 2B  | 13–20 Nm           |
| 31                    | 50.0 (1.97) | 51.5 (2.03) | 51.5 (2.03) | 57.5 (2.26) | 20.0 (0.8)  | 48.2 (1.90) | 84.9 (3.34)  | M8 x 1.25        | 5/16"–18 UNC 2B  | 13–20 Nm           |
| 32                    | 51.0 (2.01) | 60.0 (2.36) | 60.0 (2.36) | 66.0 (2.60) | 23.0 (0.91) | 48.8 (1.92) | 93.4 (3.68)  | M10 x 1.5        | 3/8"–16 UNC 2B   | 26–35 Nm           |
| 33                    | 51.0 (2.01) | 73.5 (2.89) | 73.5 (2.89) | 79.5 (3.13) | 30.0 (1.18) | 49.2 (1.94) | 106.9 (4.21) | M12 x 1.75       | 1/2"–13 UNC 2B   | 45–55 Nm           |
| 70                    | 74.0 (2.91) | 43.0 (1.69) | 43.0 (1.69) | 49.0 (1.93) | 17.0 (0.67) | 71.4 (2.81) | 76.4 (3.01)  | M8 x 1.25        | 5/16"–18 UNC 2B  | 13–20 Nm           |
| 71                    | 74.0 (2.91) | 51.5 (2.03) | 51.5 (2.03) | 57.5 (2.26) | 20.0 (0.79) | 72.2 (2.84) | 84.9 (3.34)  | M8 x 1.25        | 5/16"–18 UNC 2B  | 13–20 Nm           |
| 72                    | 75.0 (2.95) | 60.0 (2.36) | 60.0 (2.36) | 66.0 (2.60) | 23.0 (0.91) | 72.8 (2.87) | 93.4 (3.68)  | M10 x 1.5        | 3/8"–16 UNC 2B   | 26–35 Nm           |
| 73                    | 75.0 (2.95) | 73.5 (2.89) | 73.5 (2.89) | 79.5 (3.13) | 30.0 (1.18) | 73.2 (2.88) | 106.9 (4.21) | M12 x 1.75       | 1/2"–13 UNC 2B   | 45–55 Nm           |

# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

### Time Current Curve (30 Case Size)

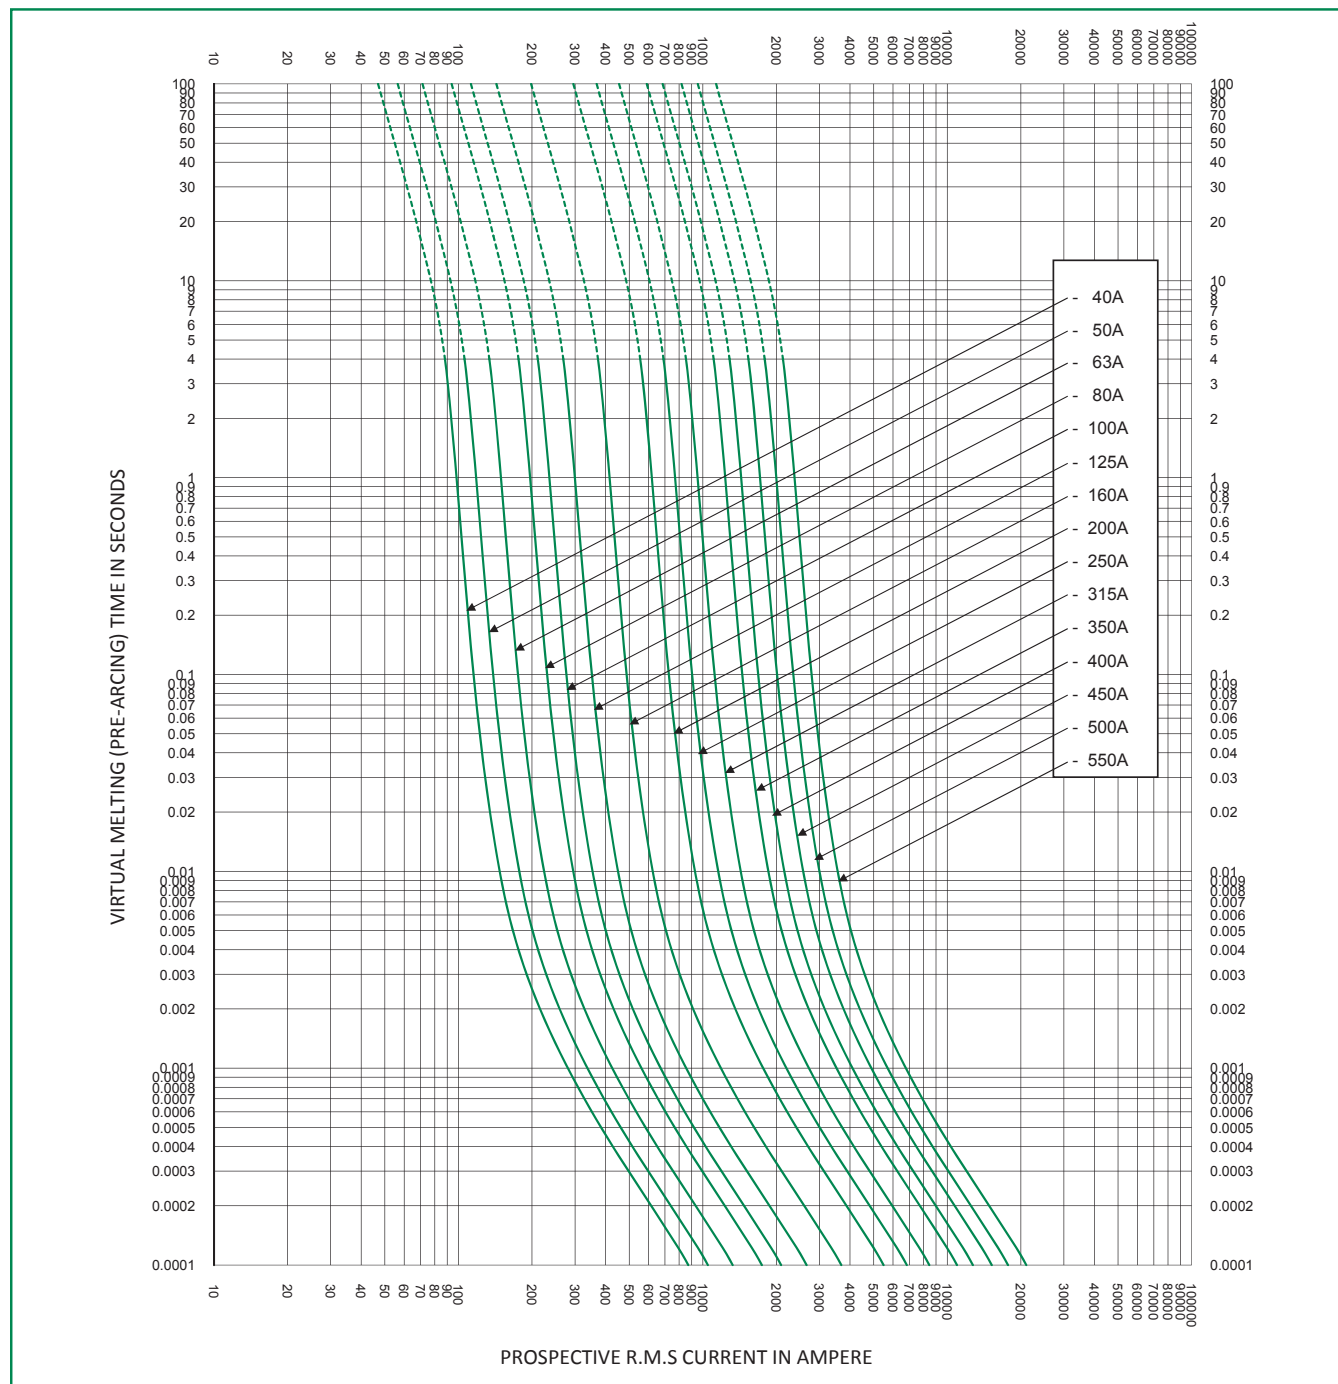


\* Dc minimum breaking capacity = 9 x Rated Current of Fuse



# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

### Time Current Curve (31 Case Size)

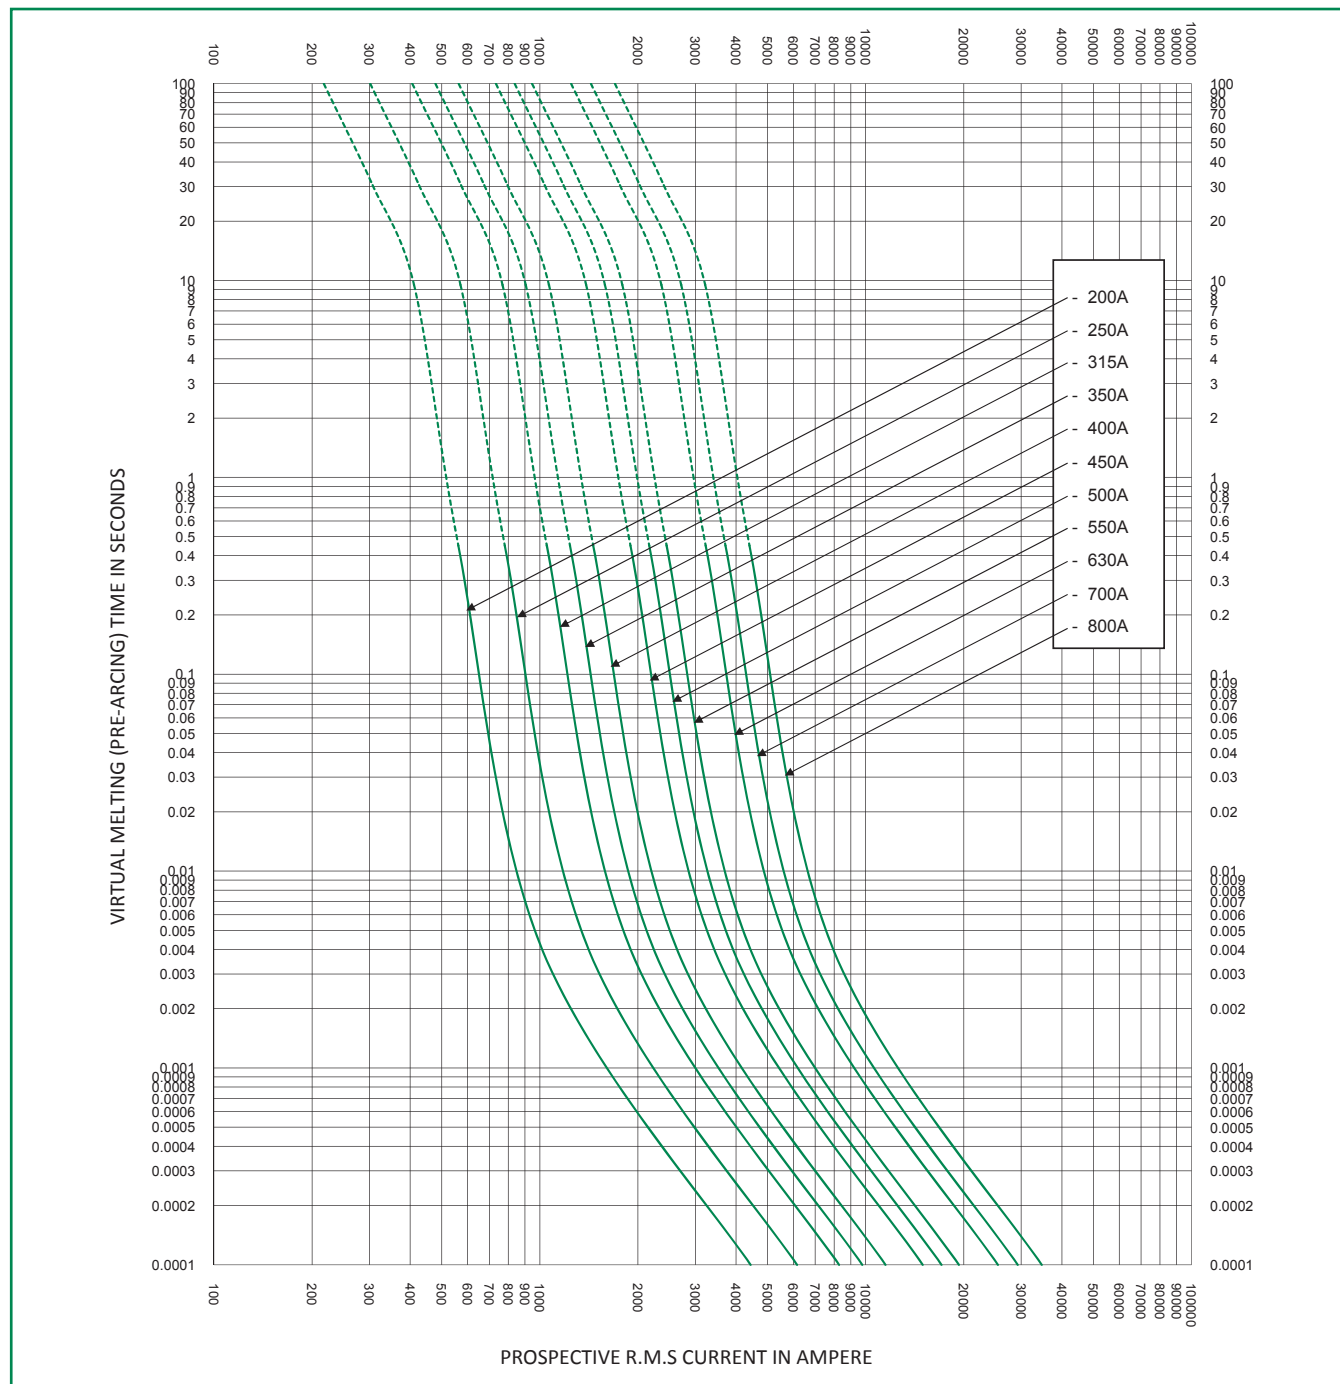


\* Dc minimum breaking capacity = 9 x Rated Current of Fuse



# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

### Time Current Curve (32 Case Size)

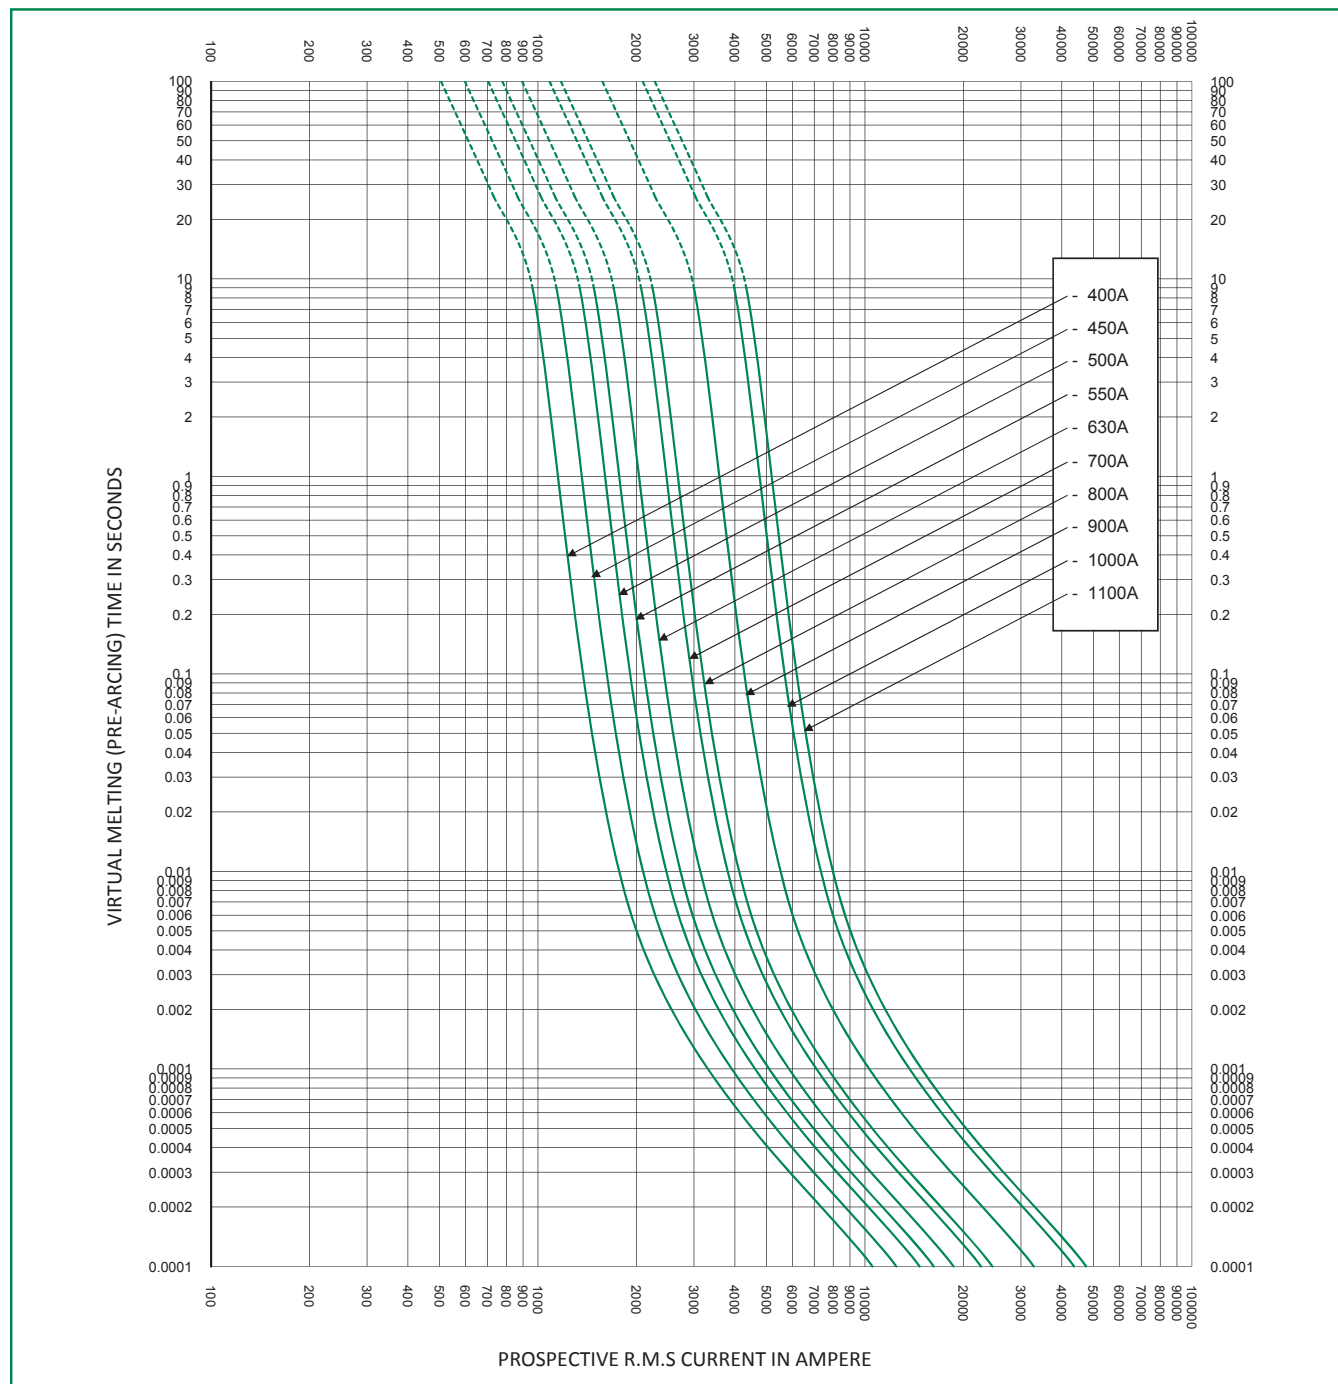


\* Dc minimum breaking capacity = 9 x Rated Current of Fuse

# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

### Time Current Curve (33 Case Size)

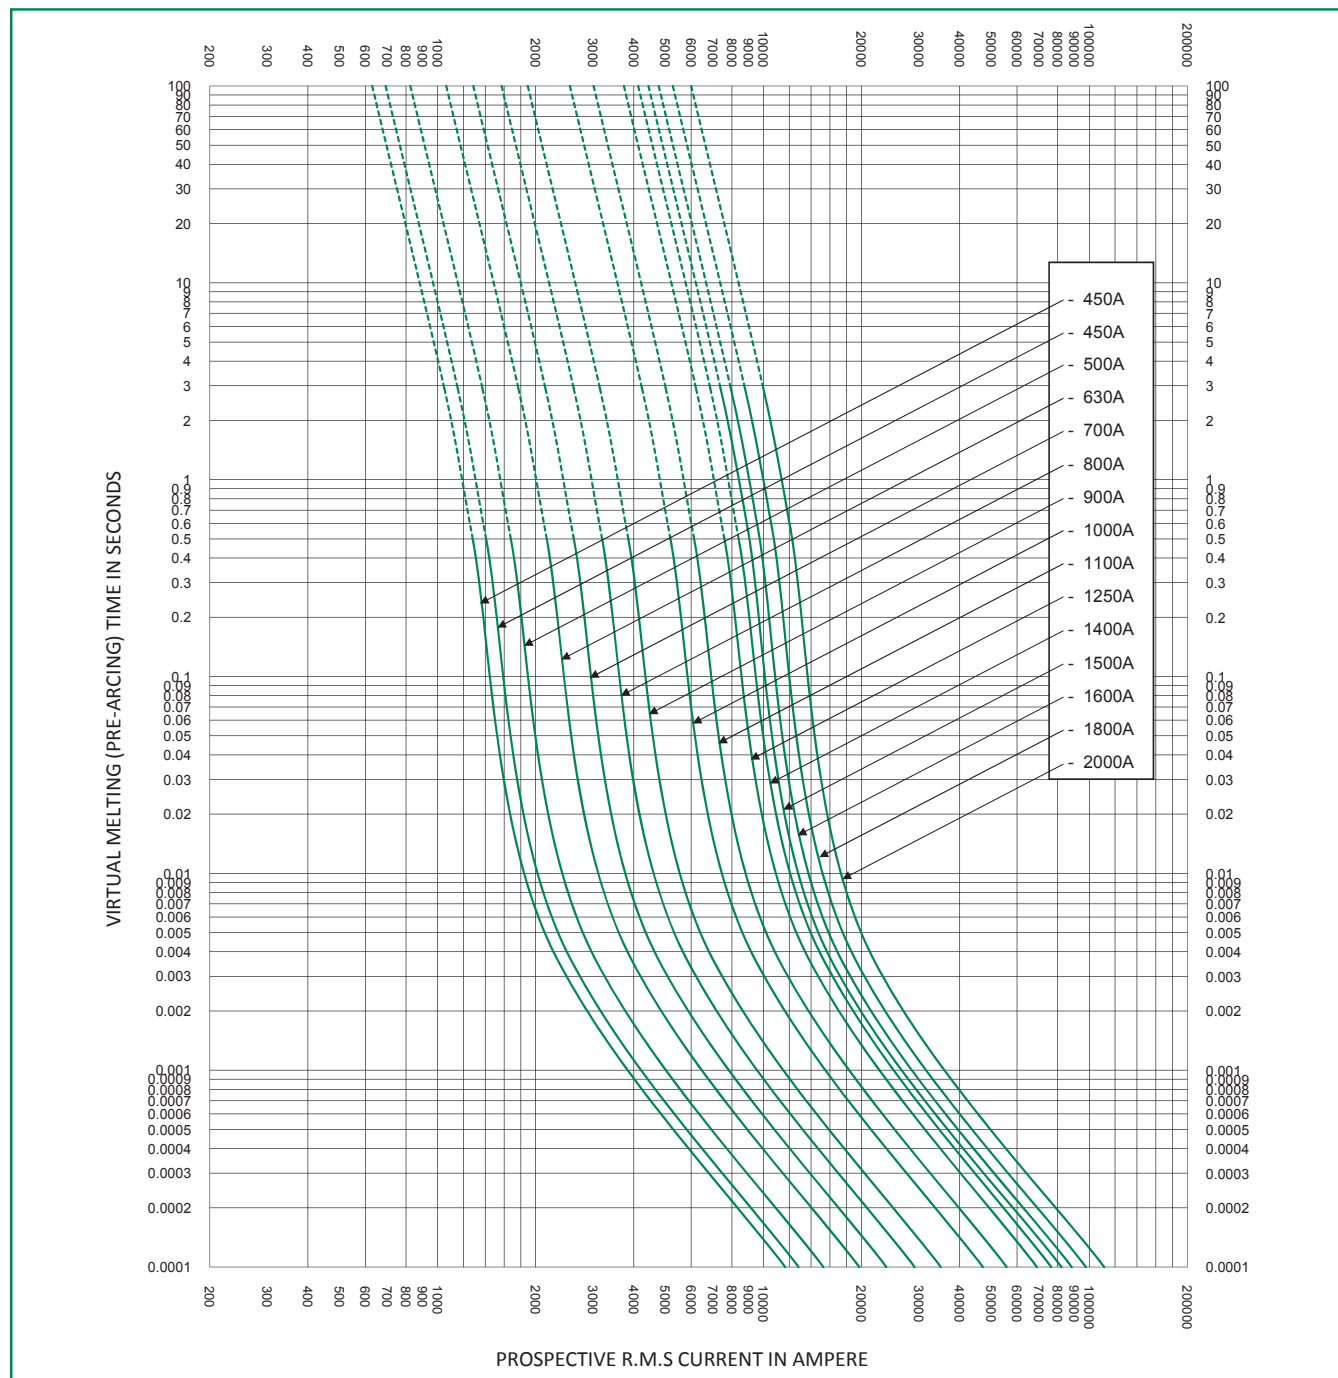


\* Dc minimum breaking capacity = 9 x Rated Current of Fuse

# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

### Time Current Curve (70 Case Size)

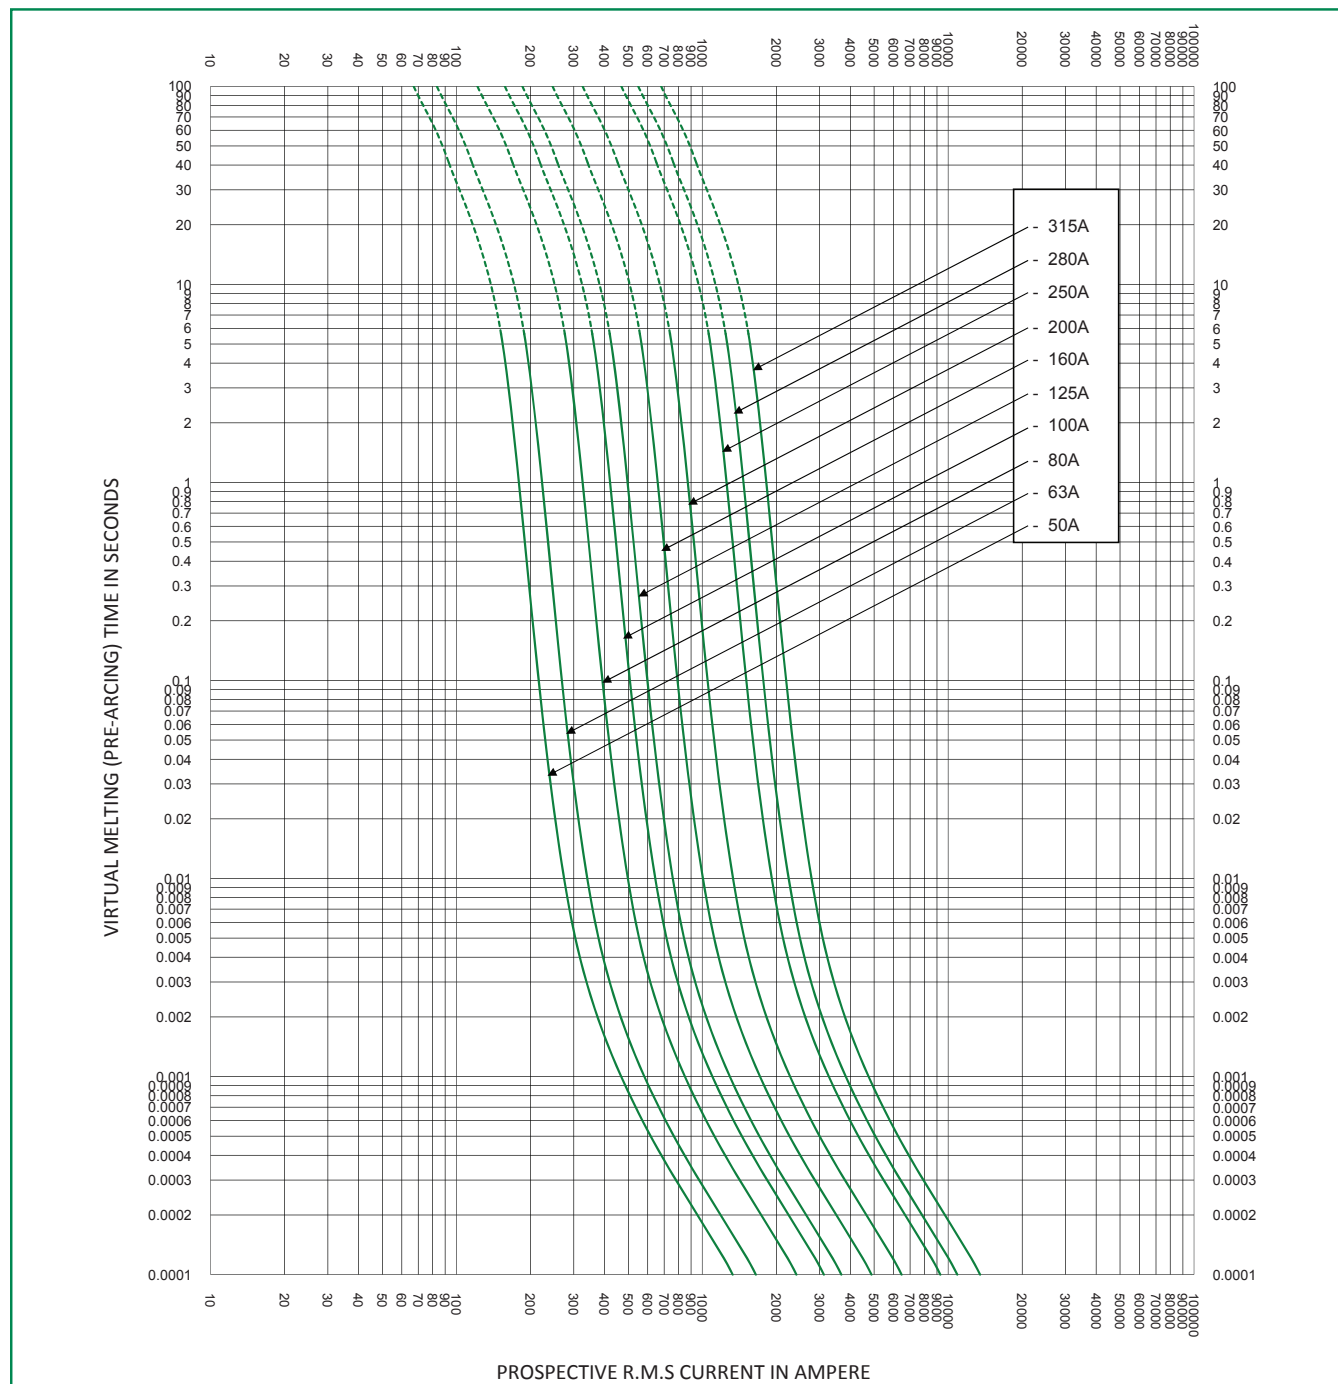


\* Dc minimum breaking capacity = 9 x Rated Current of Fuse

# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

### Time Current Curve (71 Case Size)

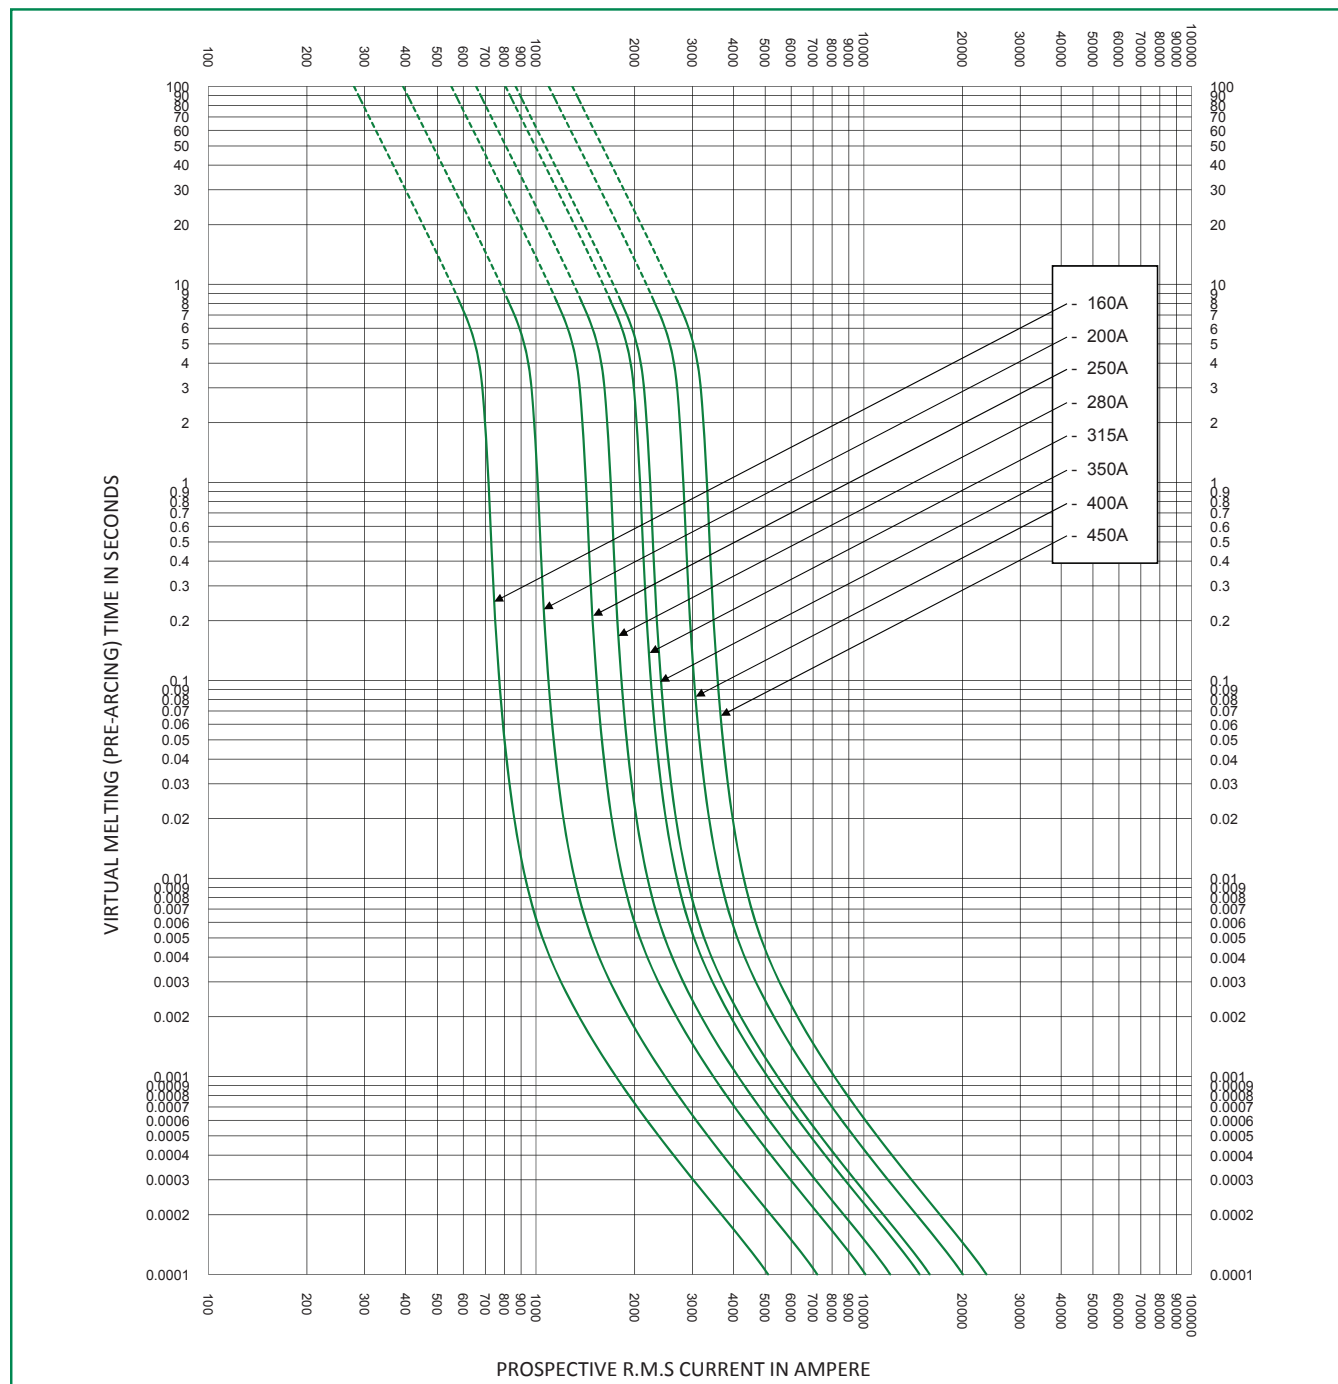


\* Dc minimum breaking capacity = 9 x Rated Current of Fuse

# POWR-SPEED® Fuse

## PSR SERIES HIGH-SPEED SQUARE BODY

### Time Current Curve (72 Case Size)

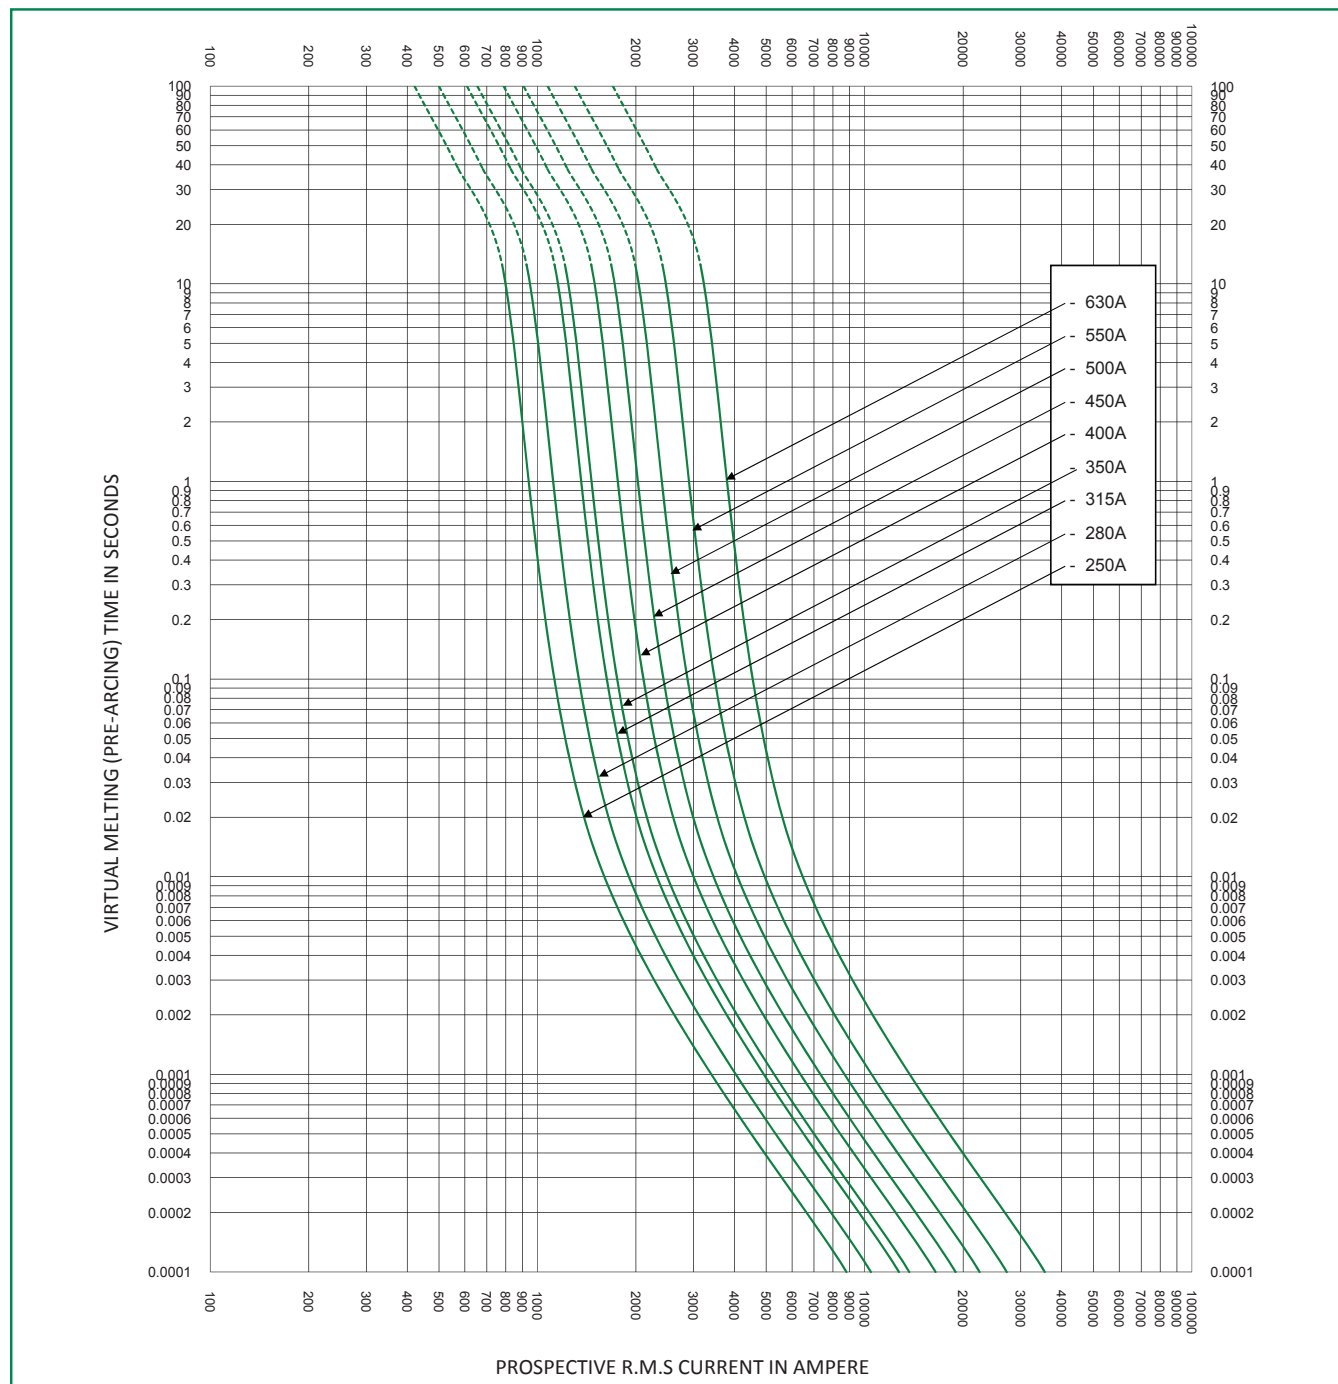


\* Dc minimum breaking capacity = 9 x Rated Current of Fuse

# POWR-SPEED® Fuse


## PSR SERIES HIGH-SPEED SQUARE BODY

### Time Current Curve (73 Case Size)

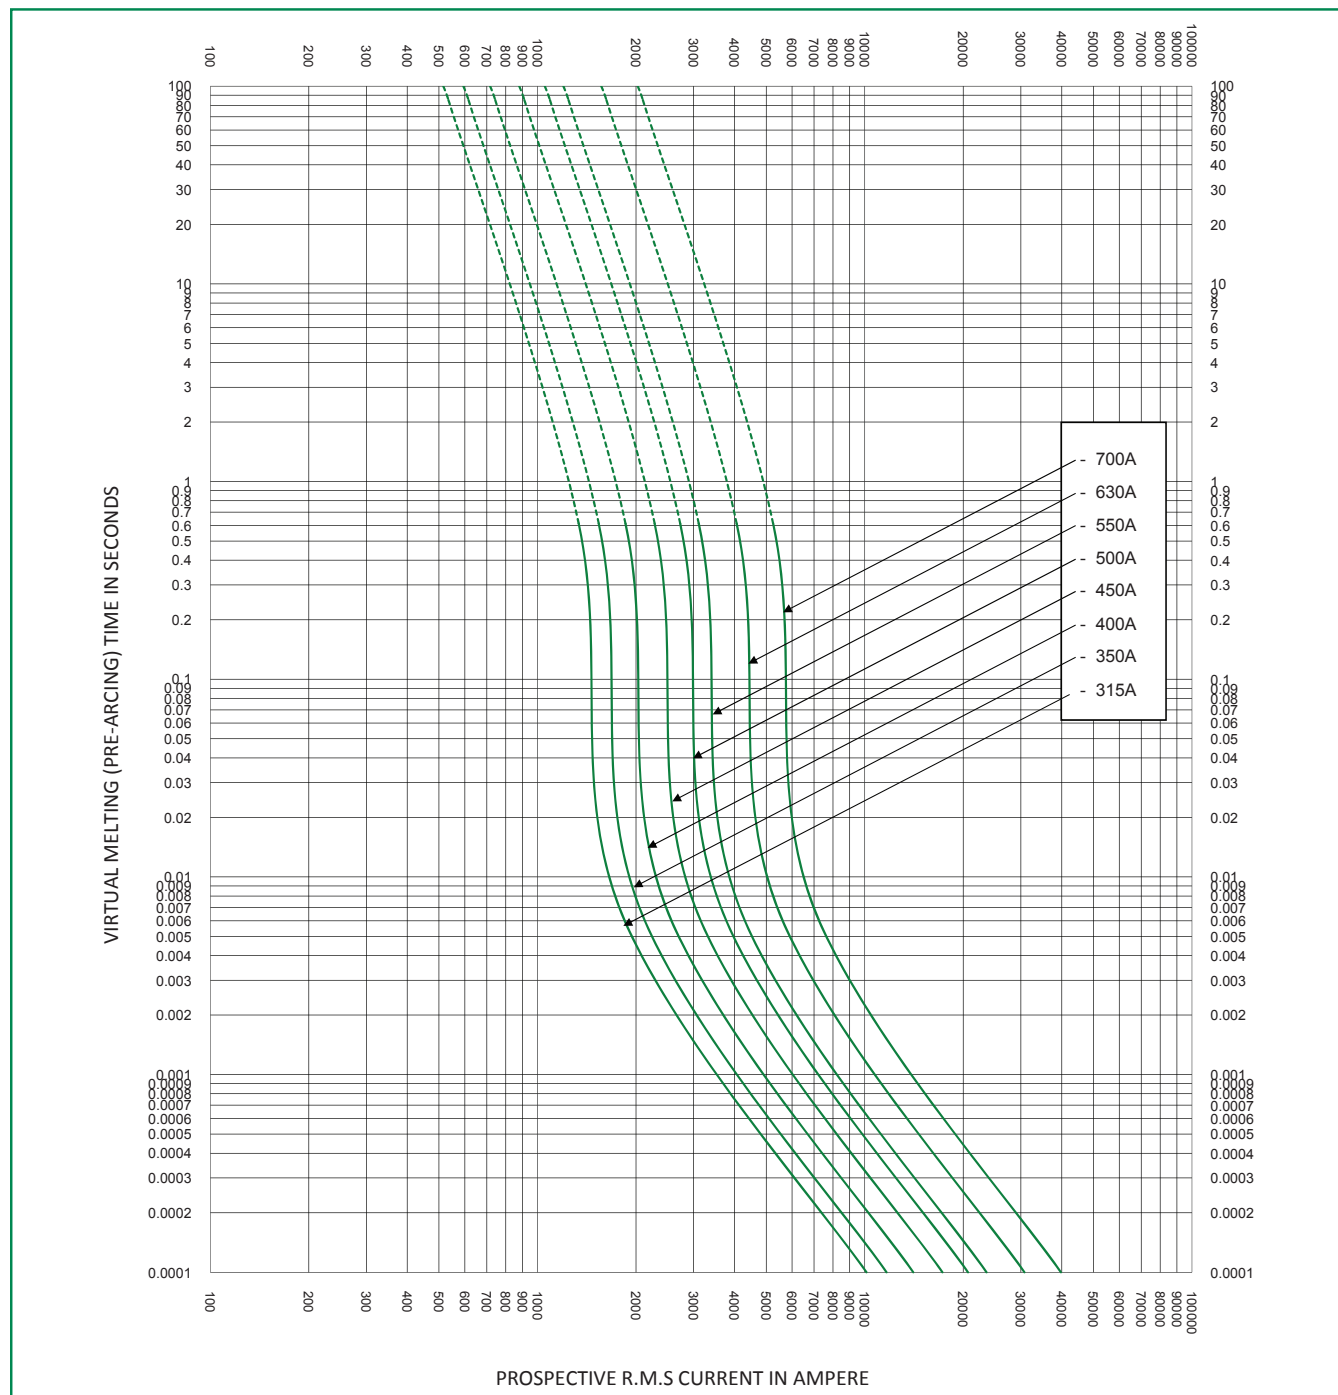


\* Dc minimum breaking capacity = 9 x Rated Current of Fuse

### Peak Let-Thru Curve (30 Case Size)

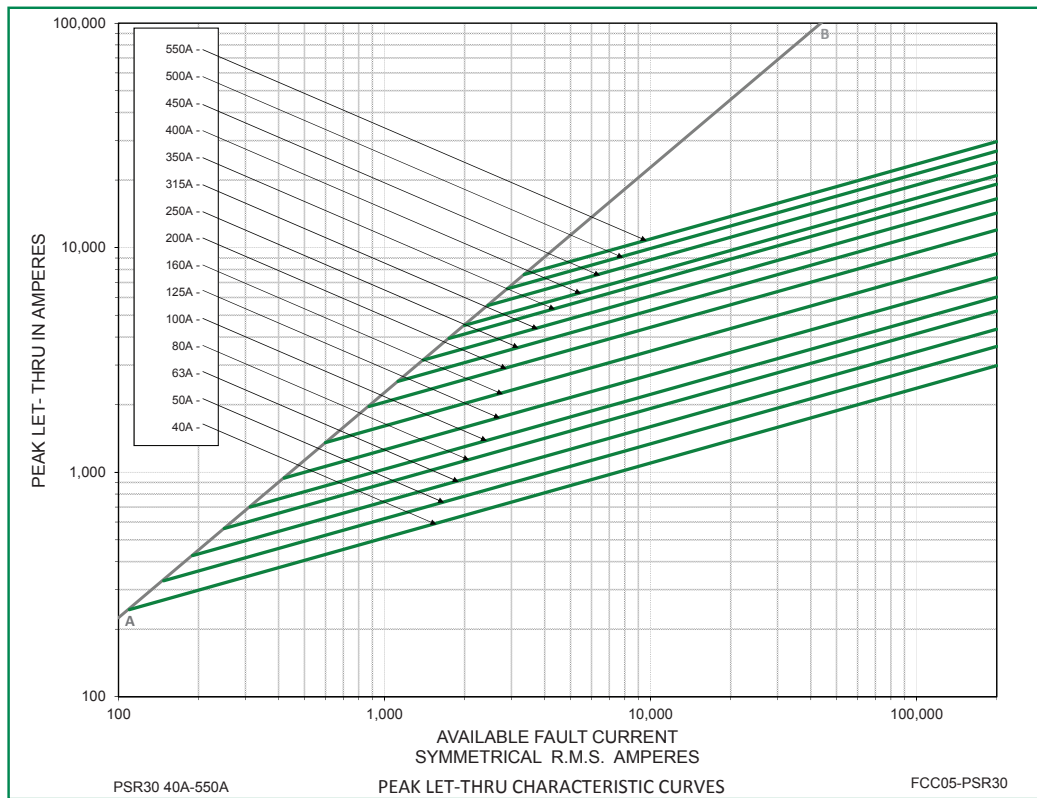


### Peak Let-Thru Curve (31 Case Size)

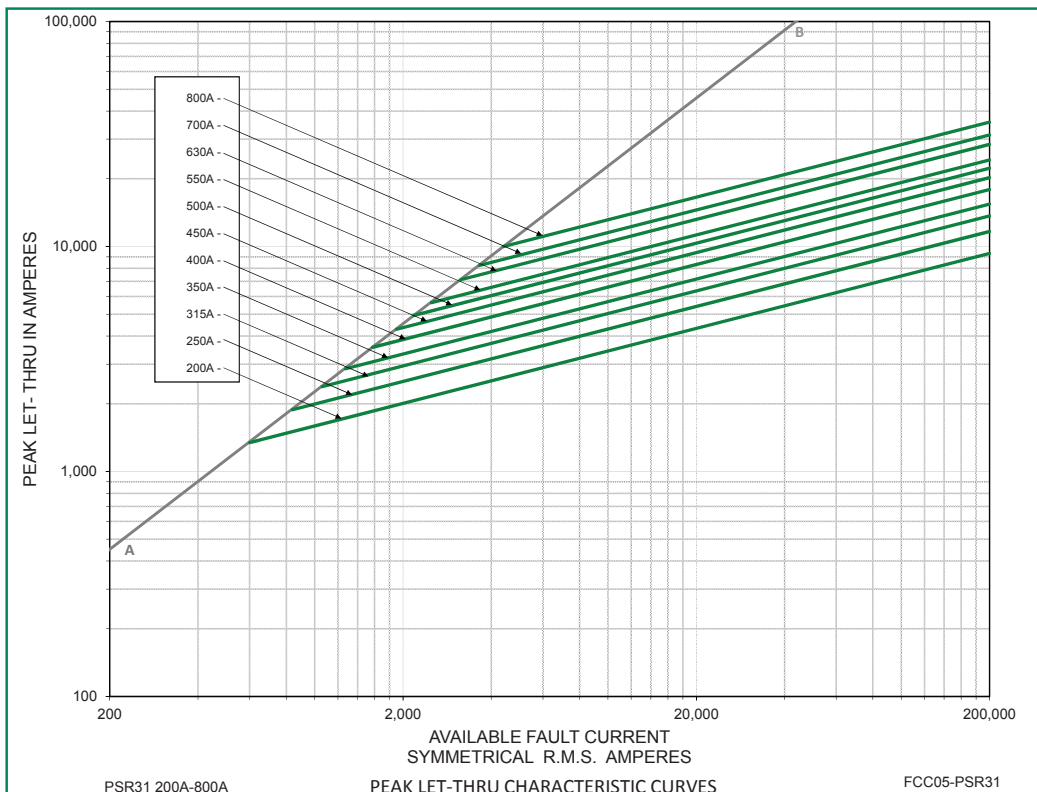





### Peak Let-Thru Curve (32 Case Size)

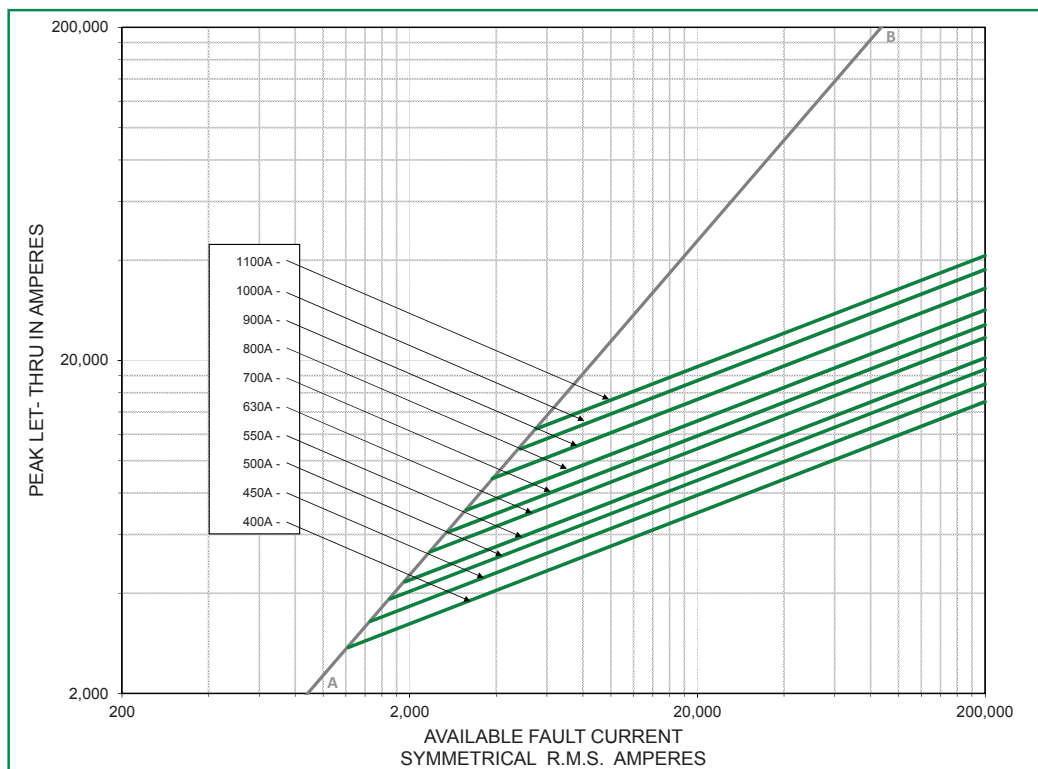


### Peak Let-Thru Curve (33 Case Size)

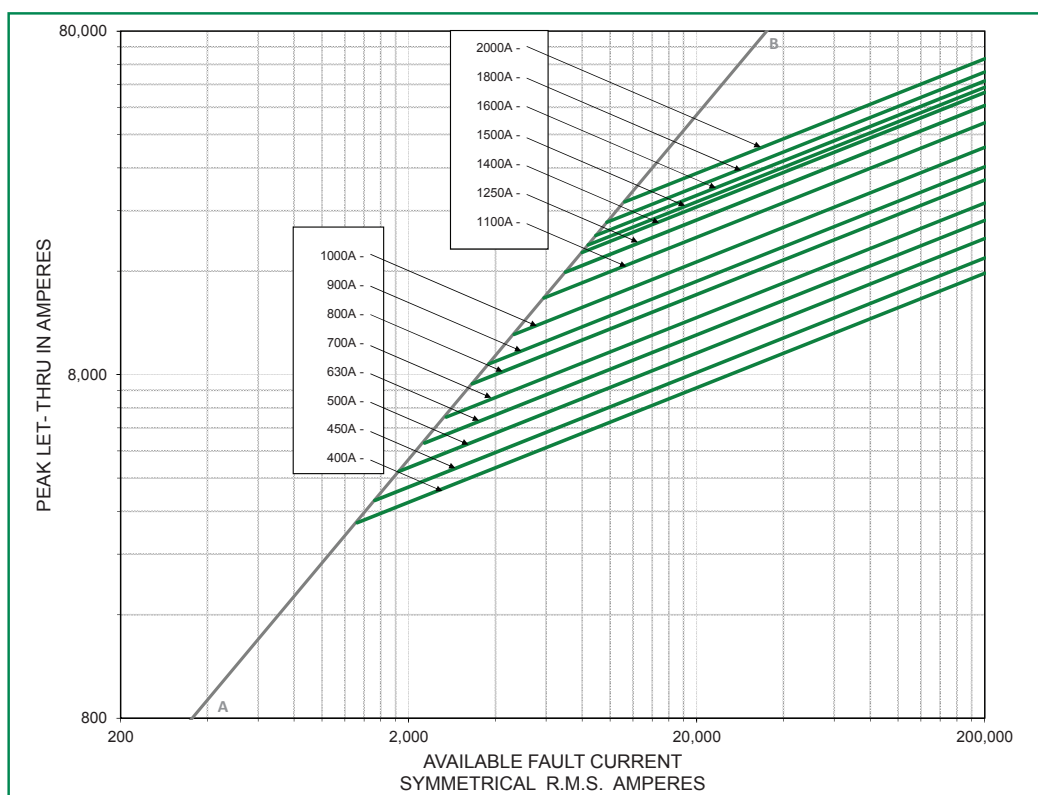


### Peak Let-Thru Curve (70 Case Size)

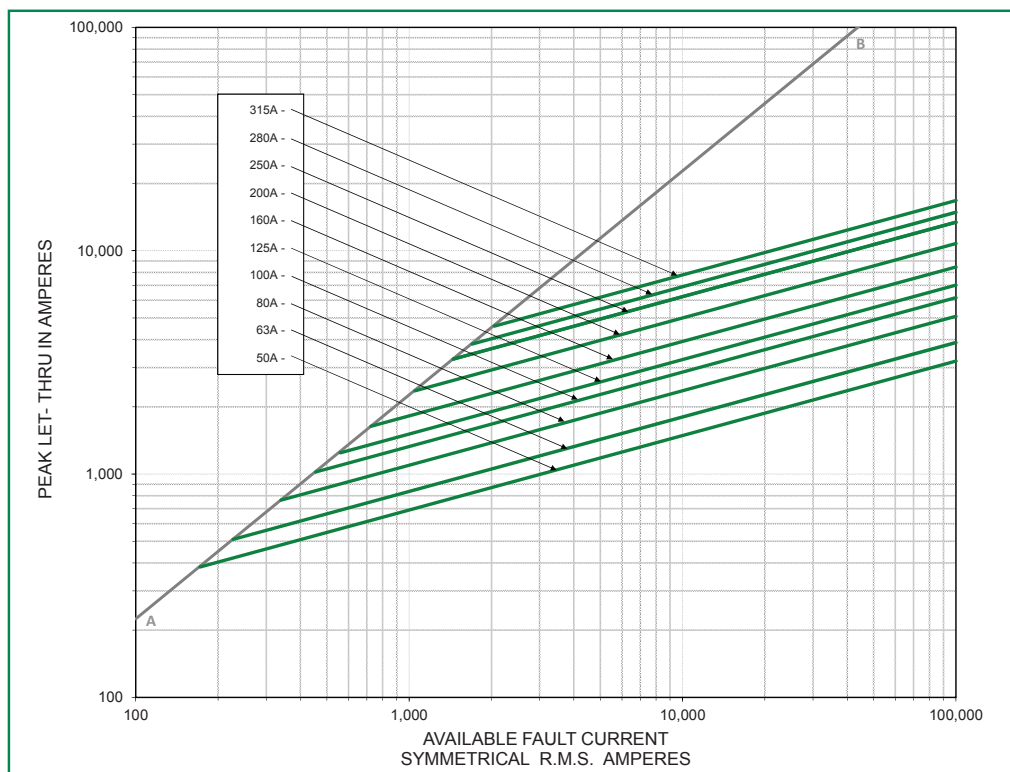


### Peak Let-Thru Curve (71 Case Size)

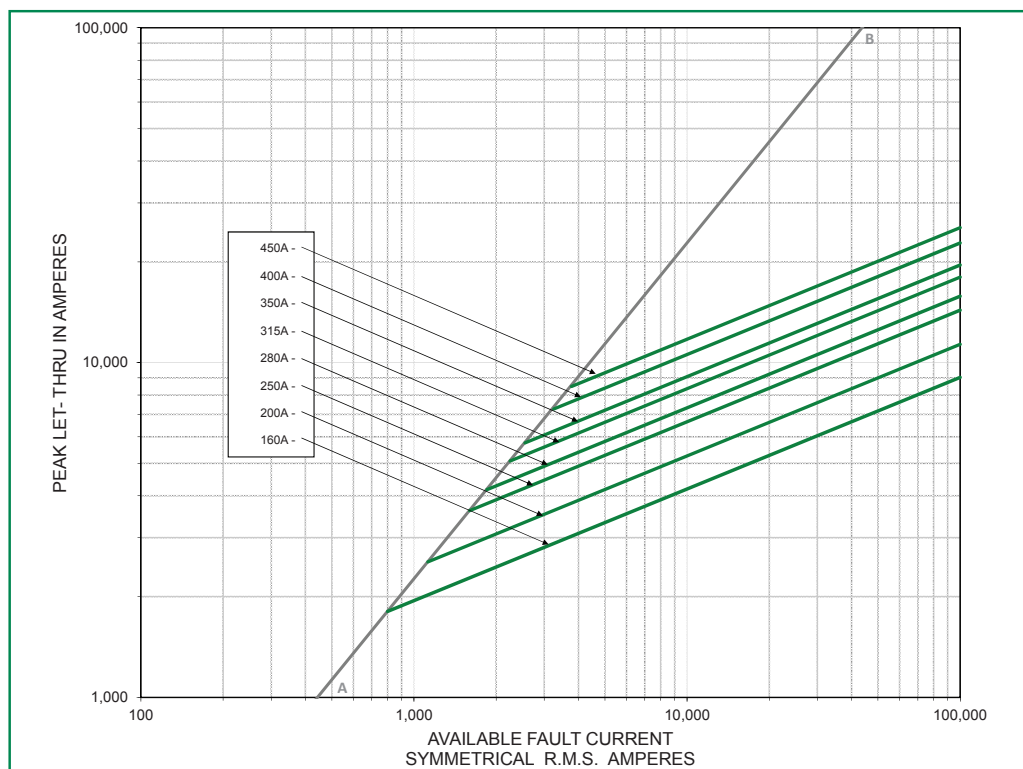


### Peak Let-Thru Curve (72 Case Size)

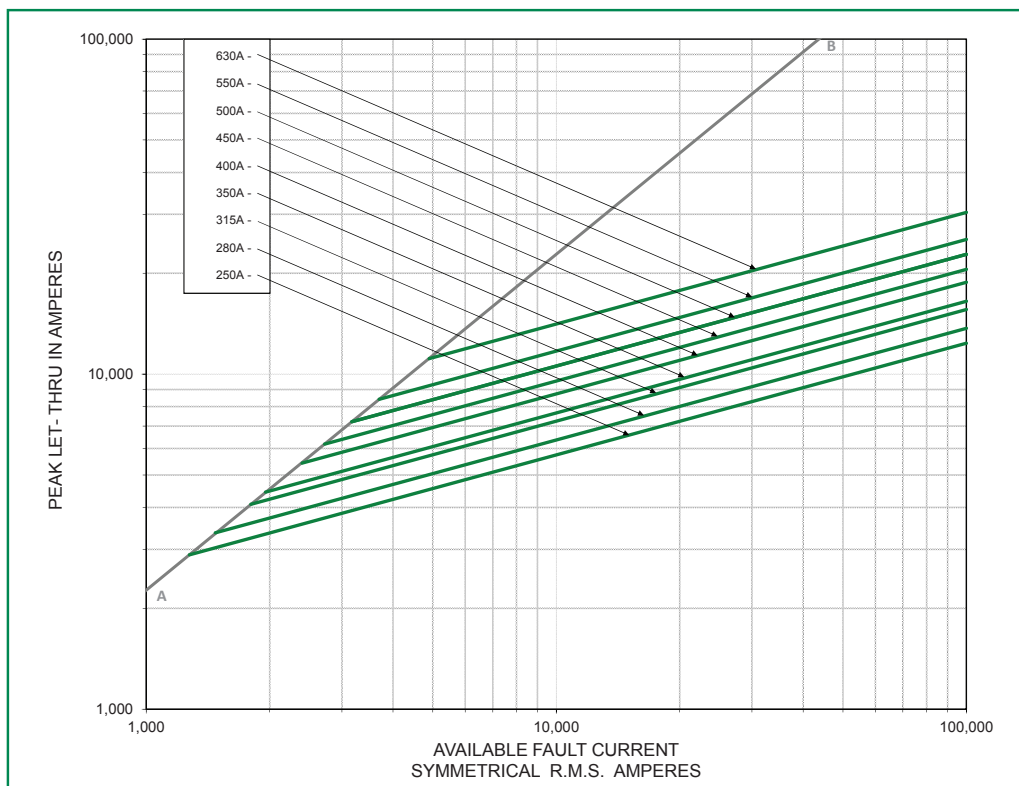


### Peak Let-Thru Curve (73 Case Size)

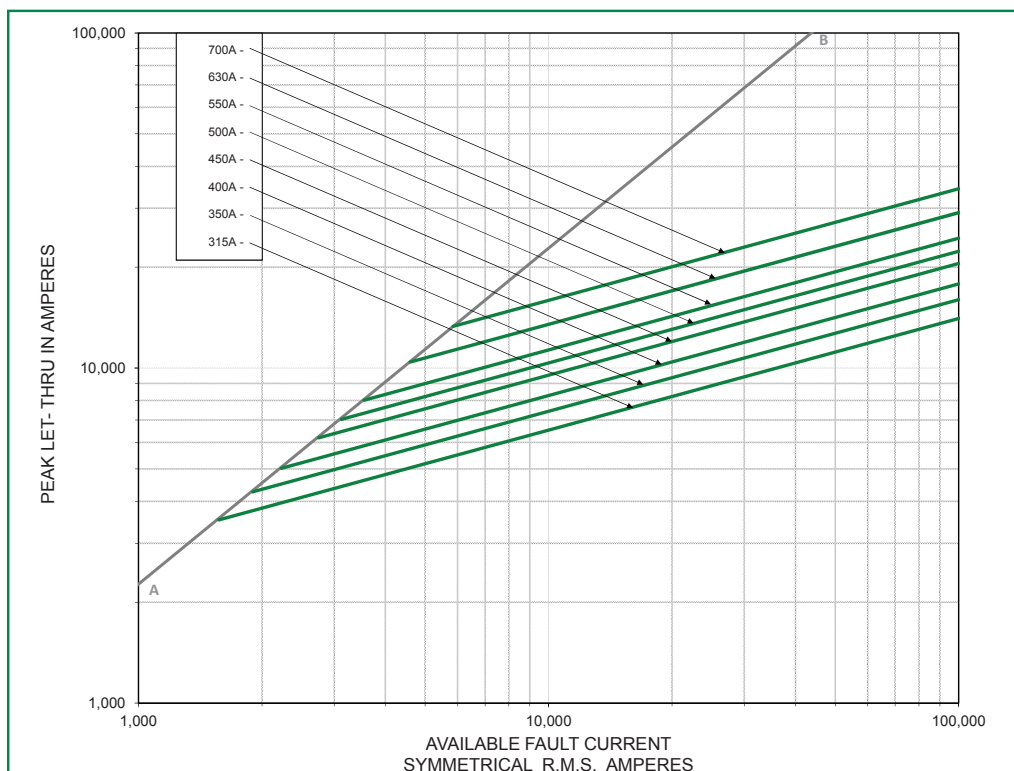


**Total Clearing  $I^2t$  Correction Factor Curve**  
Case Size (30, 31, 32 and 33)

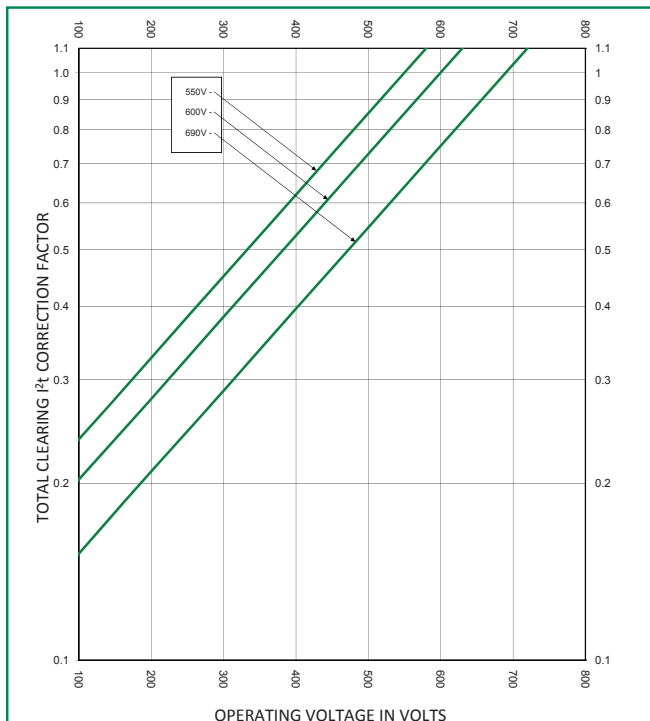


**Total Clearing  $I^2t$  Correction Factor Curve**  
Case Size (70, 71, 72, and 73)

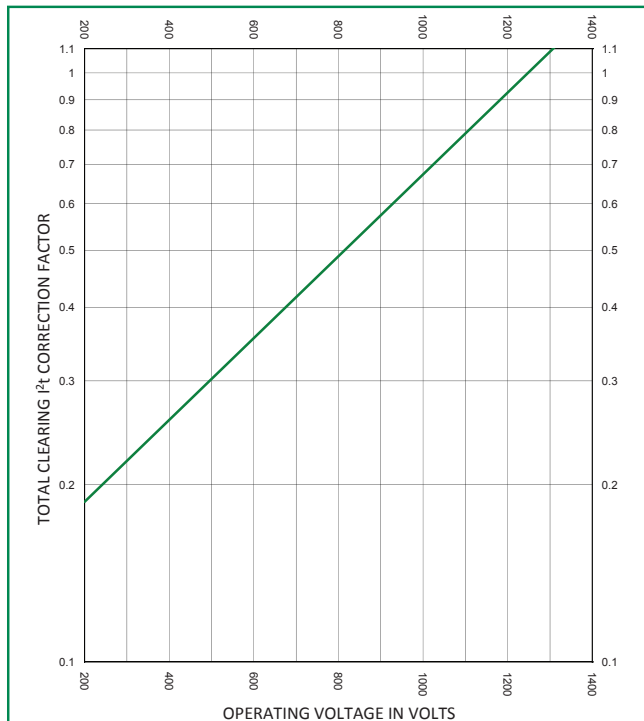

**Peak Arc Voltage Curve**  
Case Size (30, 31, 32 and 33)

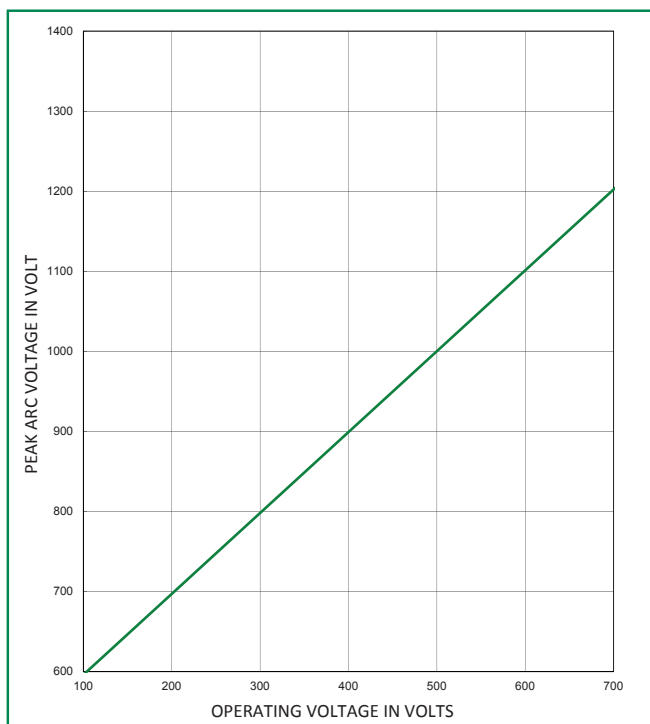


**Peak Arc Voltage Curve**  
Case Size (70, 71, 72, and 73)

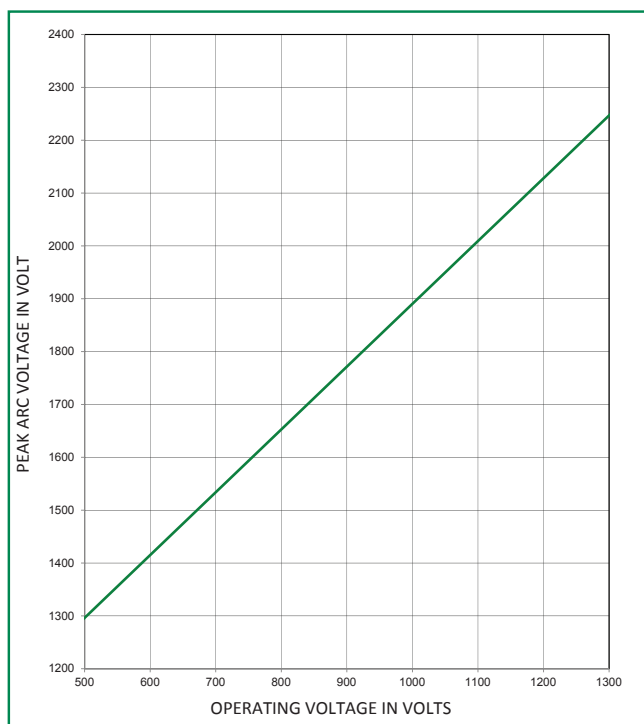


Temperature Derating Curve

(temperature of air immediately surrounding fuse)

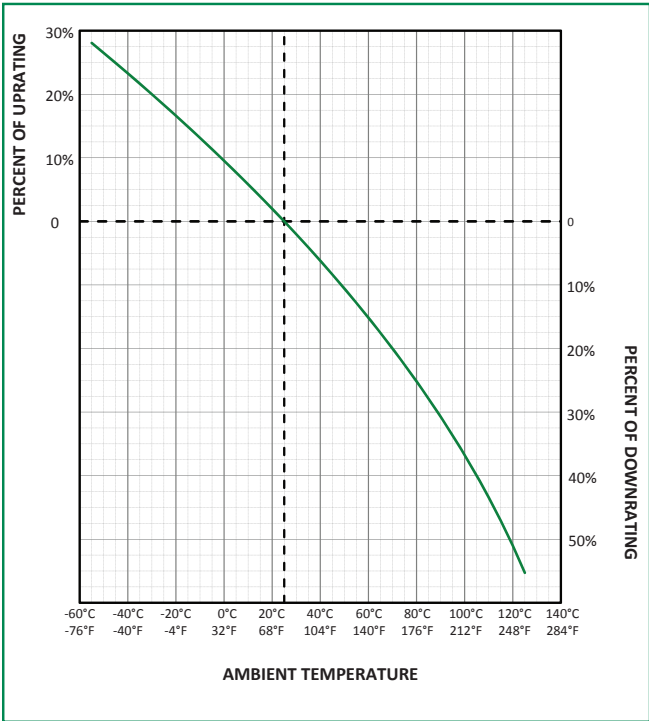

Watts Loss Correction Factor Curve

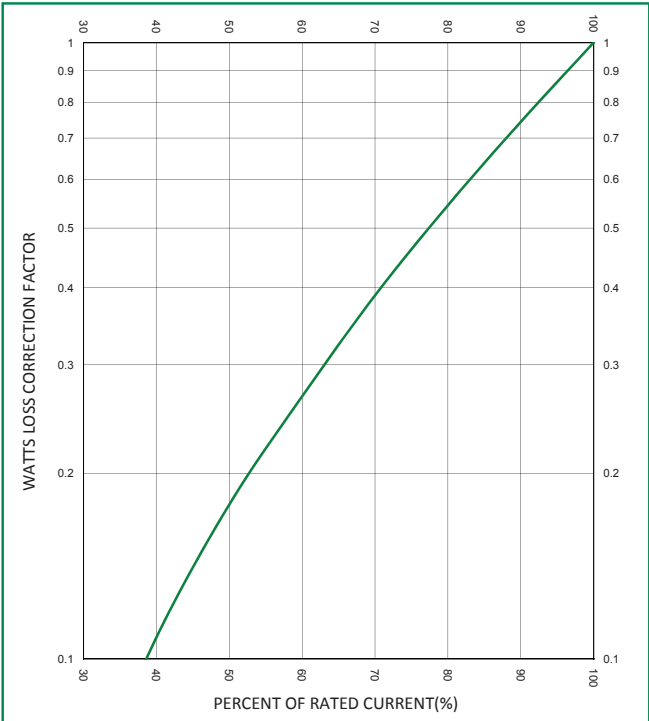

# POWR-SPEED® Fuse


## PSR SERIES HIGH-SPEED SQUARE BODY

### Microswitch

[Dimensions in millimeters]


#### MS3H1000C

Document Number: OL-MS3H1000C Rev. B

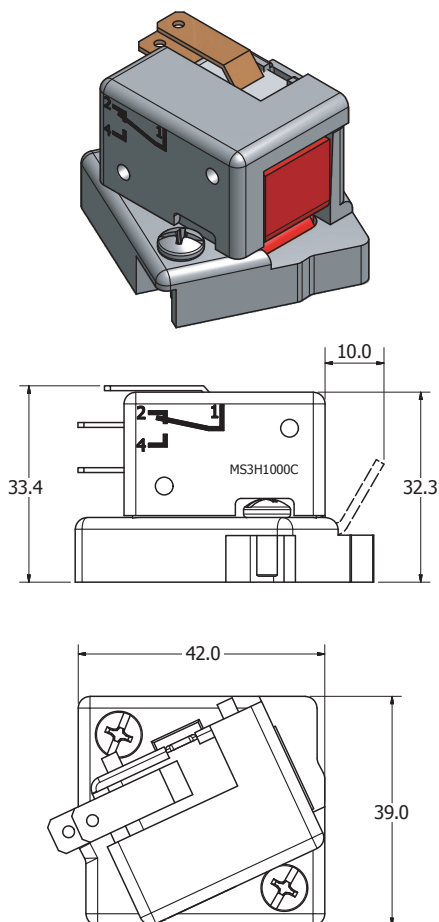

#### MS7H1500C

Document Number: OL-MS7H1500C Rev. B

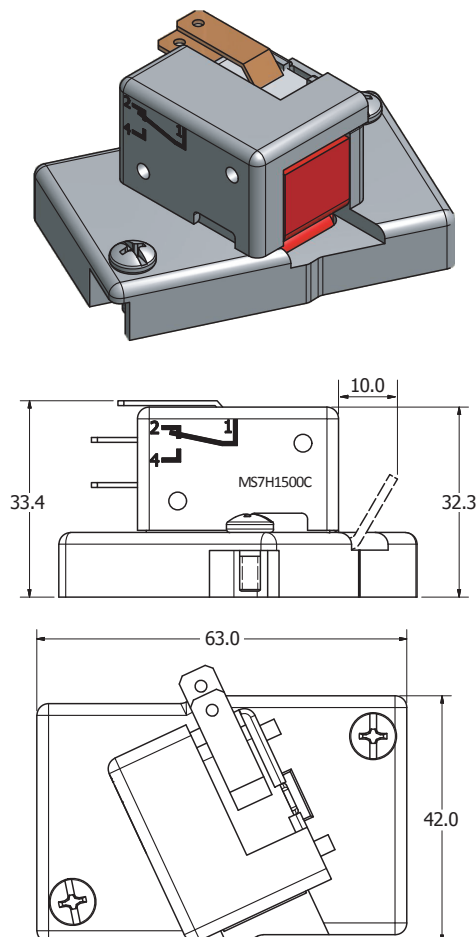

### Electrical Characteristics

| CATALOG<br>NUMBER/<br>ORDERING<br>NUMBER | INDICATING<br>STYLE | INSULATION<br>VOLTAGE<br>RATING<br>(VAC) | FUSE<br>CASE<br>SIZE | POSITIVE<br>OPERATING<br>MIN VOLTAGE /<br>MIN CURRENT | INTERRUPTING RATING |                       |       |       |                                  |       | OPERATING<br>TEMP. | RELATIVE<br>HUMIDITY | PACK<br>QUANTITY |           |
|------------------------------------------|---------------------|------------------------------------------|----------------------|-------------------------------------------------------|---------------------|-----------------------|-------|-------|----------------------------------|-------|--------------------|----------------------|------------------|-----------|
|                                          |                     |                                          |                      |                                                       | CURRENT             | NON-INDUCTIVE<br>LOAD |       |       | INDUCTIVE LOAD<br>(DC L/R=25 ms) |       |                    |                      |                  |           |
|                                          |                     |                                          |                      |                                                       |                     | 30 V                  | 110 V | 250 V | 30 V                             | 110 V |                    |                      |                  | 250 V     |
| MS3H1000C*                               | Standard<br>NO-NC   | 1000                                     | 30, 31,<br>32, 33    | 4 V / 1mA                                             | ac (50/60 Hz)       | 5 A                   | 5 A   | 5 A   | 5 A                              | 5 A   | 4 A                | -60 °C to<br>+125 °C | 95 %             | 3 pcs/bag |
|                                          |                     |                                          |                      |                                                       | dc                  | 5 A                   | 0.6 A | 0.3 A | 3 A                              | 0.2 A | 0.1 A              |                      |                  |           |
| MS7H1500C*                               | Standard<br>NO-NC   | 1500                                     | 70, 71,<br>72, 73    |                                                       | ac (50/60 Hz)       | 5 A                   | 5 A   | 5 A   | 5 A                              | 5 A   | 4 A                | -60 °C to<br>+125 °C | 95 %             | 3 pcs/bag |
|                                          |                     |                                          |                      |                                                       | dc                  | 5 A                   | 0.6 A | 0.3 A | 3 A                              | 0.2 A | 0.1 A              |                      |                  |           |

\* Contains internal microswitch (Part Number: U83161.8), listed under UL File: E42016.

**Disclaimer Notice** – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/product-disclaimer](http://www.littelfuse.com/product-disclaimer).

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9