

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F1	ECR-14-002924	28FEB2014	GK	HMR

REPLACED BY OCEAN STYLE APPLICATOR PART
NUMBER 2151182-2

FOR REPLACEMENT PARTS FOR APPLICATOR 1426034
REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED)
WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE
SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR
1426034

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	GOPALAKRISHNA HV		 TE Connectivity			
		CHK	RAGHAVENDRA					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	RAGHAVENDRA			
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		NAME				
				SIDE FEED HD-I APPLICATOR				
				PRODUCT SPEC				
				APPLICATION SPEC				
MATERIAL		FINISH		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
					A3		©- 1426034	
CUSTOMER DRAWING				SCALE	SHEET 1 OF 2	REV F1		

THIS DRAWING IS A CONTROLLED DOCUMENT



LAYOUT
L1426034

SET UP GAGE
458637-3


THIS DRAWING IS UNPUBLISHED.
BY AMP INCORPORATED. ALL RIGHTS RESERVED.
© COPYRIGHT 2000

DRAWING MADE IN THIRD ANGLE PROJECTION

PART NUMBER	REV	FIRST USED	TERMINATOR	FEED TYPE	DESCRIPTION
1426034-1	F	122500-1	LEADMAKER	MECH POST FEED	CUTS CARRIER
1426034-2	F	565435-5	BENCH K & G	MECH PRE FEED	CUTS CARRIER
1426034-6	F	122500-1	LEADMAKER	MECH POST FEED	CONTINUOUS CARRIER
7-1426034-1	F	122500-1	LEADMAKER	MECH POST FEED	-1 AND SPARE PARTS
7-1426034-2	F	565435-5	BENCH K & G	MECH PRE FEED	-2 AND SPARE PARTS
7-1426034-6	F	122500-1	LEADMAKER	MECH POST FEED	-6 AND SPARE PARTS
7-1426034-7	A	-	-	-	SPARE PARTS KIT

CRIMP DATA (AMP TERMINAL)				
TERMINAL NAME: RECEPTACLE, POS-LOK				
CRIMP	SIZE	TYPE	RANGE	
WIRE	2.29 [1.090 IN]	F	0.50 - 1.50mm ²	
INSUL	3.30 [1.130 IN]	F	2.29-2.50 [1.090-.098 IN]	
WIRE STRIP LENGTH			APPL INSTRUCTION	
5.79-6.60 [1.228-.260 IN]			408-8322	
TERMINAL	114-3118	-		FEED
APPL SPEC	-	-		26.42 [1.040 IN]
TERMINALS APPLIED				
160759	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
WIRE SIZE		CRIMP HEIGHT		PIN PN & LENGTH [IN]
mm ² AWG				
16 AWG or 1.50mm ²		1.65 ±0.05 [1.065 ±.002 IN]		354779-7 [1.3025]
1.00mm ²		1.60 ±0.05 [1.063 ±.002 IN]		1-354779-1 [1.3045]
18 AWG or 0.75mm ²		1.50 ±0.05 [1.059 ±.002 IN]		1-354779-8 [1.3080]
20 AWG or 0.50mm ²		1.45 ±0.05 [1.057 ±.002 IN]		2-354779-4 [1.3110]
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-
-		-		-



1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. GUIDE TERMINAL OFF INSULATION BARREL.

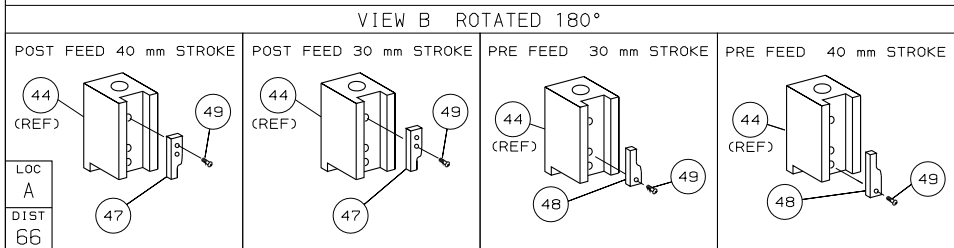

AMP 1756 REV 3-92 24-AUG-06 11:25:57 b8420

1426034 1426034

/nd/mbaum/middleton

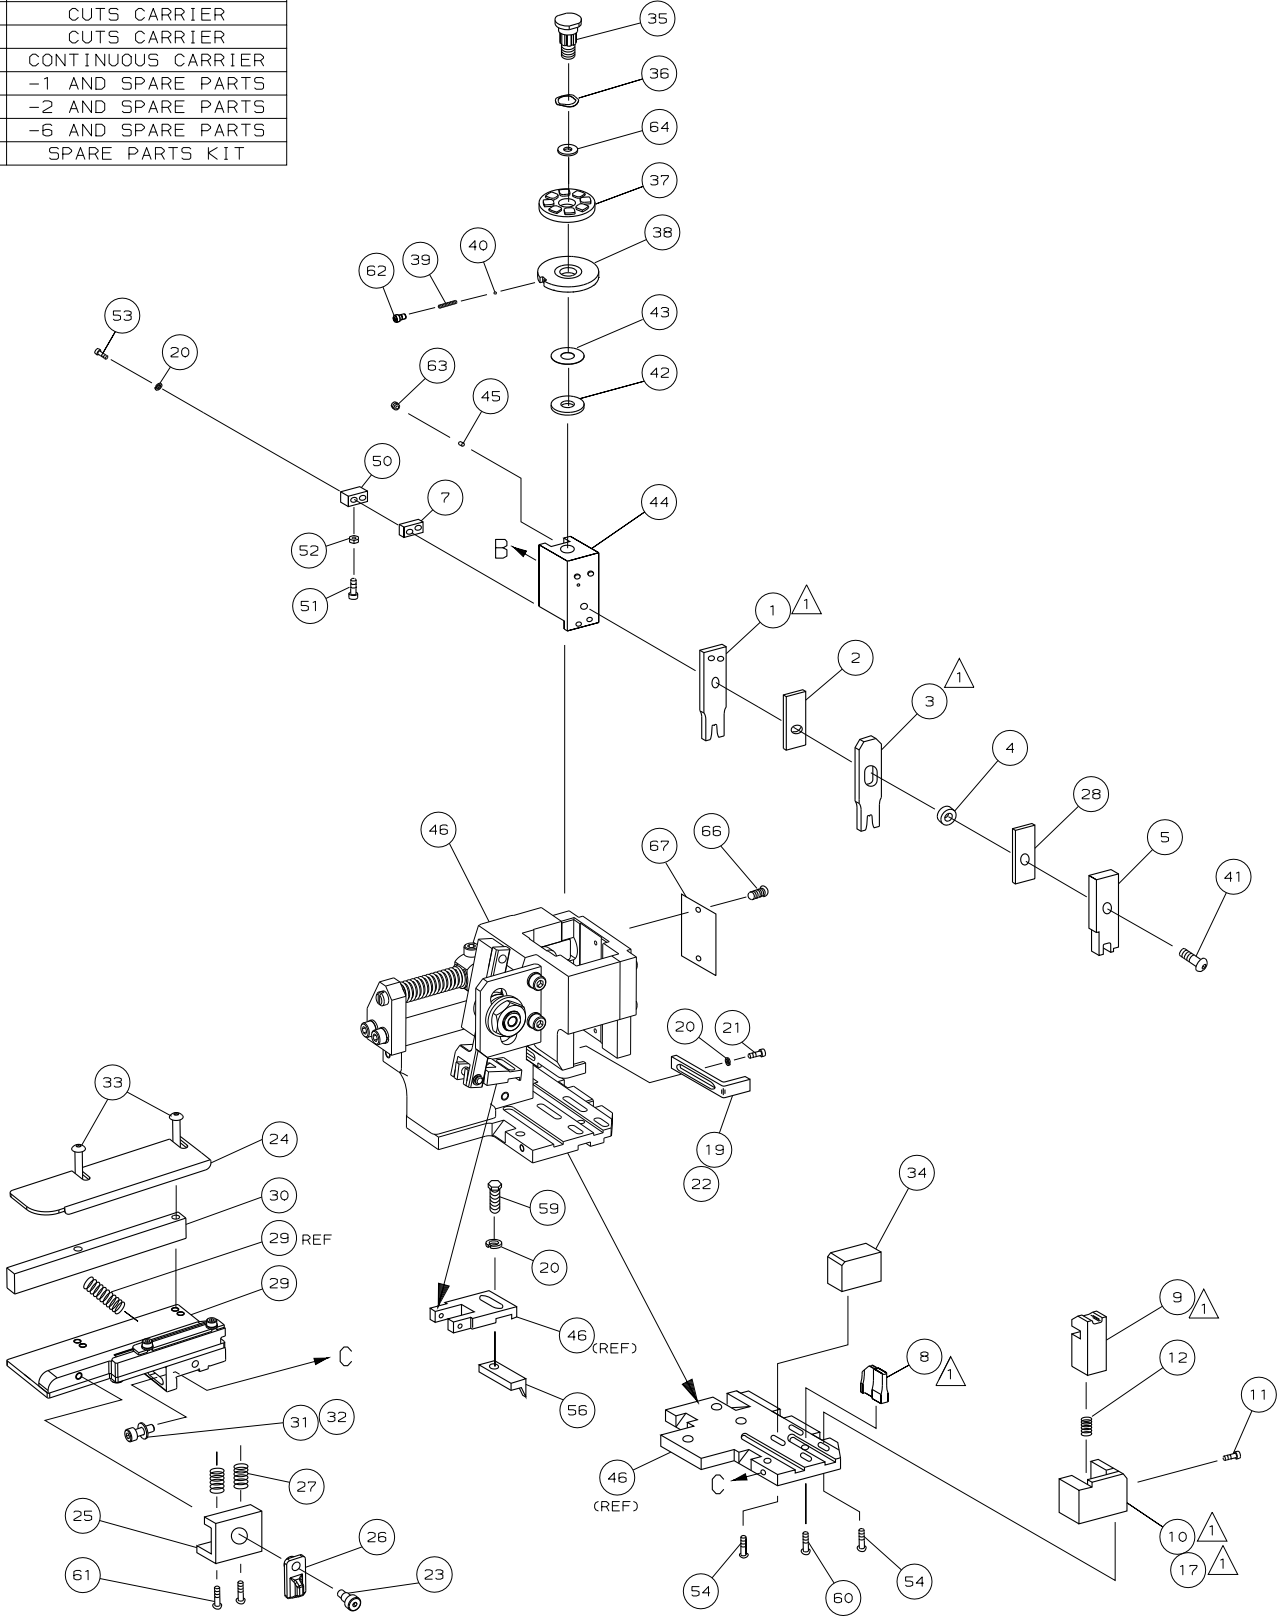

				DIMENSIONS: mm [INCHES]		MATL		HT TR		FIN		
				DO NOT SCALE PRINT.								
				TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR 28JUN00		APP 28JUN00				
F ECR-06-019930				TM	AUG06	M.CLIFFORD		F.BACKHURST				
E 0150-0759-03				RK	JUL03	1 PLC DEC ± 0.5 [1.02 IN]				AMP AMP Incorporated Harrisburg, PA 17105-3608		
D EC 0150-0703-03				CMR	JUL03	2 PLC DEC $\pm$						
C 0150-1497-02				CMR	NOV02	3 PLC DEC $\pm$						
B 0150-0205-02				CE	FEB02	ANGLES $\pm$						
A SEE ECR 015A-0391-00				MC	SEP00	SURF TEXTURE:						
P F LTR				REVISION RECORD	APP	DATE	REMOVE BURRS, BREAK SHARP EDGES RO.38 MAX					
						SCALE		D DWG NO		1426034		
										SHEET 1 OF 1		
										REV F		
3						CARD CODE 00779		CUSTOMER AND ASSEMBLY DRAWING				RESTRICTED TO

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9