


DANIELS HT250 CONTACT RETENTION TESTER ADJUSTABLE TOOL



DATASHEET

SEE REVERSE SIDE FOR IMPORTANT INFORMATION CONCERNING LIMITED WARRANTY, AND LIMITATION OF LIABILITY.

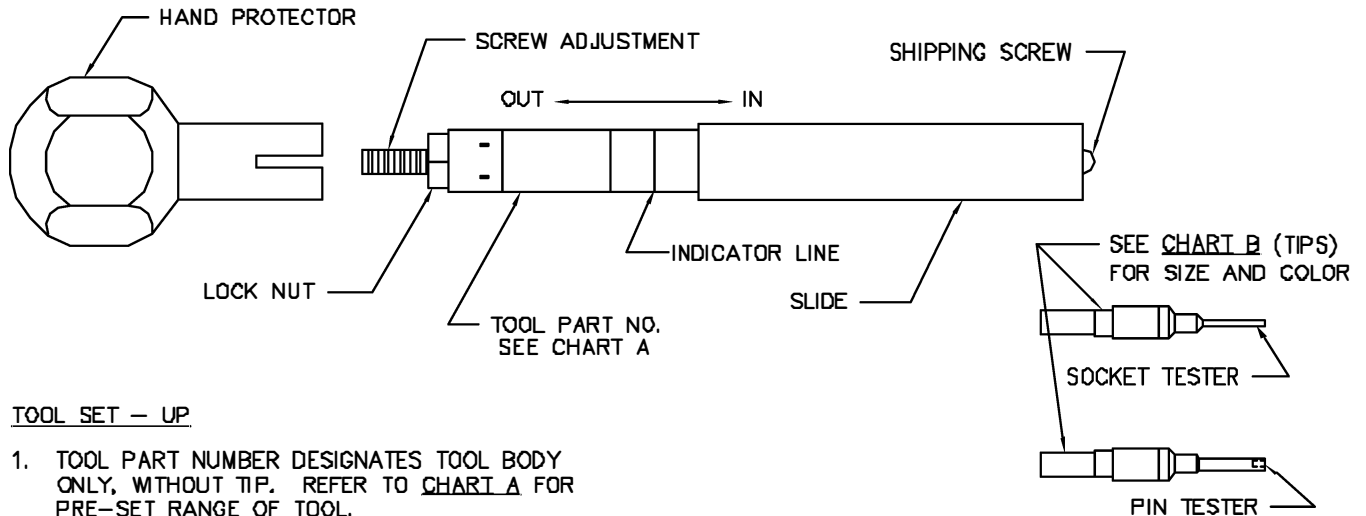

TOOL SET – UP

1. TOOL PART NUMBER DESIGNATES TOOL BODY ONLY, WITHOUT TIP. REFER TO [CHART A](#) FOR PRE-SET RANGE OF TOOL.
2. REMOVE BUTTON HEAD (SHIPPING) SCREW. SELECT APPROPRIATE TIP AND SCREW INTO TOOL BODY THROUGH SLIDE.

TOOL ADJUSTMENT

1. REMOVE HAND PROTECTOR, BACK OFF LOCK NUT AWAY FROM BODY OF TOOL TO ALLOW FREE MOVEMENT OF ADJUSTMENT SCREW.
2. SECURE TOOL IN A SUITABLE FIXTURE WITH FORCE GAGE, OR HOLD FIRMLY BY HAND AND APPLY AXIAL FORCE UNTIL END OF SLIDE IS ALIGNED WITH INDICATOR LINE. NOTE READING OF FORCE ON GAGE (OR ACCURATE WEIGHT-SCALE).
3. ADJUST TOOL TO REQUIRED FORCE BY TURNING ADJUSTMENT SCREW WITH A SCREWDRIVER – CLOCKWISE TO INCREASE AND COUNTER CLOCKWISE TO DECREASE. WHEN REQUIRED VALUE IS ACHIEVED, TIGHTEN LOCK NUT FIRMLY WHILE MAINTAINING ALIGNMENT OF SLIDE AND INDICATOR LINE. TOOL IS NOW SET.
4. NOTE: INSPECTION STICKERS MAY BE USED TO SEAL HAND PROTECTOR ONTO TOOL BODY, IN ORDER TO SIGNAL ANY TAMPERING WITH THE ADJUSTMENT SCREW.

CHART A

TOOL P/N	RANGE (LBS.)
HT250-1	1.5 THRU 3.0
HT250-2	3.2 THRU 5.5
HT250-3	4.0 THRU 8.0
HT250-4	7.0 THRU 18.0
HT250-5	17.0 THRU 25.0
HT250-6	24.0 THRU 40.0

USE OF TOOL

1. TO TEST RETENTION OF SOCKET CONTACTS, USE THE SOCKET TESTER TIP WITH A PRESET TOOL. INSERT TESTER (PIN) INTO MATING END OF CONTACT. TOOL MUST BE IN A STRAIGHT LINE WITH CONTACT. FOR PIN CONTACTS, FIT PIN TESTER TO TOOL BODY AND PLACE OVER CONTACT AT THE MATING END.
2. APPLY PRESSURE TOWARD CONTACT UNTIL SLIDE ALIGNS WITH INDICATOR LINE. CONTACT SHOULD REMAIN IN PLACE.

CHART B

REPLACEMENT TIPS – IDENTIFICATION			
(CONTACT) SIZE	COLOR CODE	SOCKET TESTER	PIN TESTER
12	YELLOW	67-012-01	68-012-01
16	BLUE	67-016-01	68-016-01
20	RED	67-020-01	68-020-01
22, 22M, 22D	COPPER	67-022-01	68-022-01
23	BLACK	67-023-01	68-023-01
26	GREEN	67-026-01	68-026-01

LIMITATION OF LIABILITY

DANIELS MANUFACTURING CORPORATION IS NOT LIABLE FOR CONSEQUENTIAL OR SPECIAL DAMAGES OF ANY NATURE OR KIND RESULTING FROM THE USE, OR MISUSE, OF ANY OF ITS PRODUCTS. OWNERS AND USERS OF DMC PRODUCTS ASSUME FULL RESPONSIBILITY FOR INSTRUCTING THEIR EMPLOYEES IN THE PROPER AND SAFE USE OF SUCH PRODUCTS.

LIMITED WARRANTY

DMC {Daniels Manufacturing Corporation} warrants each new product sold by it to be free from defects in material and workmanship under normal use and service. DMC's obligation under this warranty is limited to the free correction or, at DMC's option, the refund of the purchase price of any such product which proves defective in normal service within ninety (90) days after delivery to the first user, provided that the product is returned to DMC with all transportation charges prepaid and which shall appear to DMC's satisfaction, after DMC's inspection, to have been defective in material or workmanship, it being understood that DMC products are not consumer products. This warranty shall not cover any damage to any product which, in the opinion of DMC, was caused by normal wear, misuse, improper operation, tampering, neglect or accident. This warranty is in lieu of all other warranties express or implied. No warranty, express or implied, is made or authorized to be made or assumed with respect to products of Daniels Manufacturing Corporation other than those herein set forth.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9