

Broadcom BCM82381 PHY Technology

Connecting everything®



DUAL 100GbE CAUI4-to-CAUI4 PHY/OCTAL 25G RETIMER

Overview

The Broadcom® BCM82381 is a low-power, low-latency PHY integrating retimer and equalizer functions that support 100-Gigabit Ethernet (GbE), 40GbE, and 10GbE applications. In 100G mode, the BCM82381 supports two full-duplex 100G ports (CAUI4-to-CAUI4) for SR4, LR4, and copper CR4 CFP2/CFP4/QSFP2 line-card applications. In 40G mode, the BCM82381 supports two full-duplex 40GbE ports (XLPI-to-XLAUI) for SR4, LR4, and copper CR4 QSFP+ line-card applications. In 10G mode, the BCM82381 supports eight full-duplex 10GbE ports (SFI-to-XFI) for SR, LR, and copper CR SFP+ line-card applications.

On-chip clock synthesis is performed by a dual low-cost 156.25 MHz reference clock (for all IEEE Standard 10G/40G/100G rates) via high-frequency, low-jitter phase-locked loops (PLLs). Individual clock recovery is performed on the device by synchronizing directly to the respective incoming data streams.

The BCM82381 was designed in 28 nm CMOS technology to provide a low-power (<2.5W per 100G full-duplex port, including 100G FEC), low-latency (<5 ns round trip) solution with integrated AC coupling capacitors for direct interfacing to Broadcom's switch products.

The BCM82381 is available in a 19 mm x 19 mm, 324-pin BGA, RoHS-compliant package.


Features

- Dual 100GbE ports with CAUI4-to-CAUI4 port support SR4/LR4/CR4 CFP2/CFP4/QSFP2 retimer/equalization applications.
- Dual 40GbE channels with two XLPI-to-XLAUI ports support SR4/LR4/CR4 QSFP+ retimer/equalization applications.
- 10G mode with eight independent 10GbE/1GbE SFI-to-XFI channels support SR/LR/CR SFP+ retimer/equalization applications. Supports an intermix of 1GbE and 10GbE operations on a per-lane basis.
- Low-latency design (<5 ns round trip).

- Low-power retimer/equalizer PHY (<2.5W per 100GbE bidirectional port, including 100G FEC; equivalent to <300 mW per 25G unidirectional channel for 25G retiming mode).
- Seamless high-speed I/O routing to modules.
- Integrated AC-coupling capacitors on all high-speed receivers.
- High-performance receive equalization ~30 dB at system side and ~35 dB at line side for channel loss.
- Programmable transmit preemphasis for flexible PHY placement.
- IEEE 802.3bj 100GbE CR4 Clause 92 transmit training; IEEE 802.3ba 40GbE CR4 Clause 85 transmit training.
- Supports IEEE 802.3bj Clause 91 Forward Error Correction (FEC) and bypassable.
- Supports Fibre Channel rates: 32G/16G/8G/4G FC.
- Supports individual 25G lane retiming mode.
- Line-side and system-side loopbacks.
- Single low-cost 156.25 MHz reference clock.
- Standard two-wire serial interface (BSC) support for external modules.
- Low-speed module I/O control signals for CFP2, CFP4, and QSFP2.
- MDIO interface compliant with IEEE 802.3ae Clause 45 with extended indirect address register access.
- Advanced diagnostics, including eye-mapping and BER with PRBS generators/checkers.
- Dual-supply operation—1.0V/3.3V.

Applications

- High-density line cards support 100GbE CAUI4-to-CAUI4, 40GbE XLPI-to-XLAUI, and 10GbE SFI-to-XFI
- 100GbE CFP2/CFP4/QSFP2 optical and copper interfaces support SR4, LR4, and copper CR4
- 40GbE QSFP+ optical and copper interfaces support SR4, LR4, and copper CR4
- 10GbE SFP+ optical and interfaces support SR, LR, and CR application




Highlights

- IEEE 802.3bj, 802.3ba standard-compliant device
- Dual 100GbE ports with CAUI4-to-CAUI4 port support SR4/LR4/CR4 CFP2/CFP4/QSFP2 retimer/equalization applications
- Octal 25G retimer mode
- Supports 32G/16G/8G/4G Fibre Channel rates
- Low-power 28 nm CMOS

	BCM82380
Service Provider	●
OTN/PTN	◐
Data Centers	●
Enterprise	●

◐ Supported ● Best Choice

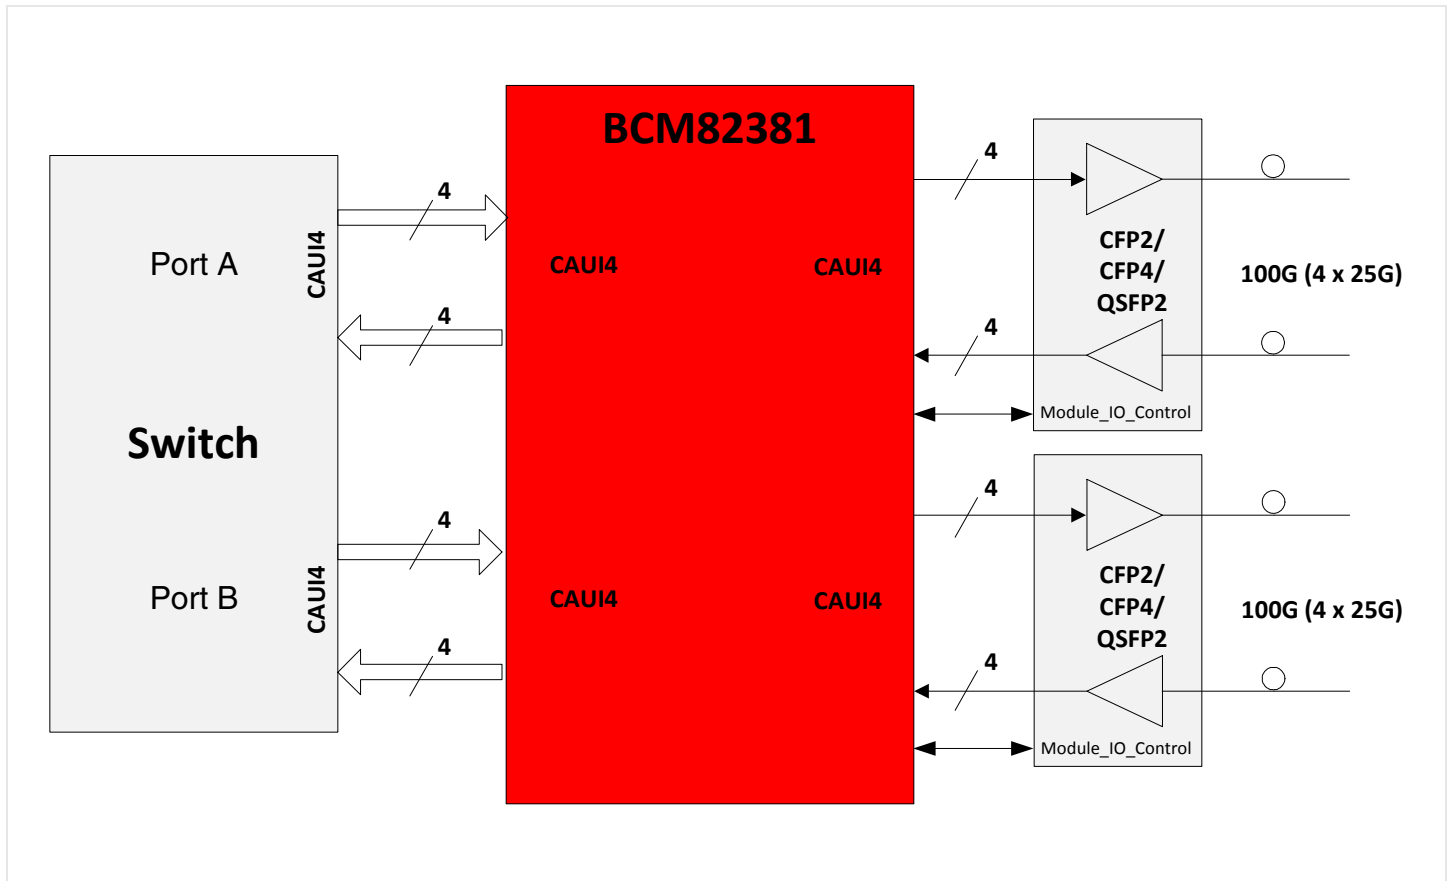

Functional Block Diagram

Ordering Information

Part Number

Dual 100GbE CAUI4-to-CAUI4 PHY/Octal 25G Retimer

BCM82381

About Broadcom

Broadcom Corporation (NASDAQ: BRCM), a FORTUNE 500® company, is a global leader and innovator in semiconductor solutions for wired and wireless communications. Broadcom® products seamlessly deliver voice, video, data, and multimedia connectivity in the home,

office, and mobile environments. With the industry's broadest portfolio of state-of-the-art system-on-a-chip and embedded software solutions, Broadcom is changing the world by Connecting everything®. For more information, go to www.broadcom.com.



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9