


POINTING DEVICE

FID-828 ErgoTrac Sensor

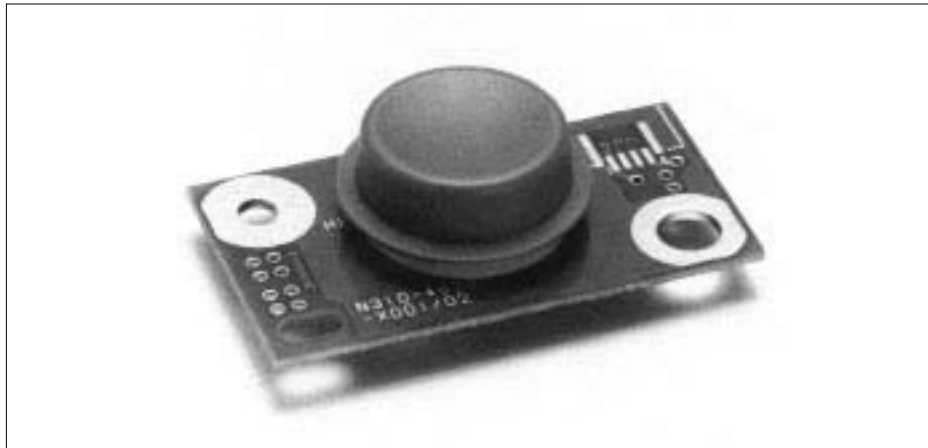

■ FEATURES

- Miniature size
 - Can easily be designed into a keyboard or product enclosure
 - Single keycap space
- Long life and high reliability
 - Unique magnetic field detection technology
 - No mechanical contact to wear out
- Smooth operation
 - Light touch
 - Acceleration control
 - Stable operation in any direction
- RoHS compliant

■ MAIN APPLICATIONS

- Handheld and Notebook computers
- Windows® based applications
- Multi-media equipment
- GPS

■ CONFIGURATION

- Sensor assembly PC board

FID-828 SERIES


■ SPECIFICATIONS

Item		Specification
Mechanical	Detection Method	Unique magnetic field detection technology
	Operation Force	200 gf (7.04 oz.) typ.
	Operating Life	1 M strokes min.
	Weight	15 g (0.528 oz.) typ.
Electrical	Power Supply	+5 V DC, 10 mA max.
	Interface Connector	X/Y analog output Burndy P/N SFW 4R-1STE1 or equivalent
Environment	Operating Temperature	0 to 40°C
	Storage Temperature	-15 to 60°C
	Humidity	90% RH max. at +40°C max. inversely proportional change to 50% RH

■ PART NUMBERS

Parts Number	Part Name	Interface
FID-828-100/20	Sensor	X/Y analog output, RoHS compliant
FID-828-100	Sensor	X/Y analog output, Non-RoHS compliant
N01B-4824-B406	MCU	32 pin SOP; PS/2 output, RoHS compliant

■ DIMENSIONS

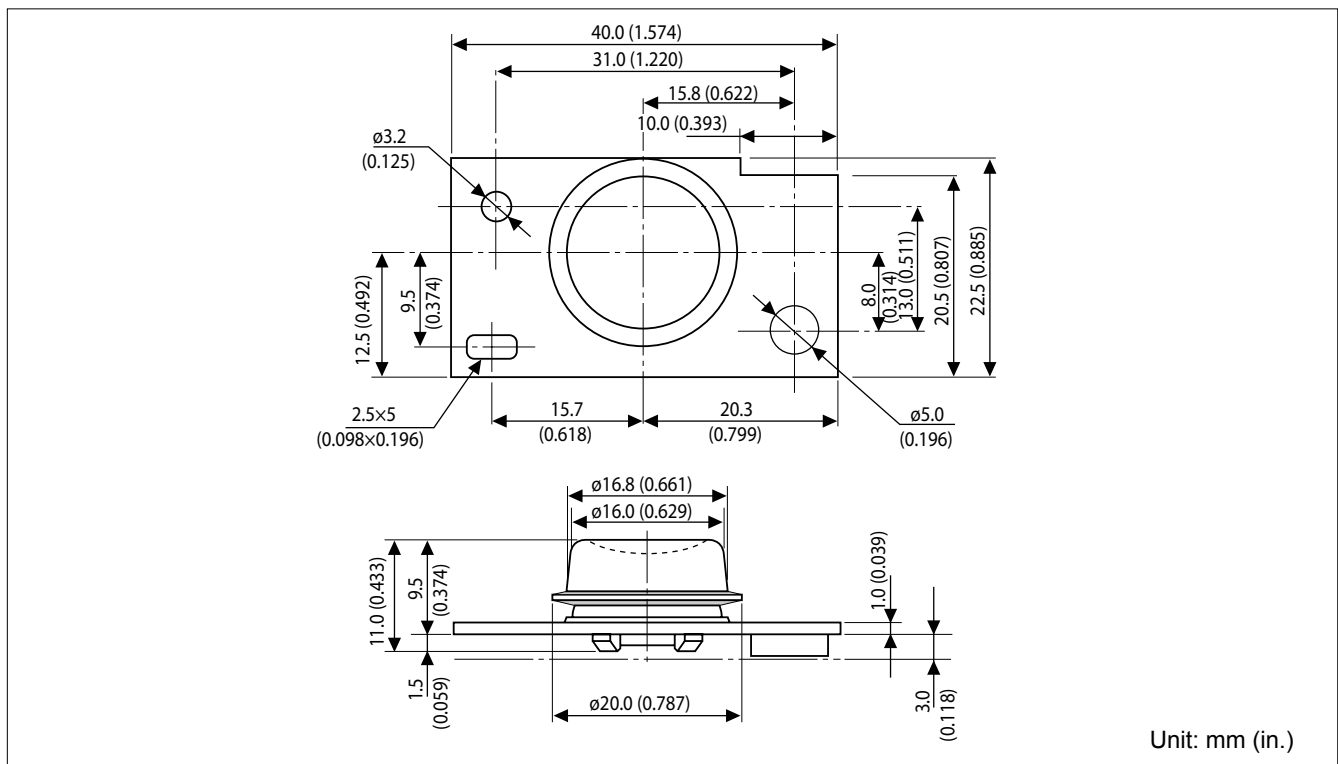

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://www.fujitsu.com/us/services/edevice/components/>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2006 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. May16/2006

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9