

## Features

- Uni and Bi-directional Type Available (Suffix "C" means Bi-directional)
- Surface Mount
- Low Clamping Voltage
- Small, High Thermal Efficiency
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant (Note1) ("P" Suffix Designates RoHS Compliant. See Ordering Information)

## Maximum Ratings

- Operating Junction Temperature Range: -65°C to +175°C
- Storage Temperature Range: -65°C to +175°C
- Typical Thermal Resistance: 26°C/W Junction to Lead
- Typical Thermal Resistance: 300°C/W Junction to Ambient


## Electrical Characteristics @ 25°C Unless Otherwise Specified

|                                                          |           |       |   |
|----------------------------------------------------------|-----------|-------|---|
| Peak Pulse Power Dissipation with a 10/1000µs Waveform   | $P_{PP}$  | 200W  | - |
| ESD Voltage(HBM)                                         | $V_{ESD}$ | >16KV | - |
| Peak forward surge current, 8.3 ms single half sine-wave | $I_{FSM}$ | 30A   | - |

Note:


1. High Temperature Solder Exemption Applied, see EU Directive Annex 7a.

Pin Configuration:



## 200 Watt TVS 5.0 to 170 Volts


## SOD-123FL

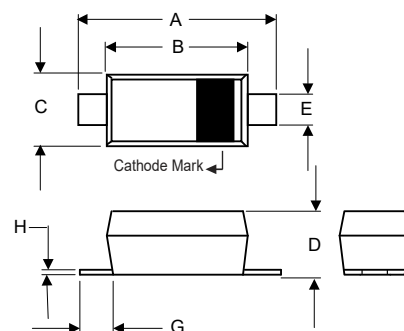

### DIMENSIONS

| DIM | INCHES |       | MM   |      | NOTE |
|-----|--------|-------|------|------|------|
|     | MIN    | MAX   | MIN  | MAX  |      |
| A   | 0.130  | 0.152 | 3.30 | 3.85 |      |
| B   | 0.100  | 0.122 | 2.55 | 3.10 |      |
| C   | 0.055  | 0.075 | 1.40 | 1.90 |      |
| D   | 0.035  | 0.053 | 0.90 | 1.35 |      |
| E   | 0.020  | 0.041 | 0.50 | 1.05 |      |
| G   | 0.010  | ----  | 0.25 | ---- |      |
| H   | ----   | 0.010 | ---- | 0.25 |      |

### SUGGESTED SOLDER PAD LAYOUT

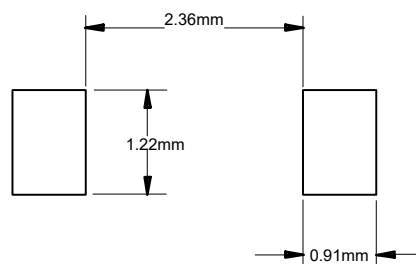

Electrical Characteristics @ 25°C Unless Otherwise Specified

| MCC<br>Part Number | Reverse<br>Stand-Off<br>Voltage | Breakdown Voltage<br>$V_{BR}(V)$ |      | Test Current | Max.<br>Clamping<br>Voltage @ $I_{PP}$ | Max.<br>Peak<br>Pulse<br>Current | Max. Reverse<br>Leakage<br>Current<br>@ $V_{WM}$ | Marking Code |
|--------------------|---------------------------------|----------------------------------|------|--------------|----------------------------------------|----------------------------------|--------------------------------------------------|--------------|
|                    | $V_{WM}(V)$                     | Min                              | Max  | $I_T(mA)$    | $V_C(V)$                               | $I_{PP}(A)$                      | $I_D(\mu A)$                                     |              |
| SMF5.0A            | 5.0                             | 6.4                              | 7.0  | 10           | 9.2                                    | 21.7                             | 400                                              | 5.0A/KE      |
| SMF6.0A            | 6.0                             | 6.67                             | 7.37 | 10           | 10.3                                   | 19.4                             | 400                                              | 6.0A/KG      |
| SMF6.5A            | 6.5                             | 7.22                             | 7.98 | 10           | 11.2                                   | 17.9                             | 250                                              | 6.5A/KK      |
| SMF7.0A            | 7.0                             | 7.78                             | 8.6  | 10           | 12                                     | 16.7                             | 100                                              | 7.0A/KM      |
| SMF7.5A            | 7.5                             | 8.33                             | 9.21 | 1.0          | 12.9                                   | 15.5                             | 50                                               | 7.5A/KP      |
| SMF8.0A            | 8.0                             | 8.89                             | 9.83 | 1.0          | 13.6                                   | 14.7                             | 25                                               | 8.0A/KR      |
| SMF8.5A            | 8.5                             | 9.44                             | 10.4 | 1.0          | 14.4                                   | 13.9                             | 10                                               | 8.5A/KT      |
| SMF9.0A            | 9.0                             | 10                               | 11.1 | 1.0          | 15.4                                   | 13                               | 5.0                                              | 9.0A/KV      |
| SMF10A             | 10                              | 11.1                             | 12.3 | 1.0          | 17                                     | 11.8                             | 2.5                                              | 10A/KX       |
| SMF11A             | 11                              | 12.2                             | 13.5 | 1.0          | 18.2                                   | 11                               | 2.5                                              | 11A/KZ       |
| SMF12A             | 12                              | 13.3                             | 14.7 | 1.0          | 19.9                                   | 10.1                             | 2.5                                              | 12A/LE       |
| SMF13A             | 13                              | 14.4                             | 15.9 | 1.0          | 21.5                                   | 9.3                              | 1.0                                              | 13A/LG       |
| SMF14A             | 14                              | 15.6                             | 17.2 | 1.0          | 23.2                                   | 8.6                              | 1.0                                              | 14A/LK       |
| SMF15A             | 15                              | 16.7                             | 18.5 | 1.0          | 24.4                                   | 8.2                              | 1.0                                              | 15A/LM       |
| SMF16A             | 16                              | 17.8                             | 19.7 | 1.0          | 26                                     | 7.7                              | 1.0                                              | 16A/LP       |
| SMF17A             | 17                              | 18.9                             | 20.9 | 1.0          | 27.6                                   | 7.2                              | 1.0                                              | 17A/LR       |
| SMF18A             | 18                              | 20                               | 22.1 | 1.0          | 29.2                                   | 6.8                              | 1.0                                              | 18A/LT       |
| SMF20A             | 20                              | 22.2                             | 24.5 | 1.0          | 32.4                                   | 6.2                              | 1.0                                              | 20A/LV       |
| SMF22A             | 22                              | 24.4                             | 26.9 | 1.0          | 35.5                                   | 5.6                              | 1.0                                              | 22A/LX       |
| SMF24A             | 24                              | 26.7                             | 29.5 | 1.0          | 38.9                                   | 5.1                              | 1.0                                              | 24A/LZ       |
| SMF26A             | 26                              | 28.9                             | 31.9 | 1.0          | 42.1                                   | 4.8                              | 1.0                                              | 26A/ME       |
| SMF28A             | 28                              | 31.1                             | 34.4 | 1.0          | 45.4                                   | 4.4                              | 1.0                                              | 28A/MG       |
| SMF30A             | 30                              | 33.3                             | 36.8 | 1.0          | 48.4                                   | 4.1                              | 1.0                                              | 30A/MK       |
| SMF33A             | 33                              | 36.7                             | 40.6 | 1.0          | 53.3                                   | 3.8                              | 1.0                                              | 33A/MM       |
| SMF36A             | 36                              | 40                               | 44.2 | 1.0          | 58.1                                   | 3.4                              | 1.0                                              | 36A/MP       |
| SMF40A             | 40                              | 44.4                             | 49.1 | 1.0          | 64.5                                   | 3.1                              | 1.0                                              | 40A/MR       |
| SMF43A             | 43                              | 47.8                             | 52.8 | 1.0          | 69.4                                   | 2.9                              | 1.0                                              | 43A/MT       |
| SMF45A             | 45                              | 50                               | 55.3 | 1.0          | 72.7                                   | 2.8                              | 1.0                                              | 45A/MV       |
| SMF48A             | 48                              | 53.3                             | 58.9 | 1.0          | 77.4                                   | 2.6                              | 1.0                                              | 48A/MX       |
| SMF51A             | 51                              | 56.7                             | 62.7 | 1.0          | 82.4                                   | 2.4                              | 1.0                                              | 51A/MZ       |
| SMF54A             | 54                              | 60                               | 66.3 | 1.0          | 87.1                                   | 2.3                              | 1.0                                              | 54A/NE       |
| SMF58A             | 58                              | 64.4                             | 71.2 | 1.0          | 93.6                                   | 2.1                              | 1.0                                              | 58A/NG       |
| SMF60A             | 60                              | 66.7                             | 73.7 | 1.0          | 96.8                                   | 1.8                              | 1.0                                              | 60A/NK       |
| SMF64A             | 64                              | 71.1                             | 78.6 | 1.0          | 103                                    | 1.7                              | 1.0                                              | 64A/NM       |
| SMF70A             | 70                              | 77.8                             | 86   | 1.0          | 113                                    | 1.5                              | 1.0                                              | 70A/NP       |
| SMF75A             | 75                              | 83.3                             | 92.1 | 1.0          | 121                                    | 1.4                              | 1.0                                              | 75A/NR       |
| SMF78A             | 78                              | 86.7                             | 95.8 | 1.0          | 126                                    | 1.4                              | 1.0                                              | 78A/NT       |
| SMF85A             | 85                              | 94.4                             | 104  | 1.0          | 137                                    | 1.3                              | 1.0                                              | 85A/NV       |
| SMF90A             | 90                              | 100                              | 111  | 1.0          | 146                                    | 1.2                              | 1.0                                              | 90A/NX       |
| SMF100A            | 100                             | 111                              | 123  | 1.0          | 162                                    | 1.1                              | 1.0                                              | 100/NZ       |
| SMF110A            | 110                             | 122                              | 135  | 1.0          | 177                                    | 1.0                              | 1.0                                              | 110/PE       |
| SMF120A            | 120                             | 133                              | 147  | 1.0          | 193                                    | 0.9                              | 1.0                                              | 120/PG       |
| SMF130A            | 130                             | 144                              | 159  | 1.0          | 209                                    | 0.8                              | 1.0                                              | 130/PK       |
| SMF150A            | 150                             | 167                              | 185  | 1.0          | 243                                    | 0.7                              | 1.0                                              | 150/PM       |
| SMF160A            | 160                             | 178                              | 197  | 1.0          | 259                                    | 0.7                              | 1.0                                              | 160/PP       |
| SMF170A            | 170                             | 189                              | 209  | 1.0          | 275                                    | 0.6                              | 1.0                                              | 170/PR       |

## Electrical Characteristics @ 25°C Unless Otherwise Specified

| MCC<br>Part Number | Reverse<br>Stand-Off<br>Voltage | Breakdown Voltage<br>$V_{BR}(V)$ |      | Test Current | Max.<br>Clamping<br>Voltage @ $I_{PP}$ | Max.<br>Peak<br>Pulse<br>Current | Max. Reverse<br>Leakage<br>Current<br>@ $V_{WM}$ | Marking Code |
|--------------------|---------------------------------|----------------------------------|------|--------------|----------------------------------------|----------------------------------|--------------------------------------------------|--------------|
|                    | $V_{WM}(V)$                     | Min                              | Max  | $I_T(mA)$    | $V_C(V)$                               | $I_{PP}(A)$                      | $I_D(\mu A)$                                     |              |
| SMF5.0CA           | 5.0                             | 6.4                              | 7.0  | 10           | 9.2                                    | 21.7                             | 400                                              | 5.0CA/AE     |
| SMF6.0CA           | 6.0                             | 6.67                             | 7.37 | 10           | 10.3                                   | 19.4                             | 400                                              | 6.0CA/AG     |
| SMF6.5CA           | 6.5                             | 7.22                             | 7.98 | 10           | 11.2                                   | 17.9                             | 250                                              | 6.5CA/AK     |
| SMF7.0CA           | 7.0                             | 7.78                             | 8.6  | 10           | 12                                     | 16.7                             | 100                                              | 7.0CA/AM     |
| SMF7.5CA           | 7.5                             | 8.33                             | 9.21 | 1.0          | 12.9                                   | 15.5                             | 50                                               | 7.5CA/AP     |
| SMF8.0CA           | 8.0                             | 8.89                             | 9.83 | 1.0          | 13.6                                   | 14.7                             | 25                                               | 8.0CA/AR     |
| SMF8.5CA           | 8.5                             | 9.44                             | 10.4 | 1.0          | 14.4                                   | 13.9                             | 10                                               | 8.5CA/AT     |
| SMF9.0CA           | 9.0                             | 10                               | 11.1 | 1.0          | 15.4                                   | 13                               | 5.0                                              | 9.0CA/AV     |
| SMF10CA            | 10                              | 11.1                             | 12.3 | 1.0          | 17                                     | 11.8                             | 2.5                                              | 10CA/AX      |
| SMF11CA            | 11                              | 12.2                             | 13.5 | 1.0          | 18.2                                   | 11                               | 2.5                                              | 11CA/AZ      |
| SMF12CA            | 12                              | 13.3                             | 14.7 | 1.0          | 19.9                                   | 10.1                             | 2.5                                              | 12CA/BE      |
| SMF13CA            | 13                              | 14.4                             | 15.9 | 1.0          | 21.5                                   | 9.3                              | 1.0                                              | 13CA/BG      |
| SMF14CA            | 14                              | 15.6                             | 17.2 | 1.0          | 23.2                                   | 8.6                              | 1.0                                              | 14CA/BK      |
| SMF15CA            | 15                              | 16.7                             | 18.5 | 1.0          | 24.4                                   | 8.2                              | 1.0                                              | 15CA/BM      |
| SMF16CA            | 16                              | 17.8                             | 19.7 | 1.0          | 26                                     | 7.7                              | 1.0                                              | 16CA/BP      |
| SMF17CA            | 17                              | 18.9                             | 20.9 | 1.0          | 27.6                                   | 7.2                              | 1.0                                              | 17CA/BR      |
| SMF18CA            | 18                              | 20                               | 22.1 | 1.0          | 29.2                                   | 6.8                              | 1.0                                              | 18CA/BT      |
| SMF20CA            | 20                              | 22.2                             | 24.5 | 1.0          | 32.4                                   | 6.2                              | 1.0                                              | 20CA/BV      |
| SMF22CA            | 22                              | 24.4                             | 26.9 | 1.0          | 35.5                                   | 5.6                              | 1.0                                              | 22CA/BX      |
| SMF24CA            | 24                              | 26.7                             | 29.5 | 1.0          | 38.9                                   | 5.1                              | 1.0                                              | 24CA/BZ      |
| SMF26CA            | 26                              | 28.9                             | 31.9 | 1.0          | 42.1                                   | 4.8                              | 1.0                                              | 26CA/CE      |
| SMF28CA            | 28                              | 31.1                             | 34.4 | 1.0          | 45.4                                   | 4.4                              | 1.0                                              | 28CA/CG      |
| SMF30CA            | 30                              | 33.3                             | 36.8 | 1.0          | 48.4                                   | 4.1                              | 1.0                                              | 30CA/CK      |
| SMF33CA            | 33                              | 36.7                             | 40.6 | 1.0          | 53.3                                   | 3.8                              | 1.0                                              | 33CA/CM      |
| SMF36CA            | 36                              | 40                               | 44.2 | 1.0          | 58.1                                   | 3.4                              | 1.0                                              | 36CA/CP      |
| SMF40CA            | 40                              | 44.4                             | 49.1 | 1.0          | 64.5                                   | 3.1                              | 1.0                                              | 40CA/CR      |
| SMF43CA            | 43                              | 47.8                             | 52.8 | 1.0          | 69.4                                   | 2.9                              | 1.0                                              | 43CA/CT      |
| SMF45CA            | 45                              | 50                               | 55.3 | 1.0          | 72.7                                   | 2.8                              | 1.0                                              | 45CA/CV      |
| SMF48CA            | 48                              | 53.3                             | 58.9 | 1.0          | 77.4                                   | 2.6                              | 1.0                                              | 48CA/CX      |
| SMF51CA            | 51                              | 56.7                             | 62.7 | 1.0          | 82.4                                   | 2.4                              | 1.0                                              | 51CA/CZ      |
| SMF54CA            | 54                              | 60                               | 66.3 | 1.0          | 87.1                                   | 2.3                              | 1.0                                              | 54CA/DE      |
| SMF58CA            | 58                              | 64.4                             | 71.2 | 1.0          | 93.6                                   | 2.1                              | 1.0                                              | 58CA/DG      |
| SMF60CA            | 60                              | 66.7                             | 73.7 | 1.0          | 96.8                                   | 1.8                              | 1.0                                              | 60CA/DK      |
| SMF64CA            | 64                              | 71.1                             | 78.6 | 1.0          | 103                                    | 1.7                              | 1.0                                              | 64CA/DM      |
| SMF70CA            | 70                              | 77.8                             | 86   | 1.0          | 113                                    | 1.5                              | 1.0                                              | 70CA/DP      |
| SMF75CA            | 75                              | 83.3                             | 92.1 | 1.0          | 121                                    | 1.4                              | 1.0                                              | 75CA/DR      |
| SMF78CA            | 78                              | 86.7                             | 95.8 | 1.0          | 126                                    | 1.4                              | 1.0                                              | 78CA/DT      |
| SMF85CA            | 85                              | 94.4                             | 104  | 1.0          | 137                                    | 1.3                              | 1.0                                              | 85CA/DV      |
| SMF90CA            | 90                              | 100                              | 111  | 1.0          | 146                                    | 1.2                              | 1.0                                              | 90CA/DX      |
| SMF100CA           | 100                             | 111                              | 123  | 1.0          | 162                                    | 1.1                              | 1.0                                              | 100C/DZ      |
| SMF110CA           | 110                             | 122                              | 135  | 1.0          | 177                                    | 1.0                              | 1.0                                              | 110C/EE      |
| SMF120CA           | 120                             | 133                              | 147  | 1.0          | 193                                    | 0.9                              | 1.0                                              | 120C/EG      |
| SMF130CA           | 130                             | 144                              | 159  | 1.0          | 209                                    | 0.8                              | 1.0                                              | 130C/EK      |
| SMF150CA           | 150                             | 167                              | 185  | 1.0          | 243                                    | 0.7                              | 1.0                                              | 150C/EM      |
| SMF160CA           | 160                             | 178                              | 197  | 1.0          | 259                                    | 0.7                              | 1.0                                              | 160C/EP      |
| SMF170CA           | 170                             | 189                              | 209  | 1.0          | 275                                    | 0.6                              | 1.0                                              | 170C/ER      |

## Curve Characteristics

Fig. 1 - Peak Pulse Power Rating Curve

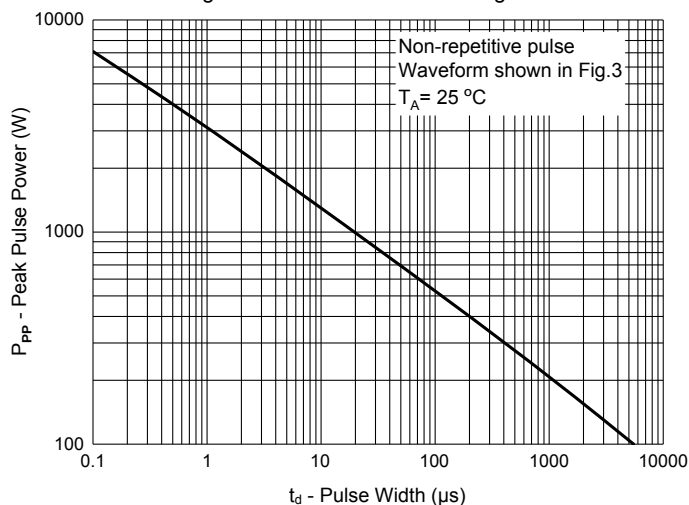


Fig. 2 - Typical Junction Capacitance

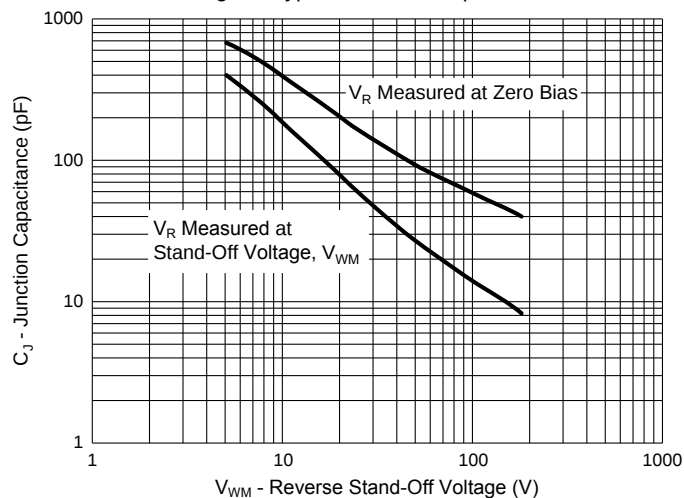


Fig. 3 - Pulse Waveform


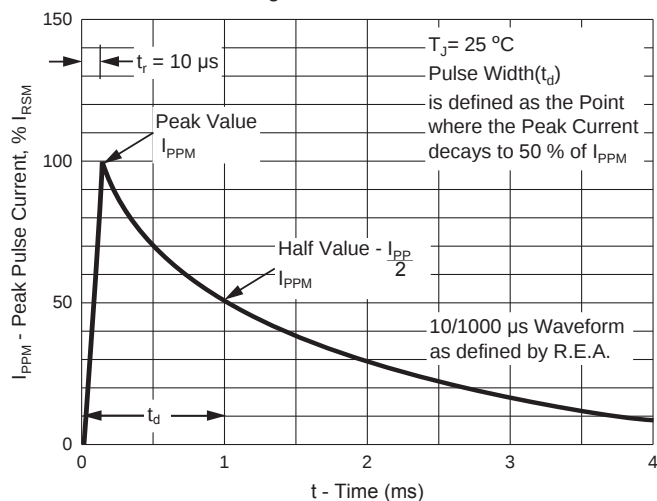


Fig. 4 - Pulse Derating Curve

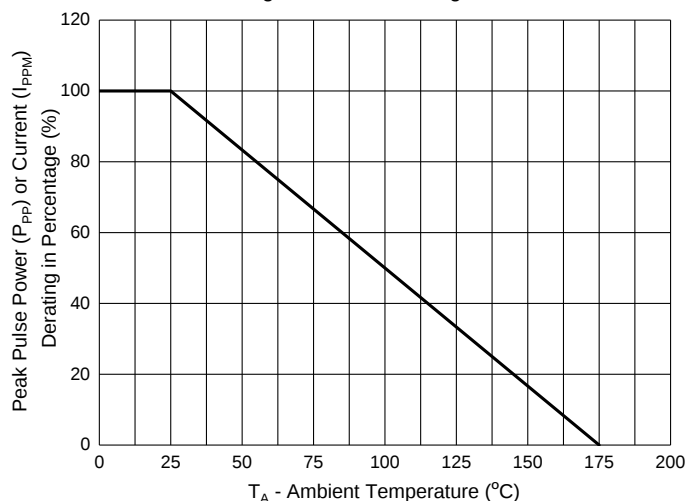

## Ordering Information

| Device         | Packing                |
|----------------|------------------------|
| Part Number-TP | Tape&Reel:2.5Kpcs/Reel |

Note : Adding "-HF" Suffix For Halogen Free, eg. Part Number-TP-HF

### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp** . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp** . and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9