


# Dialight

## 586 VIP Series

Variable Input 6-36 Volts DC

## Single Chip BASED LED

T 3 1/4 MINIATURE SCREW BASE (E10)

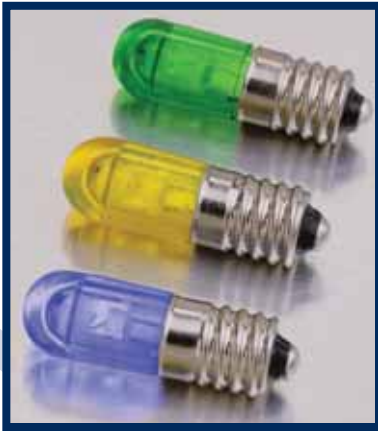


### FEATURES / BENEFITS

- ▲ RoHS Compliant
- ▲ Unique VIP technology provides 6-36 VDC operation
- ▲ High brightness with low current draw - uses up to 90% less energy than an incandescent
- ▲ Long life - typically 100K hours
- ▲ True non-polarized configuration
- ▲ No heat generated
- ▲ Mounts directly into industry standard socket
- ▲ Resistant to shock and vibration
- ▲ AllnGaP and InGaN technology
- ▲ Colors include red, green, yellow, blue and white

Dialight's line of based LED lamps is designed to directly replace many popular subminiature and miniature incandescent lamps. The benefits of LED technology over incandescent are significant: They offer long life, are shock resistant, withstand vibration and provide energy conservation.

### SPECIFICATIONS

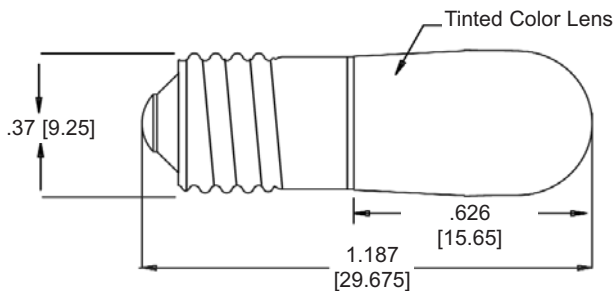

Measurements are typical

Dimensions are inches [mm]

- ▲ Operating voltage: 6-36 VDC
- ▲ Non-polarized
- ▲ Operating temperature: -30°C to +85°C
- ▲ Storage temperature: -40°C to +100°C
- ▲ Replaces incandescent lamp numbers: 40, 46, 1481, 1487, 1821\*

\* See Dialight's Incandescent lamp/based LED cross reference for a complete listing

### CONSIDERATIONS

- ▲ Since lens caps act as filters for the light emitted from the based LED, it is important to match the emitting color of the LED. If not matched properly, the overall light output may be substantially reduced. Dialight recommends using transparent lenses, which will optimize the light output.
- ▲ Operation of the based LED at a higher voltage should not exceed 10% above the recommended voltage.
- ▲ Dialight does not recommend that based LED lamps be used in neon sockets.

Dialight reserves the right to make changes at any time in order to supply the best product possible.



Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • [www.dialight.com](http://www.dialight.com)



MDEL586MSVIP001\_C



# 586 VIP Series

Variable Input 6-36 Volts DC

## Single Chip BASED LED

T 3 1/4 MINIATURE SCREW BASE (E10)

### T 3 1/4 MINIATURE SCREW (E10)

| Part Number   | Color  | Dominant Wavelength (nm) | Nominal Voltage (VDC) | Forward Current TYP. (mA) | Intensity TYP. (mcd) | RoHS Compliant |
|---------------|--------|--------------------------|-----------------------|---------------------------|----------------------|----------------|
| 586-2701-220F | Red    | 630                      | 6-36                  | 10                        | 1000                 | ✓              |
| 586-2702-220F | Green  | 525                      | 6-36                  | 10                        | 1500                 | ✓              |
| 586-2703-220F | Yellow | 592                      | 6-36                  | 10                        | 550                  | ✓              |
| 586-2705-220F | Blue   | 470                      | 6-36                  | 10                        | 200                  | ✓              |
| 586-2706-220F | White  | *                        | 6-36                  | 10                        | 650                  | ✓              |

\* Color Coordinates: x = 0.330, y = 0.365

### Based LEDs *SELECTION*

With the technological advancements in Light Emitting Diodes (LEDs) brightness can now rival the incandescent lamp when used in similar packages. These advancements have created a new type of product called the based LED - an LED with the functionality of an incandescent bulb.

The following styles are currently available in red, green, yellow, blue and white:

- ▲ T 1 3/4 Midget Flange
- ▲ T 1 3/4 Bi-Pin
- ▲ T 1 3/4 Wedge (T5)
- ▲ T 2 Telephone Slide
- ▲ T 3 1/4 Miniature Bayonet (BA9S)
- ▲ T 3 1/4 Miniature Screw (E10)
- ▲ T 3 1/4 Wedge (T10)
- ▲ 15mm SC Bayonet (BA15S)

Dialight's line of based LEDs continues to grow.

Please visit our website for more information.

[www.dialight.com](http://www.dialight.com)

Dialight reserves the right to make changes at any time in order to supply the best product possible.



**Dialight Corporation**

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • [www.dialight.com](http://www.dialight.com)



MDEL586MSVIP001\_C

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Dialight:

|                               |                               |                               |                               |                               |                               |                               |
|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| <a href="#">586-3502-204F</a> | <a href="#">586-3501-204F</a> | <a href="#">586-1101-003F</a> | <a href="#">586-1105-001F</a> | <a href="#">586-1106-003F</a> | <a href="#">586-1201-201F</a> | <a href="#">586-1206-202F</a> |
| <a href="#">586-1206-203F</a> | <a href="#">586-2201-203F</a> | <a href="#">586-2206-201F</a> | <a href="#">586-2206-202F</a> | <a href="#">586-2206-203F</a> | <a href="#">586-3503-204F</a> | <a href="#">586-3505-204F</a> |
| <a href="#">586-3506-204F</a> | <a href="#">586-2202-204F</a> | <a href="#">586-220A-202F</a> | <a href="#">586-1102-003F</a> | <a href="#">586-2205-202F</a> | <a href="#">586-220B-202F</a> | <a href="#">586-1202-203F</a> |
| <a href="#">586-1201-205F</a> | <a href="#">586-1106-005F</a> | <a href="#">586-1205-201F</a> | <a href="#">586-2201-202F</a> | <a href="#">586-2203-203F</a> | <a href="#">586-2203-202F</a> | <a href="#">586-1201-204F</a> |
| <a href="#">586-2206-802F</a> | <a href="#">586-220B-203F</a> | <a href="#">586-1102-005F</a> | <a href="#">586-2202-201F</a> | <a href="#">586-1205-205F</a> | <a href="#">586-2201-205F</a> | <a href="#">586-2206-204F</a> |
| <a href="#">586-1203-202F</a> | <a href="#">586-1202-205F</a> | <a href="#">586-1203-201F</a> | <a href="#">586-1205-202F</a> | <a href="#">586-2203-205F</a> | <a href="#">586-1202-201F</a> | <a href="#">586-1101-005F</a> |
| <a href="#">586-2202-205F</a> | <a href="#">586-1105-005F</a> | <a href="#">586-2206-205F</a> | <a href="#">586-1201-202F</a> | <a href="#">586-2201-204F</a> | <a href="#">586-1206-201F</a> | <a href="#">586-2205-203F</a> |
| <a href="#">586-2202-202F</a> | <a href="#">586-1106-001F</a> | <a href="#">586-1206-801F</a> | <a href="#">586-1201-203F</a> | <a href="#">586-1205-203F</a> | <a href="#">586-1202-204F</a> | <a href="#">586-1101-001F</a> |
| <a href="#">586-1102-001F</a> | <a href="#">586-2202-203F</a> | <a href="#">586-2205-201F</a> | <a href="#">586-1202-202F</a> | <a href="#">586-220A-204F</a> | <a href="#">586-1205-204F</a> | <a href="#">586-2205-204F</a> |
| <a href="#">586-2205-205F</a> | <a href="#">586-2203-201F</a> | <a href="#">586-1206-205F</a> | <a href="#">586-2203-204F</a> | <a href="#">586-2204-204F</a> | <a href="#">586-220A-203F</a> | <a href="#">586-1206-204F</a> |
| <a href="#">586-1203-203F</a> | <a href="#">586-1203-204F</a> | <a href="#">586-1105-003F</a> | <a href="#">586-2201-201F</a> | <a href="#">586-1203-205F</a> | <a href="#">586-2706-205F</a> | <a href="#">586-2703-201F</a> |
| <a href="#">586-2703-220F</a> | <a href="#">586-2701-201F</a> | <a href="#">586-2701-220F</a> | <a href="#">586-2705-220F</a> | <a href="#">586-2705-201F</a> | <a href="#">586-2701-203F</a> | <a href="#">586-2702-203F</a> |
| <a href="#">586-2701-205F</a> | <a href="#">586-2705-203F</a> | <a href="#">586-2706-201F</a> | <a href="#">586-2706-220F</a> | <a href="#">586-2702-201F</a> | <a href="#">586-2705-205F</a> | <a href="#">586-2703-203F</a> |
| <a href="#">586-2702-220F</a> | <a href="#">586-2706-203F</a> | <a href="#">586-2702-205F</a> | <a href="#">586-2703-205F</a> | <a href="#">586-0001-805F</a> | <a href="#">586-0001-802F</a> | <a href="#">586-0012-806F</a> |
| <a href="#">586-220C-804F</a> | <a href="#">586-0012-806</a>  |                               |                               |                               |                               |                               |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9