

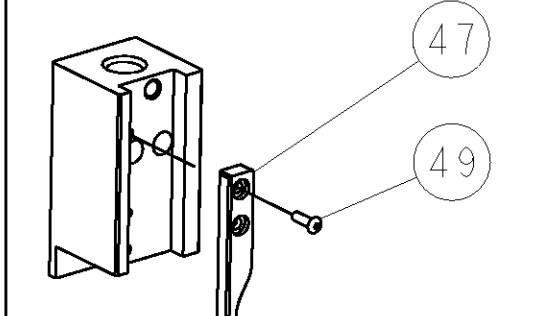
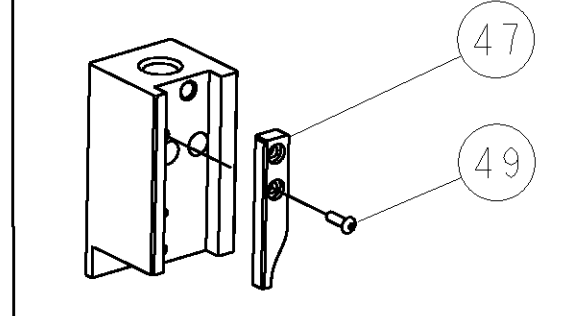
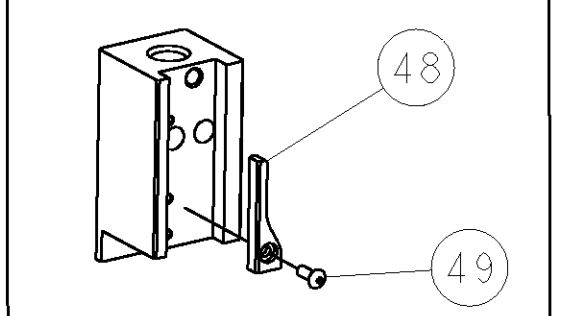
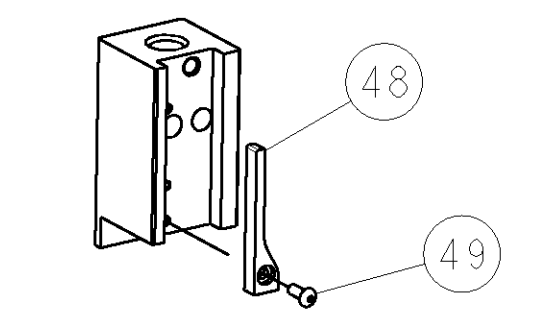




8			7		
THIS DRAWING IS UNPUBLISHED.			RELEASED FOR PUBLICATION		
20			20		
© COPYRIGHT 20			BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.		
PART NUMBER	REV	TERMINATOR	FEED TYPE	DESCRIPTION	
1530060-1	A	LEADMAKER	MECH POST FEED	CUTS CARRIER	
1530060-2	A	BENCH	MECH PRE FEED	CUTS CARRIER	
1530060-6	A	LEADMAKER	MECH POST FEED	CONTINUOUS CARRIER	
7-1530060-1	A	LEADMAKER	MECH POST FEED	-1 AND SPARE PARTS	
7-1530060-2	A	BENCH	MECH PRE FEED	-2 AND SPARE PARTS	
7-1530060-6	A	LEADMAKER	MECH POST FEED	-6 AND SPARE PARTS	
7-1530060-7	A	-	-	SPARE PARTS KIT	

CRIMP DATA		LEAR TERMINAL		TE CRIMP SPECS		
TERMINAL NAME: RECEPTACLE TERMINAL						
CRIMP	SIZE	TYPE	RANGE			
WIRE	2.79 [.110 IN]	F	16-14 AWG			
INSUL	3.05 [.120 IN]	F	Ø 3.05mm MAX [Ø .120 MAX]			
WIRE STRIP LENGTH 4.75-5.13 [.187-.202 IN]			APPL INSTRUCTIONS 408-8322 & 408-8490			
TERMINAL APPL SPEC		NONE	-		FEED 18.67 [.735 IN]	
TERMINALS APPLIED						
TE PN		MNF PN		-	-	
1949009-1		771416-HK200		-	-	
1949009-2		771416-FK200		-	-	
-		-		-	-	
-		-		-	-	
WIRE SIZE			CRIMP HEIGHT		REF SETTING	
14AWG		2.11 ±0.05 [.083 ±.002 IN]		C1		
16AWG		1.88 ±0.05 [.074 ±.002 IN]		D8		
-		-		-		
-		-		-		
-		-		-		
-		-		-		
-		-		-		
-		-		-		
-		-		-		
-		-		-		
-		-		-		
-		-		-		

- △ RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
- △ CERTAIN TERMINALS REQUIRE LUBRICATION. REFER TO THE APPLICATOR INSTRUCTION SHEET FOR MORE INFORMATION.
4. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

* WARNING
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN. REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

VIEW B ROTATED 180°			
POST-FEED 40mm STROKE	POST-FEED 30mm STROKE	PRE-FEED 30mm STROKE	PRE-FEED 40mm STROKE
			

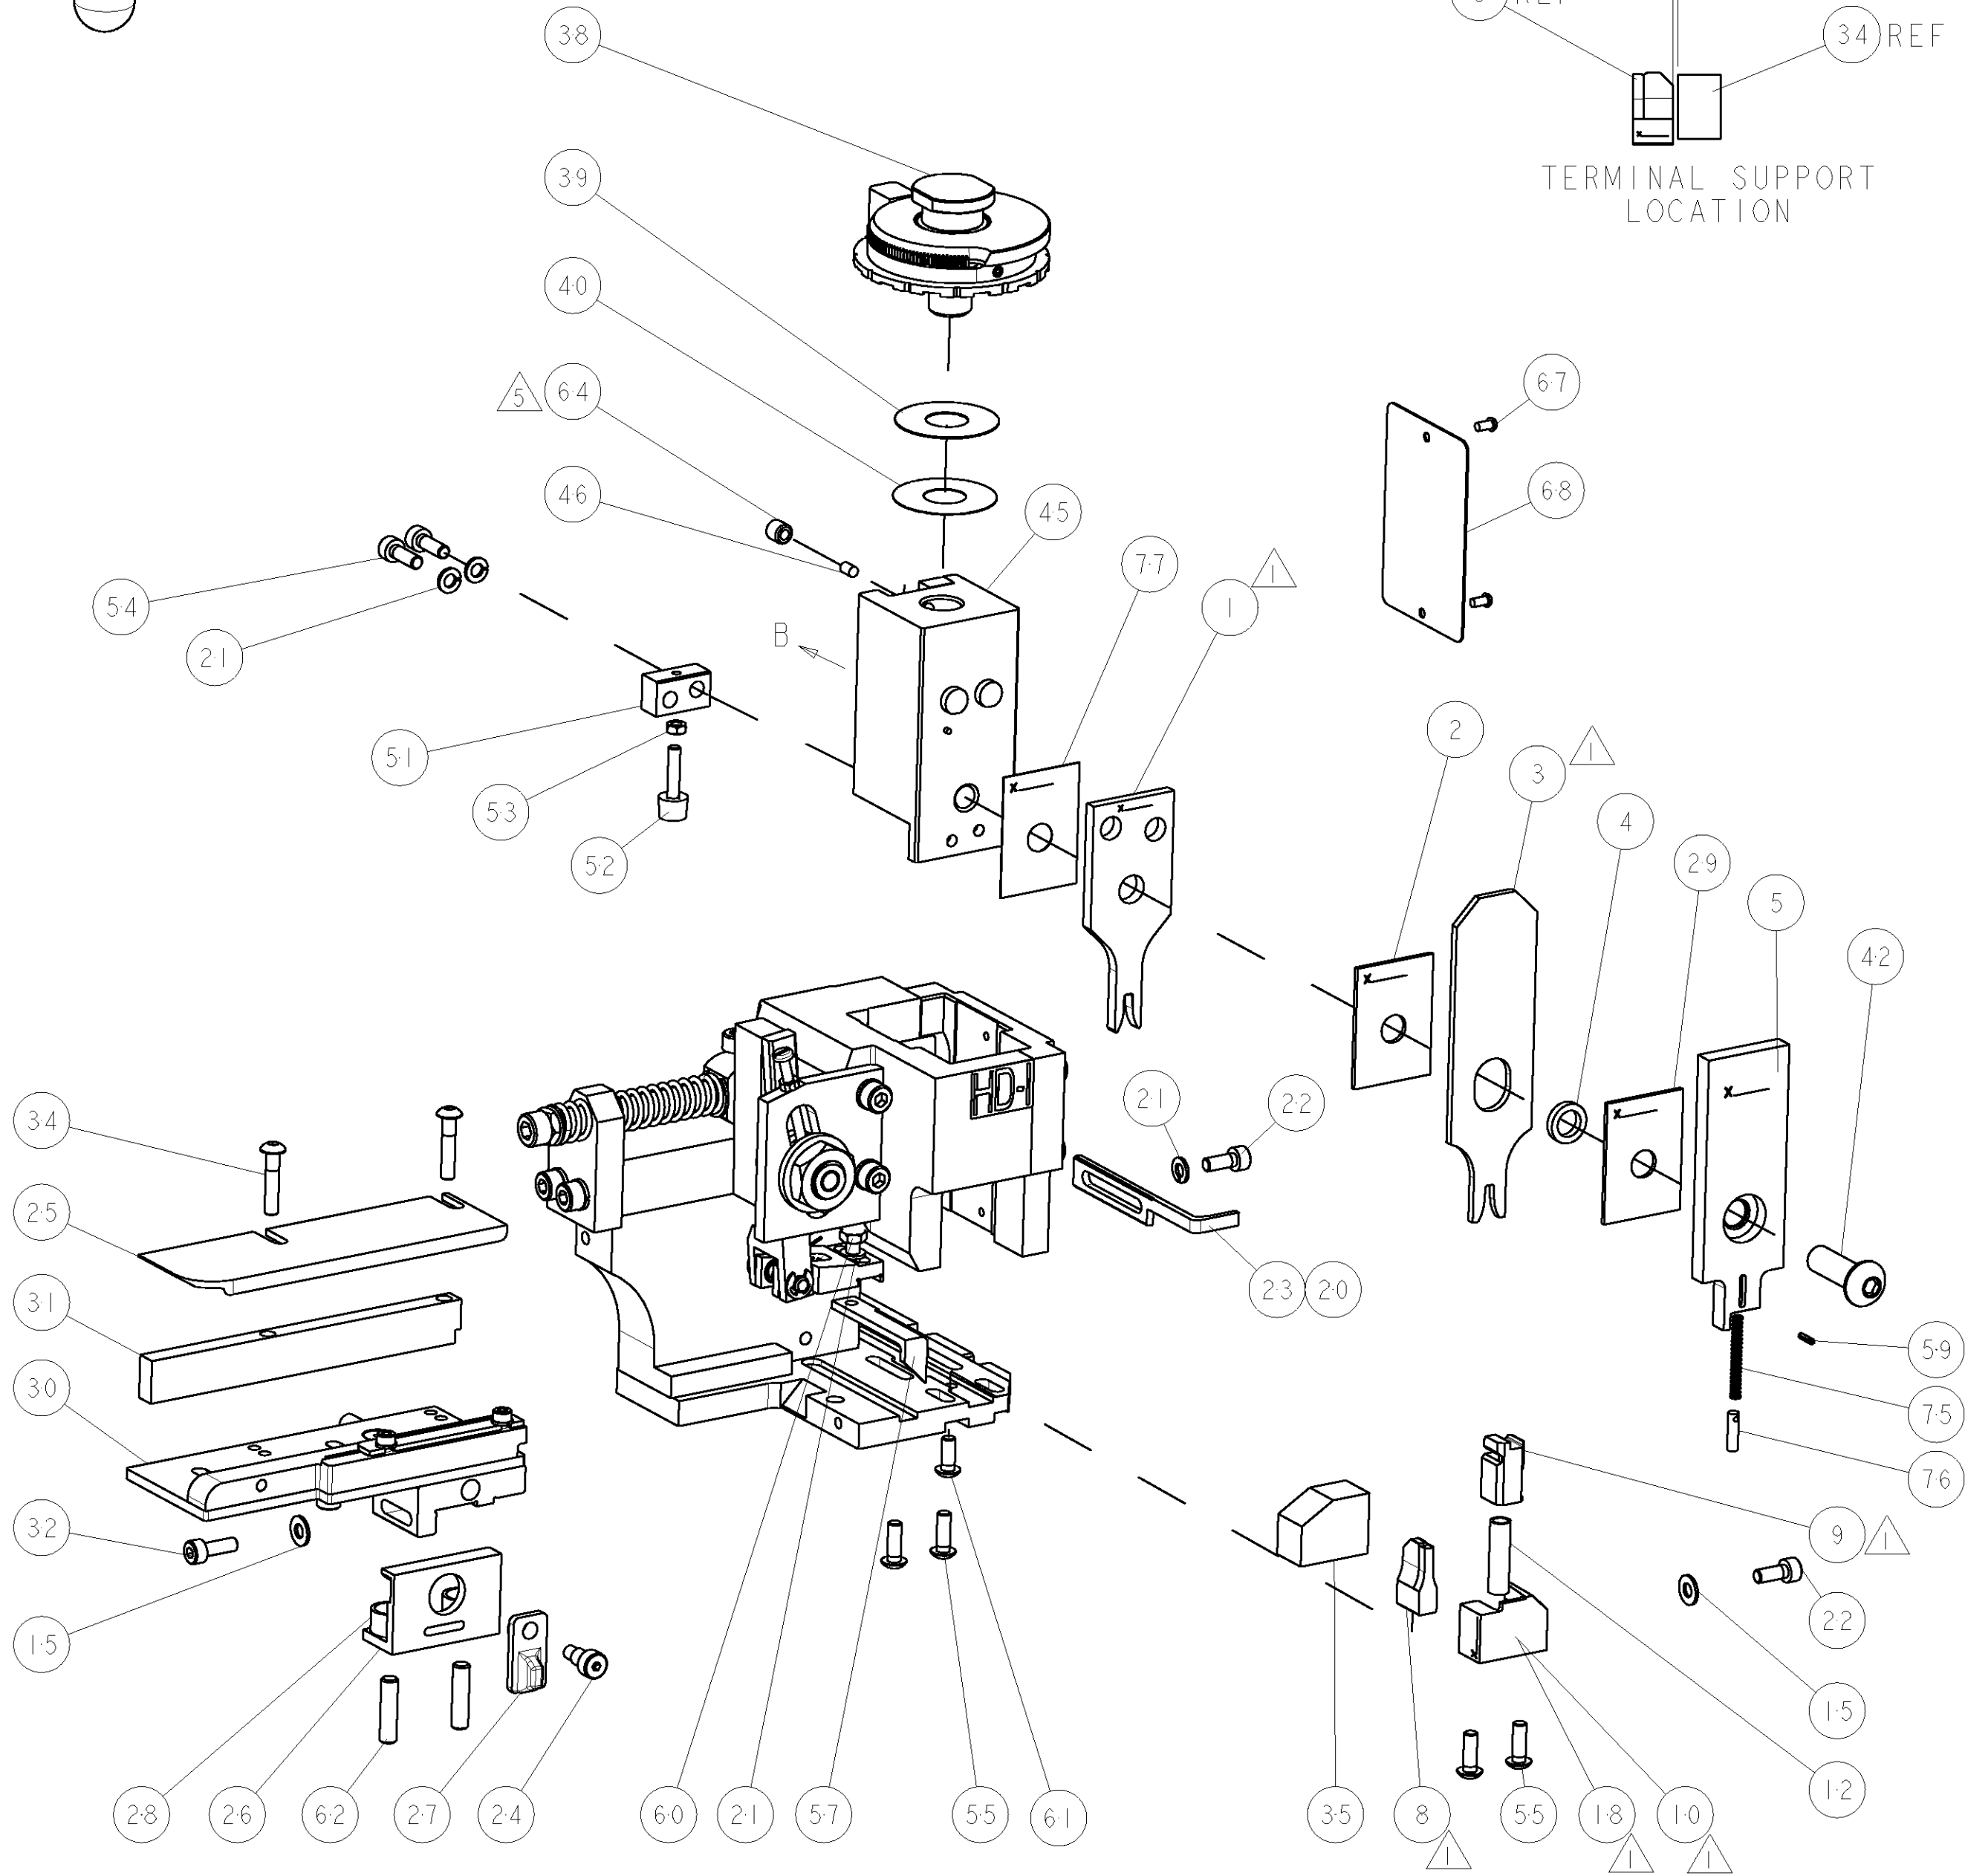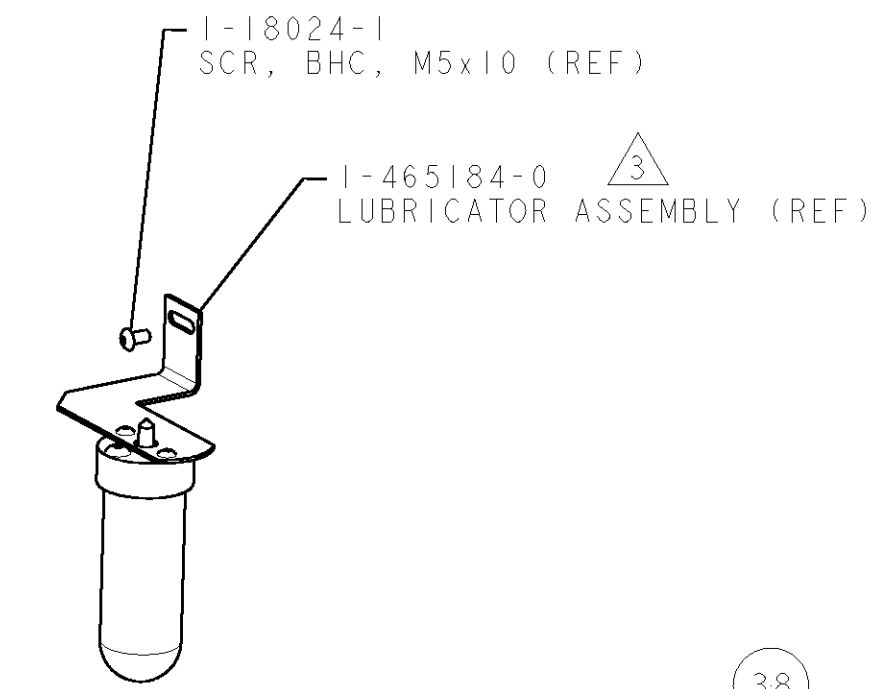

-	1	1	1	1	1	1	1	455888-1	SPACER, CRIMPER	77
-	1	1	1	1	1	1	1	854769-4	HOLDER, INS	76
-	1	1	1	1	1	1	1	1-22278-0	SPRING, COMPRESSION	75
-	-	-	-	-	-	-	-	-	-	74
-77	-76	-72	-71	-6	-2	-1		PART NO	DESCRIPTION	ITEM NO

SET UP GAGE
458637-3

LOC	DIST	REVISIONS					
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
			I	DEVELOPMENT	21JAN2009	K.H	S.X
			A	RELEASED	20MAR2009	BH	BH

-	-	-	-	-	-	-	-	-	-	73
-	1	1	1	1	1	1	1	1338705-3	DOCUMENTATION PACKAGE	72
-	-	-	-	-	-	-	-	-	-	71
-	-	-	-	-	-	-	-	-	-	70
-	-	-	-	-	-	-	-	-	-	69
-	1	1	1	1	1	1	1	461264-5	PLATE, IDENTIFICATION	68
-	2	2	2	2	2	2	2	21017-2	SCREW, DRIVE	67
-	-	-	-	-	-	-	-	-	-	66
-	-	-	-	-	-	-	-	-	-	65
-	1	1	1	1	1	1	1	3-18031-0	SCR, SET, CUP POINT M6 X 6.0	64
-	-	-	-	-	-	-	-	-	-	63
-	2	2	2	2	2	2	2	2-18032-5	SCR, SET, FLT POINT M5 X 20.0	62
-	1	1	1	1	1	1	1	18024-7	SCR, BTN SKT HD CAP (M4 X 10.0)	61
-	1	1	1	1	1	1	1	5-18022-2	SCR, HEX HD CAP M4 X 8.0	60
-	1	1	1	1	1	1	1	21028-2	PIN, SLOTTED SPRING .062 X .250	59
-	-	-	-	-	-	-	-	-	-	58
-	1	1	1	1	1	1	1	1338685-1	PAWL, FEED	57
-	-	-	-	-	-	-	-	-	-	56
-	4	4	4	4	4	4	4	18024-8	SCR, BTN SKT HD CAP (M4 X 12.0)	55
-	2	2	2	2	2	2	2	1-18023-2	SCR, SKT HD CAP M4 X 12.0	54
-	1	1	1	1	1	1	1	18030-1	NUT, HEX, REG M3	53
-	1	1	1	1	1	1	1	811242-5	BUMPER, HOLD DOWN	52
-	1	1	1	1	1	1	1	690753-2	SPACER, TONKER	51
-	1	1	1	1	1	1	1	18024-3	SCR, BTN SKT HD CAP (M3 X 10.0)	50
-	-	1	-	-	1	-	-	1338675-1	CAM, UNIVERSAL PRE FEED	49
-	1	-	1	1	-	1	-	1338676-1	CAM, UNIVERSAL POST-FEED	48
-	1	1	1	1	1	1	1	1320999-3	APPLICATOR SUBASSEMBLY, HDI	47
-	1	1	1	1	1	1	1	690191-1	PLUG,NYLON	46
-	1	1	1	1	1	1	1	1333257-1	RAM	45
-	-	-	-	-	-	-	-	-	-	44
-	-	-	-	-	-	-	-	-	-	43
-	1	1	1	1	1	1	1	2-18024-6	SCR, BTN SKT HD CAP (M8 X 25.0)	42
-	-	-	-	-	-	-	-	-	-	41
-	1	1	1	1	1	1	1	690125-1	SHIM SUB-ASSY	40
-	1	1	1	1	1	1	1	1-469367-0	SHIM	39
-	1	1	1	1	1	1	1	879103-2	FINE ADJUST HEAD ASSEMBLY	38
-	-	-	-	-	-	-	-	-	-	37
-	-	-	-	-	-	-	-	-	-	36
-	1	1	1	1	1	1	1	1320934-6	SUPPORT, TERMINAL	35
-	2	2	2	2	2	2	2	1-18024-0	SCR, BTN SKT HD CAP (M4 X 20.0)	34
-	1	1	1	1	1	1	1	18027-2	WASHER, FLAT, REG M4	33
-	1	1	1	1	1	1	1	1-18023-2	SCR, SKT HD CAP M4 X 12.0	32
-	1	1	1	1	1	1	1	1320908-2	SPACER, STRIP GUIDE	31
-	1	1	1	1	1	1	1	1633073-1	STRIP GUIDE ASSEMBLY	30
-	1	1	1	1	1	1	1	1-455888-0	SPACER, CRIMPER	29
-	2	2	2	2	2	2	2	1-22284-0	SPRING, COMPRESSION	28
-	1	1	1	1	1	1	1	356835-1	LEVER, DRAG RELEASE	27
-	1	1	1	1	1	1	1	240792-1	DRAG, TERMINAL	26
-	1	1	1	1	1	1	1	1320928-1	PLATE, STRIP GUIDE	25
-	1	1	1	1	1	1	1	980371-4	SCR, SKT HD SHLDR 5.0 DIA X 6.0	24
-	1	-	1	1	-	1	-	690472-2	STRIPPER	23
-	1	1	1	1	1	1	1	1-18023-1	SCR, SKT HD CAP M4 X 10.0	22
-	4	4	4	4	4	4	4	18025-2	WASHER, SPRG LOCK, REG M4	21
-	-	1	-	-	1	-	-	690472-1	STRIPPER	20
-	-	-	-	-	-	-	-	-	-	19
-	1	-	-	1	-	-	-	1338684-1	SHEAR HOLDER, FRONT	18
-	-	-	-	-	-	-	-	-	-	17
-	-	-	-	-	-	-	-	-	-	16
-	1	1	1	1	1	1	1	18027-2	WASHER, FLAT, REG M4	15
-	-	-	-	-	-	-	-	-	-	14
-	-	-	-	-	-	-	-	-	-	13
-	1	1	1	1	1	1	1	3-22280-3	SPRING, COMPRESSION	12
-	1	1	1	1	1	1	1	1-18023-1	SCR, SKT HD CAP M4 X 10.0	11
△	-	1	1	-	1	1	1	1320921-1	SHEAR HOLDER, FRONT, CUT	10
△	-	1	1	1	1	1	1	1-454276-9	FLOATING SHEAR, FRONT	9
△	1	2	2	2	1	1	1	5-1333207-1	ANVIL, COMBINATION .100	8
-	-	-	-	-	-	-	-	-	-	7
-	-	-	-	-	-	-	-	-	-	6
-	1	1	1	1	1	1	1	1-854772-4	DEPRESSOR, SHEAR	5
-	1	1	1	1	1	1	1	1-238011-7	BLOCK, CRIMPER SPACER	4
1	2	2	2	1	1	1	1	1-456134-0	CRIMPER, INSULATION F PREMIUM	3
-	1	1	1	1	1	1	1	1-455888-1	SPACER, CRIMPER	2
1	2	2	2	1	1	1	1	456408-6	CRIMPER, WIRE PREMIUM	1

-77	-76	-72	-71	-6	-2	-1		PART NO	DESCRIPTION	ITEM NO
THIS IS SUBJECT TO CHANGE WITHOUT NOTICE. THE USER SHALL BE RESPONSIBLE FOR VERIFYING THE LATEST REVISIONS SHOULD BE CONTACTED FOR THE LATEST EDITION.								DWN K. HUANG 21JAN2009	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm [IN]								CHK S. XI 21JAN2009	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.005 1 PLC ±.005 2 PLC ±.005 3 PLC ±.005 4 PLC ±.005 ANGLES ±.005								PRODUCT SPEC APPLICATION SPEC See Table	FINE ADJUST SIDE FEED HDI APPLICATOR	
MATERIAL								FINISH	SIZE A1	
WEIGHT								CAGE CODE 00779	DRAWING NO ©=1530060	
CUSTOMER DRAWING								SCALE 3:5	SHEET 1 OF 1	
									REV A	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9