

Model 232TTL **CE**

Four-Channel RS-232 to TTL Converter

Description

The 232TTL converts RS-232 to TTL levels. Two channels are used to convert from RS-232 to 0 to +5 VDC TTL signals and two channels are used to convert from 0 to +5 VDC TTL signals to RS-232. This converter supports RD, TD, RTS, and CTS. The DB25P male connector (DCE) is for the RS-232 side. The DB25S female connector is for the TTL side. The pins used are:

DB25P Male RS-232

Pin	Function
2 (input)	TD
3 (output)	RD
4 (input)	RTS
5 (output)	CTS

DB25S Female TTL

Pin	
9 (output)	
14 (input)	
16 (output)	
23 (input)	

Pin 7 is signal ground for both connectors. The unit can work at baud rates up to 115K baud. On the RS-232 side, pins 8 (DCD), 20 (DTR), and 6 (DSR) are connected to open pads, if you would rather use these instead of the given RS-232 lines. Another feature is that the TTL and RS-232 pins can be changed by connecting wires from the pins you want to pads that have been provided. The unit needs a +12VDC power supply (100 mA approx.). A power supply is available from B&B Electronics.

It is important that TTL logic, and only TTL logic (0 to +5 VDC) is used for the TTL side of the converter. The maximum sinking current for one TTL output is 3.2 mA. The maximum source current for one TTL is 1 mA. Signal levels are inverted by the converter. Please refer to table below.

Polarity


TTL Input	RS-232 Output	Units
low	positive	volts
high	negative	volts
TTL Output	RS-232 Input	Units
low	positive	volts
high	negative	volts

DECLARATION OF CONFORMITY

Manufacturer's Name: B&B Electronics Manufacturing Company
 Manufacturer's Address: P.O. Box 1040
 707 Dayton Road
 Ottawa, IL 61350 USA
 Model Numbers: 232TTL
 Description: Four Channel RS-232 to TTL Converter
 Type: Light industrial equipment
 Application of Council Directive: 89/336/EEC
 Standards: EN 55022
 EN 61000-6-1
 EN 61000 (-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11)

Robert M. Paratore, Director of Engineering

CE

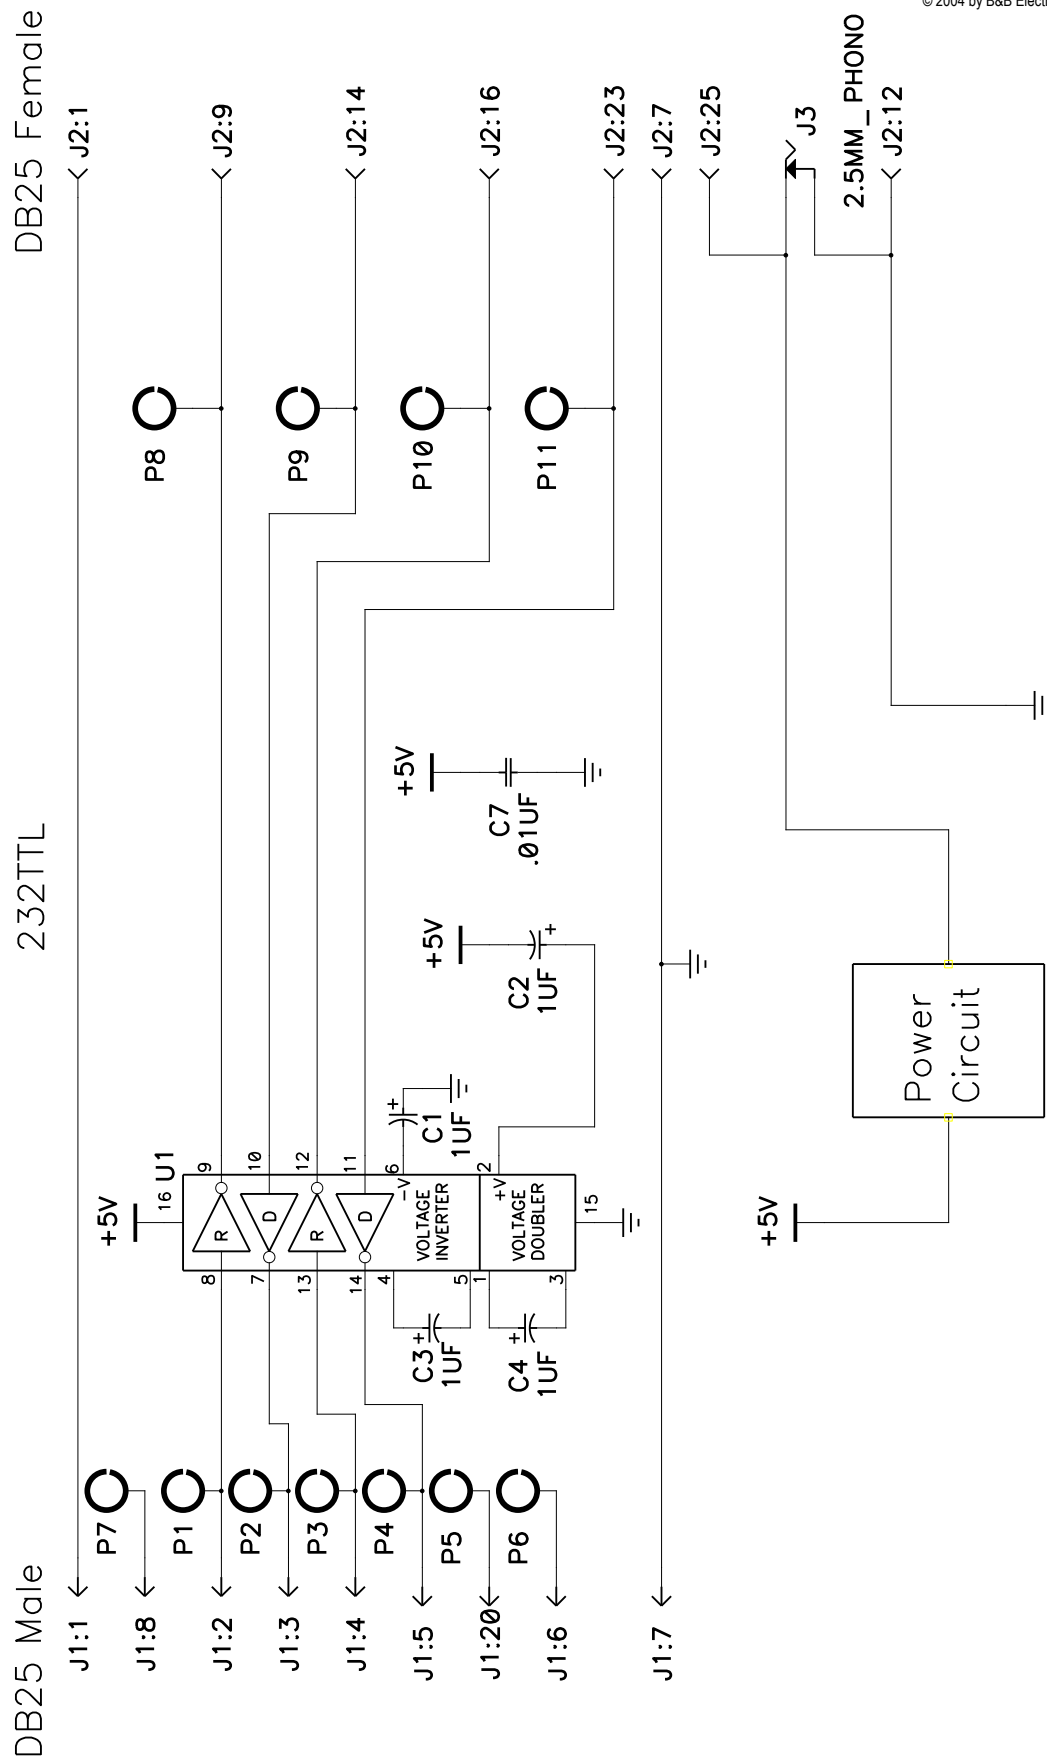

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9