



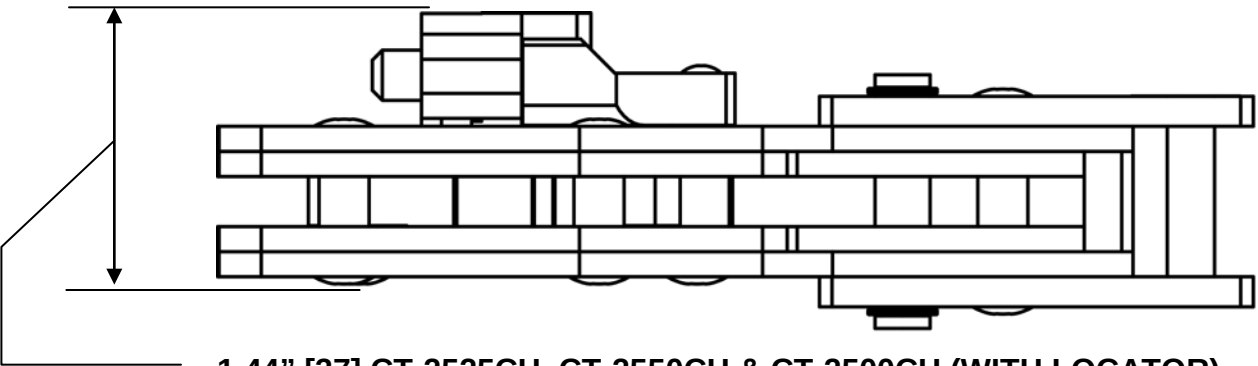

1.44" [37] CT-2525CH, CT-2550CH & CT-2500CH (WITH LOCATOR)
1.25" [32] CT-2570CH (WITHOUT LOCATOR)

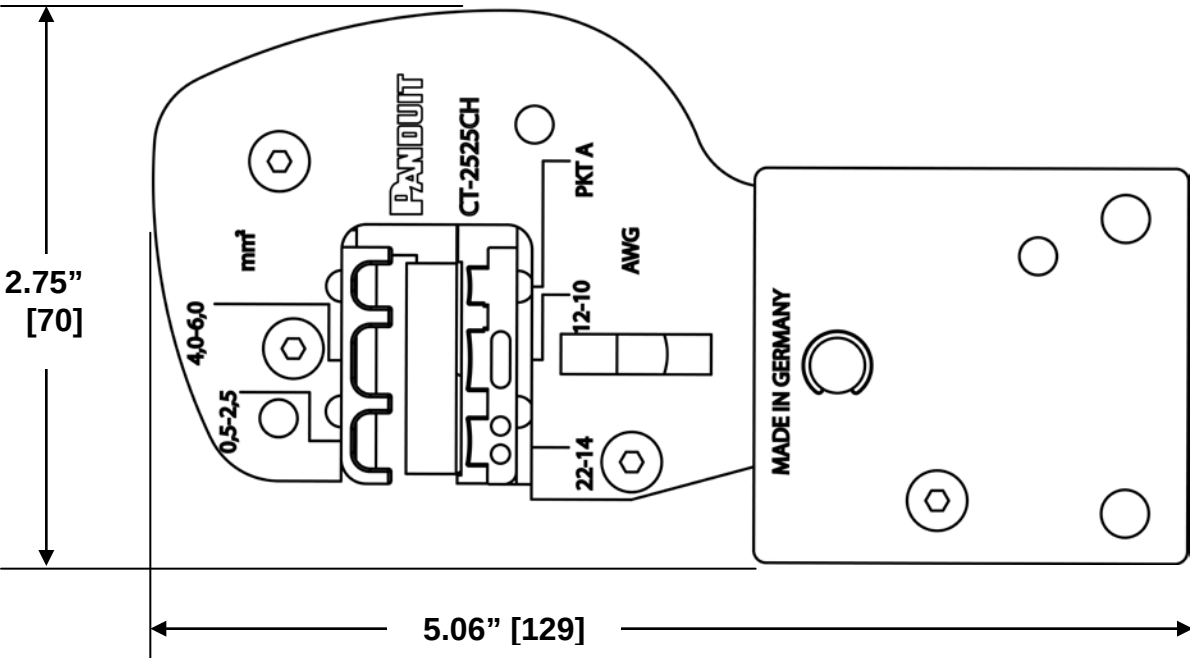

NOTES, UNLESS OTHERWISE SPECIFIED:

- These crimping heads are used with Panduit CT-2500 and CT-2500/E Battery Operated Crimping Tools.
- Weight 1.74 lbs. (0,79 kg)
- Dimensions: 5-1/16" L x 2-3/4" H x 1-7/16" W (with Locator)
[129 L x 70 H x 37 W] mm
- CT-2525CH or CD-525 Crimping head or die insert for installing the following Panduit products:
#26 – #22 AWG (0,14 – 0,5 mm²) insulated terminals and splices,
#22 – #10 AWG (0,5 – 6,0mm²) fully insulated disconnects, insulated parallel splices; and specific #22 – #14 AWG (0,5 – 2,5mm²) barrel insulated disconnects.
- CT-2550CH or CD-550 Crimping head or die insert for installing the following Panduit products:
#22 – #10 AWG (0,5 – 6,0mm²) insulated terminals and splices;
and specific insulated disconnects.
Reduced crimp effort advantage for #12 – #10 AWG (4,0 – 6,0mm²) terminations.
- CT-2570CH or CD-570 Crimping head or die insert for installing most of the following Panduit products:
#22 – #10 AWG (0,5 – 6,0mm²) non-insulated terminals, disconnects; and specific non-insulated splices.
- CT-2500CH Crimping head (frame only); to be used with crimping die inserts CD-525, CD-550 or CD-570 (sold separately).

The Crimping Head and/or Die Insert Installation Instructions can be found at www.panduit.com, search for CT-2525CH, CT-2550CH, CT-2570CH, CT-2500CH, CD-525, CD-550 or CD-570.

Dimensions in [brackets] are in millimeters.
All dimensions are for reference only.

F:\wrkgrp\rvusers\ENGR DOCS\CUSTOMER DRAWINGS\TP25387B01_03 CT-25XXCH CD.doc

CT-2525CH
SHOWN ABOVE

										PANDUIT CORP. TINLEY PARK, ILLINOIS				
										CD*CT-2525CH, CT-2550CH, CT-2570CH, CT-2500CH				
03	5-27-14	BLR	BJPU	ADD MM ² DIMS TO CT-2525CH / CT-2550CH	4752	---	ABJ			UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
02	1-28-14	BLR	BJPU	UPD BRANDING	4704	---	ABJ			(.x) ± ---- (.xxx) ± ---- (.xx) ± ---- ANGLES ± ----				
01	4-04-08	BLR	BJPU	ADD CT-2500CH & DIE INSERTS	4290	---	JRWA			DRAWN BY: BLR	MATL: -----	SCALE NONE		
00	3-02-07	BLR	SRRE	RELEASED	4241	---	SZ			DATE: 3-02-07		DRAWING NO. TP25387B01		DWG B SIZE
REV	DATE	BY	CHK'D	DESCRIPTION	ECN	- R	CUST	SUP		CHK'D: SRRE				

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9