

DRAWING MADE IN THIRD ANGLE PROJECTION

PART NUMBER	REV	FIRST USED	TERMINATOR	FEED TYPE	DESCRIPTION
1528345-1	B	-	LEADMAKER	MECH POST FEED	CUTS CARRIER
1528345-2	B	-	BENCH	MECH PRE FEED	CUTS CARRIER
1528345-6	B	-	LEADMAKER	MECH POST FEED	CONTINUOUS CARRIER
7-1528345-1	B	-	LEADMAKER	MECH POST FEED	-1 AND SPARE PARTS
7-1528345-2	B	-	BENCH	MECH PRE FEED	-2 AND SPARE PARTS
7-1528345-6	B	-	LEADMAKER	MECH POST FEED	-6 AND SPARE PARTS
7-1528345-7	A	-	-	-	SPARE PARTS KIT

CONTROLLED DOCUMENT.

CRIMP DATA AMP TERMINAL AMP CRIMP SPECS				
TERMINAL NAME: POSITIVE LOCK RECEPTACLE				
CRIMP	SIZE	TYPE	RANGE	
WIRE	1.78 [.070 IN]	F	0.20mm ² - 0.50mm ²	
INSUL	2.29 [.090 IN]	0V/5	1.00-1.60 [.039-.063 IN]	
WIRE STRIP LENGTH		APPL INSTRUCTION		
4.20-4.80 [.165-.189 IN]		408-8322 & 408-8490		
TERMINAL	-	-		FEED
APPL SPEC	114-18365	-		26.42 [1.040 IN]

TERMINALS APPLIED				
928909	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

WIRE SIZE	CRIMP HEIGHT	REF SETTING
mm ² AWG		
0.50mm ²	1.26 ±0.05 [.050 ±.002 IN]	B4
0.35mm ²	1.19 ±0.05 [.047 ±.002 IN]	B9
0.25mm ²	1.15 ±0.05 [.045 ±.002 IN]	C2
0.20mm ²	1.13 ±0.05 [.044 ±.002 IN]	C5

LAYOUT	SET UP GAGE
1528345	458637-3

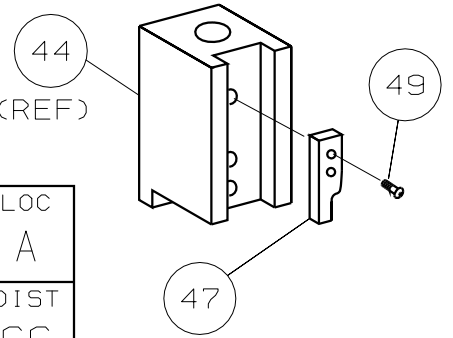
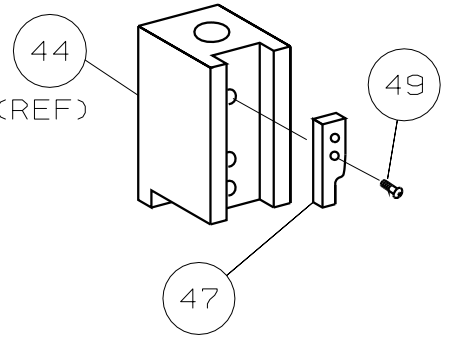
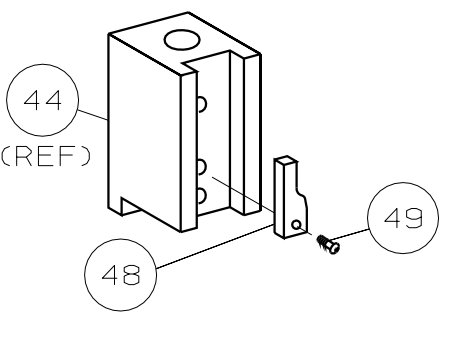
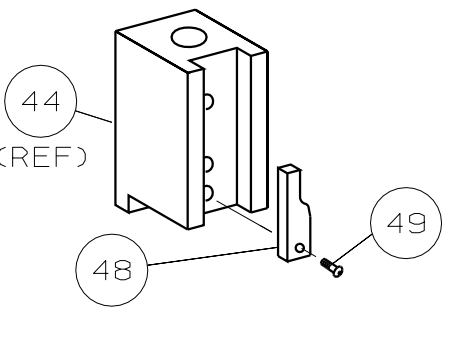
-  RECOMMENDED SPARE PARTS.
2.


GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3.

LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4.

FEED PAWL RUNS ALONG OUTSIDE EDGE OF FRONT STRIP GUIDE.
5.


INSULATION TYPE REQUESTED BY SPECIFIC CUSTOMER AND MAY NOT CONFORM TO APPLICATION SPECIFICATION REQUIREMENTS.

VIEW B ROTATED 180°			
POST FEED 40 mm STROKE	POST FEED 30 mm STROKE	PRE FEED 30 mm STROKE	PRE FEED 40 mm STROKE
			
LOC A			
DIST 66			

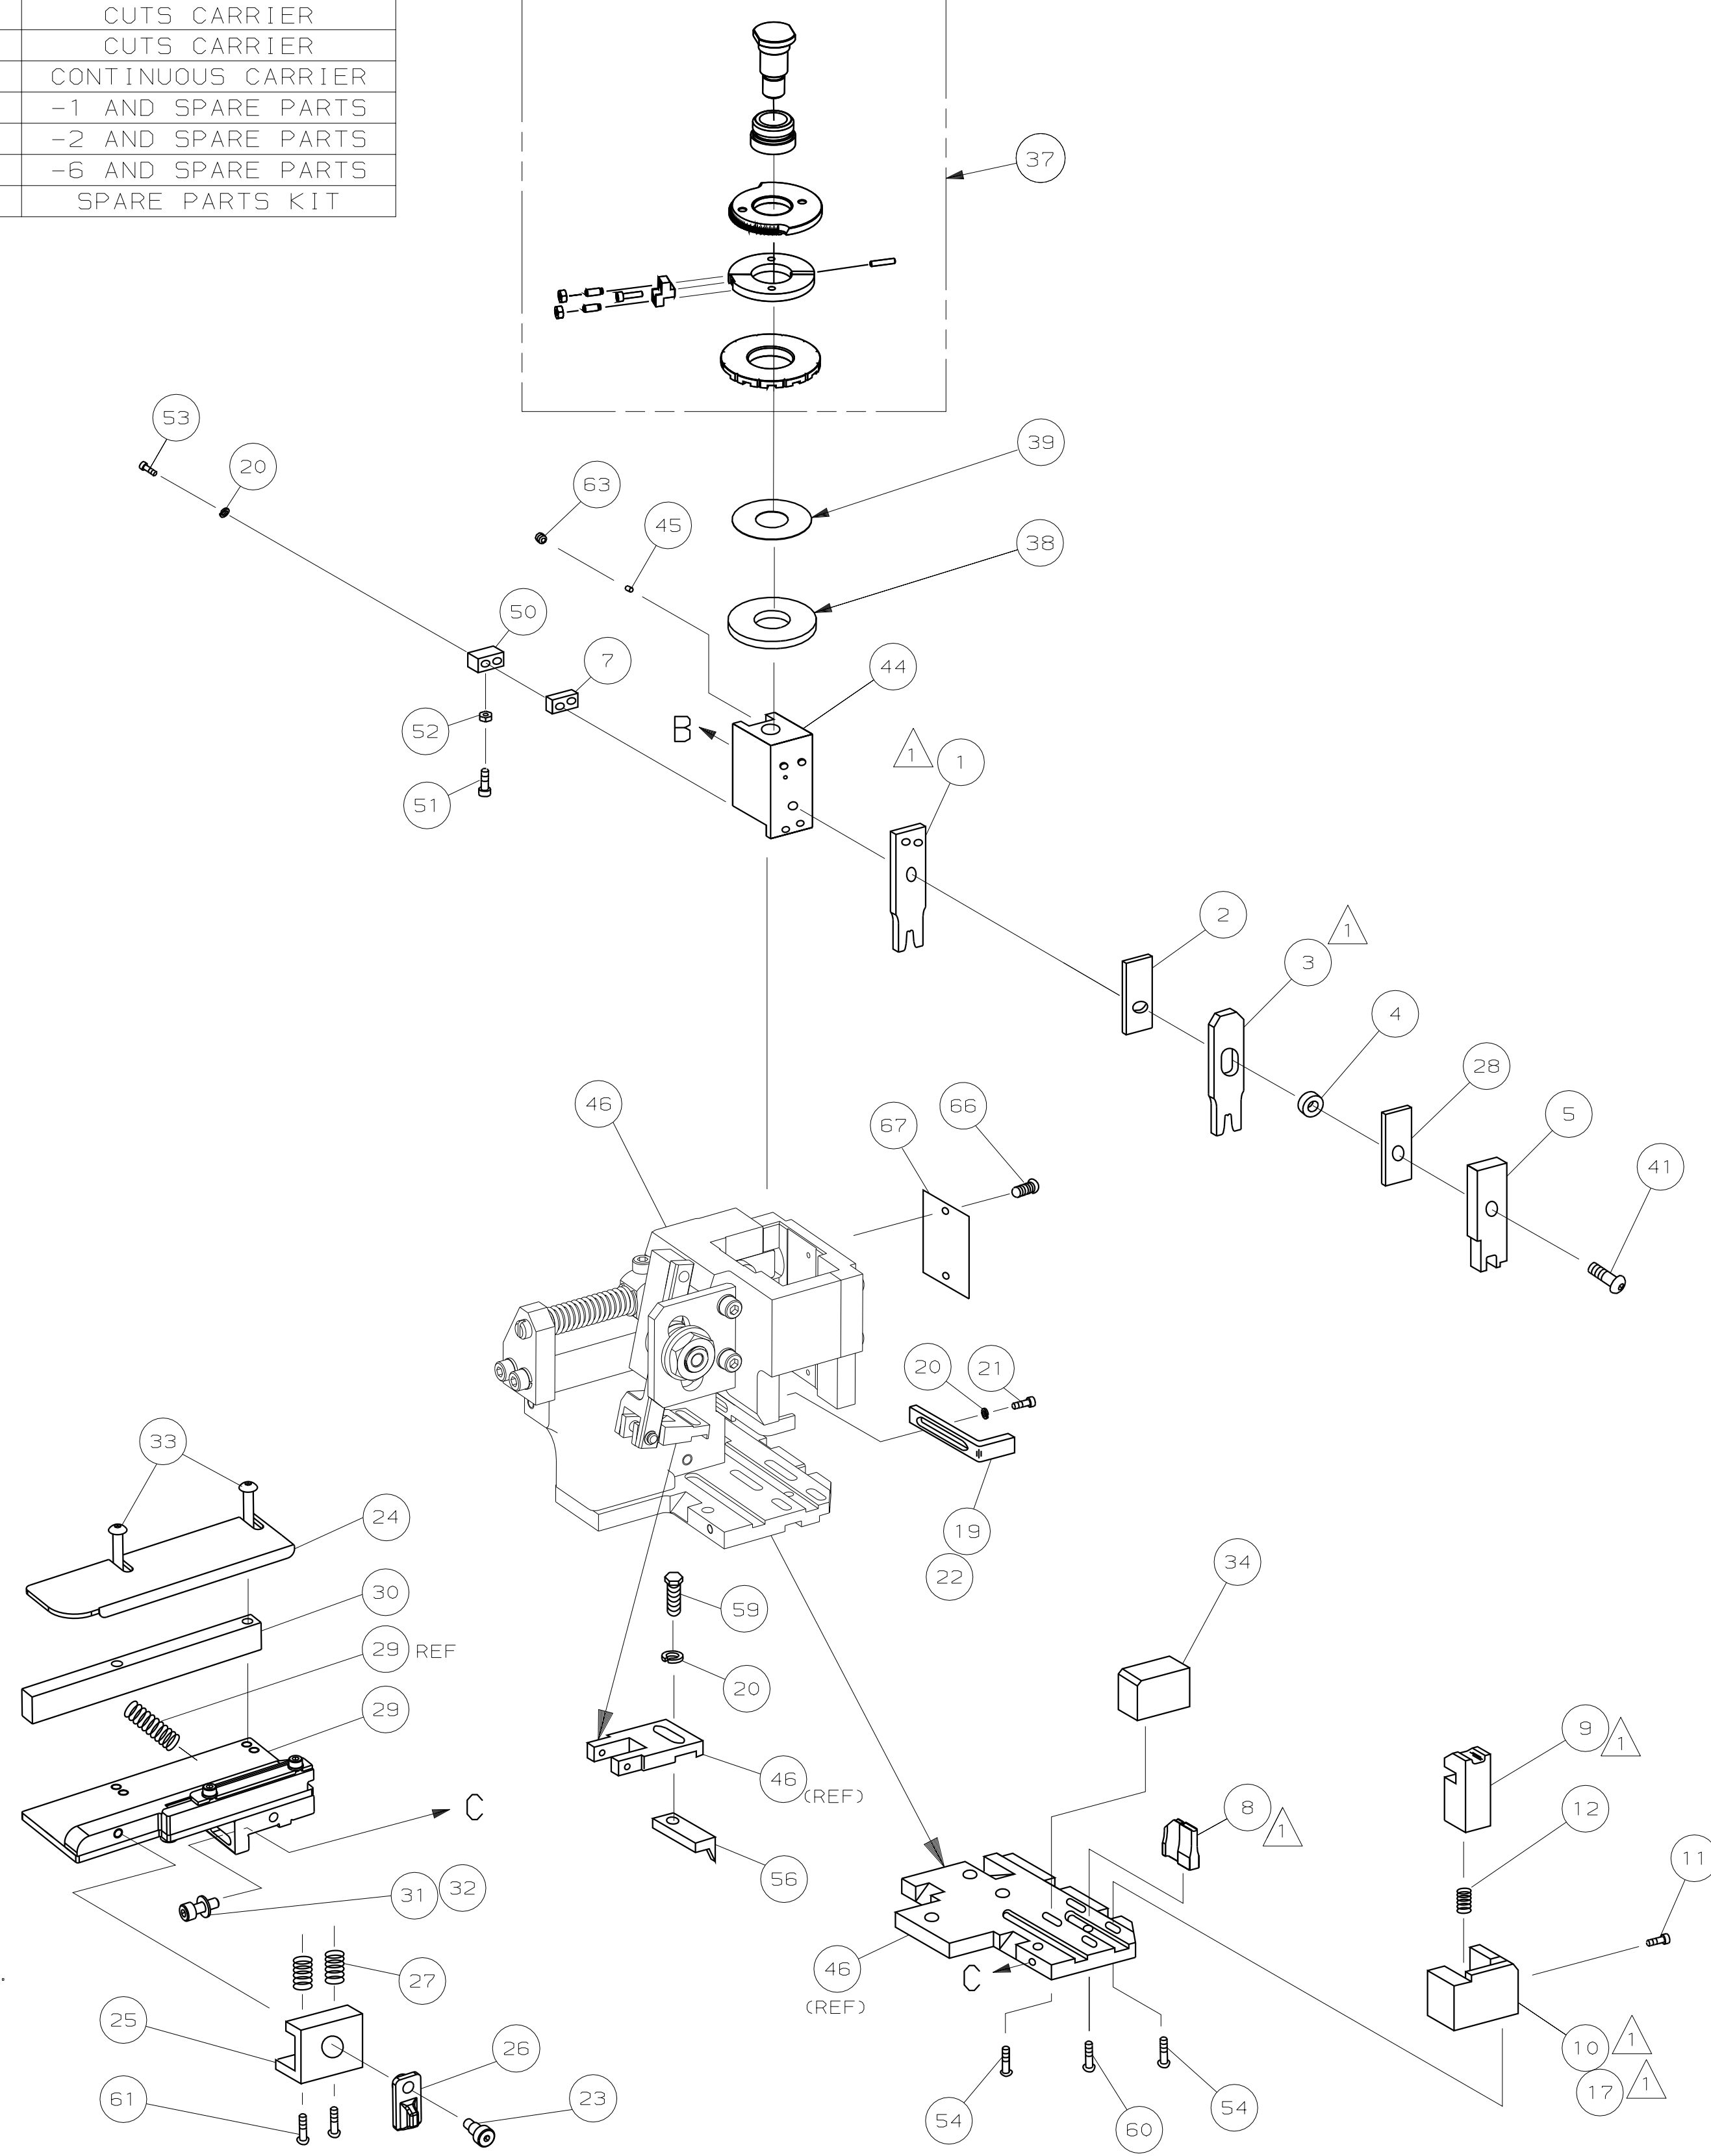

* WARNING:

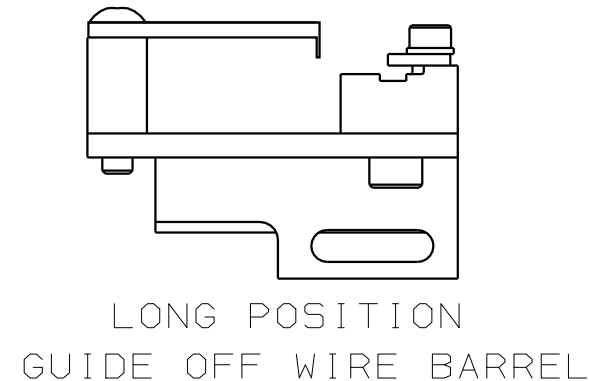ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.



B	ECR 05-012041	GB	9-05
A	SEE ECR 015A-0218-04	MC	MAR04
P	REVISION RECORD	APP	DATE

-	1	1	1	1	1	1	1528345	PRINT, APPLICATOR LOG SHEET	73
-	1	1	1	1	1	1	1338705-3	DOCUMENTATION PACKAGE	72
-	-	-	-	-	-	-	-	-	71
-	-	-	-	-	-	-	-	-	70
-	-	-	-	-	-	-	-	-	69
-	-	-	-	-	-	-	-	-	68
-	1	1	1	1	1	1	461264-5	PLATE, IDENTIFICATION	67
-	2	2	2	2	2	2	21017-2	SCR,DRIVE (#2x.19) ID PLATE	66
-	-	-	-	-	-	-	-	-	65
-	1	1	1	1	1	1	3-18031-0	SCR,SKT SET (M6X6) RAM	64
-	-	-	-	-	-	-	-	-	63
-	2	2	2	2	2	2	1-18024-5	SCR,BHC (M5X25) DRAG	62
-	1	1	1	1	1	1	18024-7	SCR,BHC (M4X10) ANVIL	61
-	1	1	1	1	1	1	5-18022-2	SCR,HEX (M4X8) FEED FINGER	60
-	-	-	-	-	-	-	-	-	59
-	-	-	-	-	-	-	-	-	58
-	-	-	-	-	-	-	-	-	57
-	1	1	1	1	1	1	1333240-1	PAWL, FEED	56
-	-	-	-	-	-	-	-	-	55
-	4	4	4	4	4	4	18024-8	SCR,BHC (M4X12) SHEAR HOLDER	54
-	2	2	2	2	2	2	1-18023-3	SCR,SHC (M4X16) TERM HLD DWN	53
-	1	1	1	1	1	1	18030-1	NUT,HEX (M3) HOLD DOWN	52
-	1	1	1	1	1	1	811242-5	BUMPER, HOLDDOWN	51
-	1	1	1	1	1	1	690753-2	SPACER, TONKER	50
-	1	1	1	1	1	1	18024-3	SCR,BHC (M3X10) CAM	49
-	-	1	-	-	1	-	1338675-1	CAM, PRE FEED 30 & 40 mm ST	48
-	1	-	1	1	-	1	1338676-1	CAM, POST FEED 30 & 40 mm ST	47
-	1	1	1	1	1	1	1320999-3	APPLICATOR BASIC SUBASSY	46
-	1	1	1	1	1	1	690191-1	PLUG, NYLON	45
-	1	1	1	1	1	1	1338660-1	RAM	44
-	-	-	-	-	-	-	-	-	43
-	-	-	-	-	-	-	-	-	42
-	1	1	1	1	1	1	2-18024-6	SCR,BHC (M8X25) RAM	41
-	-	-	-	-	-	-	-	-	40
-	1	1	1	1	1	1	690125-1	SHIM SUBASSY	39
-	1	1	1	1	1	1	469367-8	SPACER, FINE ADJUST	38
-	1	1	1	1	1	1	879103-3	FINE ADJUST HEAD SUBASSY	37
-	-	-	-	-	-	-	-	-	36
-	-	-	-	-	-	-	-	-	35
-	1	1	1	1	1	1	1320934-6	SUPPORT, TERMINAL	34
-	2	2	2	2	2	2	1-18024-0	SCR,BHC (M4X20) STRIP GUIDE	33
-	1	1	1	1	1	1	18027-2	WASHER, FLAT (M4)	32
-	1	1	1	1	1	1	1-18023-2	SCR,SKT CAP (M4X12) MOUNT BLOCK	31
-	1	1	1	1	1	1	1320908-3	SPACER, STRIP GUIDE	30
-	1	1	1	1	1	1	1633073-7	STRIP GUIDE PLATE ASSY	29
-	1	1	1	1	1	1	455888-1	SPACER, FRONT SHEAR DEP	28
-	2	2	2	2	2	2	1-22284-0	SPRING, DRAG	27
-	1	1	1	1	1	1	356835-1	LEVER, DRAG RELEASE	26
-	1	1	1	1	1	1	240792-1	DRAG, TERMINAL	25
-	1	1	1	1	1	1	1320928-2	PLATE, STRIP GUIDE	24
-	1	1	1	1	1	1	980371-4	SCR,SHC SHLD	23
-	1	-	1	1	-	1	690472-2	STRIPPER	22
-	1	1	1	1	1	1	1-18023-1	SCR,SHC (M4X10) STRIPPER	21
-	4	4	4	4	4	4	18025-2	WASHER, LOCK (M4) STRIPPER	20
-	-	1	-	-	1	-	690472-1	STRIPPER	19
-	-	-	-	-	-	-	-	-	18
-	1	-	-	1	-	-	1338684-1	HOLDER, SHEAR, FRONT (NO-CUT)	17
-	-	-	-	-	-	-	-	-	16
-	-	-	-	-	-	-	-	-	15
-	-	-	-	-	-	-	-	-	14
-	-	-	-	-	-	-	-	-	13
-	1	1	1	1	1	1	5-22280-0	SPRING, SHEAR	12
-	1	1	1	1	1	1	356885-4	STOP, SHEAR	11
-	-	1	1	-	1	1	1320921-1	HOLDER, SHEAR, FRONT (CUT)	10
-	1	1	1	1	1	1	462006-1	SHEAR, FLOAT (FRONT)	9
1	2	2	2	1	1	1	5-1333203-5	ANVIL	8
-	1	1	1	1	1	1	2-240641-4	SPACER, DEPRESSOR (REAR)	7
-	-	-	-	-	-	-	-	-	6
-	1	1	1	1	1	1	2-455889-0	DEPRESSOR, SHEAR (FRONT)	5
-	1	1	1	1	1	1	238011-4	SPACER, BLOCK CRIMPER	4
1	2	2	2	1	1	1	1-854830-4	CRIMPER, INSULATION	3
-	1	1	1	1	1	1	455888-5	SPACER, CRIMPER	2
1	2	2	2	1	1	1	5-657555-4	CRIMPER, WIRE	1
-77	-76	-72	-71	-6	-2	-1	PART NO	DESCRIPTION	ITEM NO
							REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)		
QTY REQD PER ASSY							PARTS LIST		
							DIMENSIONS: mm [INCHES]	MATL	FIN
							DO NOT SCALE PRINT.		
							TOLERANCES UNLESS OTHERWISE SPECIFIED:		
							1 PLC DEC ±		
							2 PLC DEC ±		
							3 PLC DEC ±		
							ANGLES ±		
							SURF TEXTURE: ✓		
							REMOVE BURRS, BREAK SHARP EDGES RO.38 MAX		
							DR	27JAN04	APP
							L.L.OFTHOUSE	F.BACKHURST	
							CHK	REL	24-03-04
								M.CLIFFORD	
							AMP Tyco Electronics Harrisburg, PA 17105-3608		
							NAME	FINE ADJ SIDE FD HD-I APPL	MACHINE REF
							SCALE	1 OF 1	REV
							DWG NO	1528345	B
							CAGE CODE	00779	RESTRICTED TO
							CUSTOMER AND ASSEMBLY DRAWING		

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9